

ISC2

Exam Questions SSCP

System Security Certified Practitioner (SSCP)



NEW QUESTION 1

- (Topic 1)

Which of the following pairings uses technology to enforce access control policies?

- A. Preventive/Administrative
- B. Preventive/Technical
- C. Preventive/Physical
- D. Detective/Administrative

Answer: B

Explanation:

The preventive/technical pairing uses technology to enforce access control policies.

TECHNICAL CONTROLS

Technical security involves the use of safeguards incorporated in computer hardware, operations or applications software, communications hardware and software, and related devices. Technical controls are sometimes referred to as logical controls.

Preventive Technical Controls

Preventive technical controls are used to prevent unauthorized personnel or programs from gaining remote access to computing resources. Examples of these controls include:

Access control software. Antivirus software. Library control systems. Passwords.

Smart cards. Encryption.

Dial-up access control and callback systems.

Preventive Physical Controls

Preventive physical controls are employed to prevent unauthorized personnel from entering computing facilities (i.e., locations housing computing resources, supporting utilities, computer hard copy, and input data media) and to help protect against natural disasters. Examples of these controls include:

Backup files and documentation. Fences.

Security guards. Badge systems. Double door systems. Locks and keys. Backup power.

Biometric access controls. Site selection.

Fire extinguishers.

Preventive Administrative Controls

Preventive administrative controls are personnel-oriented techniques for controlling people's behavior to ensure the confidentiality, integrity, and availability of computing data and programs. Examples of preventive administrative controls include:

Security awareness and technical training. Separation of duties.

Procedures for recruiting and terminating employees. Security policies and procedures.

Supervision.

Disaster recovery, contingency, and emergency plans. User registration for computer access.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 34.

NEW QUESTION 2

- (Topic 1)

Which type of password token involves time synchronization?

- A. Static password tokens
- B. Synchronous dynamic password tokens
- C. Asynchronous dynamic password tokens
- D. Challenge-response tokens

Answer: B

Explanation:

Synchronous dynamic password tokens generate a new unique password value at fixed time intervals, so the server and token need to be synchronized for the password to be accepted.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 37).

Also check out: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, chapter 4: Access Control (page 136).

NEW QUESTION 3

- (Topic 1)

The type of discretionary access control (DAC) that is based on an individual's identity is also called:

- A. Identity-based Access control
- B. Rule-based Access control
- C. Non-Discretionary Access Control
- D. Lattice-based Access control

Answer: A

Explanation:

An identity-based access control is a type of Discretionary Access Control (DAC) that is based on an individual's identity.

DAC is good for low level security environment. The owner of the file decides who has access to the file.

If a user creates a file, he is the owner of that file. An identifier for this user is placed in the file header and/or in an access control matrix within the operating system.

Ownership might also be granted to a specific individual. For example, a manager for a certain department might be made the owner of the files and resources within her department. A system that uses discretionary access control (DAC) enables the owner of the resource to specify which subjects can access specific resources.

This model is called discretionary because the control of access is based on the discretion of the owner. Many times department managers, or business unit managers, are the owners of the data within their specific department. Being the owner, they can specify who should have access and who should not.

Reference(s) used for this question:

Harris, Shon (2012-10-18). CISSP All-in-One Exam Guide, 6th Edition (p. 220). McGraw- Hill . Kindle Edition.

NEW QUESTION 4

- (Topic 1)

A potential problem related to the physical installation of the Iris Scanner in regards to the usage of the iris pattern within a biometric system is:

- A. concern that the laser beam may cause eye damage
- B. the iris pattern changes as a person grows older.
- C. there is a relatively high rate of false accepts.
- D. the optical unit must be positioned so that the sun does not shine into the aperture.

Answer: D

Explanation:

Because the optical unit utilizes a camera and infrared light to create the images, sun light can impact the aperture so it must not be positioned in direct light of any type. Because the subject does not need to have direct contact with the optical reader, direct light can impact the reader.

An Iris recognition is a form of biometrics that is based on the uniqueness of a subject's iris. A camera like device records the patterns of the iris creating what is known as Iriscode.

It is the unique patterns of the iris that allow it to be one of the most accurate forms of biometric identification of an individual. Unlike other types of biometrics, the iris rarely changes over time. Fingerprints can change over time due to scaring and manual labor, voice patterns can change due to a variety of causes, hand geometry can also change as well. But barring surgery or an accident it is not usual for an iris to change. The subject has a high-resolution image taken of their iris and this is then converted to Iriscode. The current standard for the Iriscode was developed by John Daugman. When the subject attempts to be authenticated an infrared light is used to capture the iris image and this image is then compared to the Iriscode. If there is a match the subject's identity is confirmed. The subject does not need to have direct contact with the optical reader so it is a less invasive means of authentication then retinal scanning would be.

Reference(s) used for this question: AIO, 3rd edition, Access Control, p 134. AIO, 4th edition, Access Control, p 182.

Wikipedia - http://en.wikipedia.org/wiki/Iris_recognition The following answers are incorrect:

concern that the laser beam may cause eye damage. The optical readers do not use laser so, concern that the laser beam may cause eye damage is not an issue.
the iris pattern changes as a person grows older. The question asked about the physical installation of the scanner, so this was not the best answer. If the question would have been about long term problems then it could have been the best choice. Recent research has shown that Irises actually do change over time:

<http://www.nature.com/news/ageing-eyes-hinder-biometric-scans-1.10722>

there is a relatively high rate of false accepts. Since the advent of the Iriscode there is a very low rate of false accepts, in fact the algorithm used has never had a false match. This all depends on the quality of the equipment used but because of the uniqueness of the iris even when comparing identical twins, iris patterns are unique.

NEW QUESTION 5

- (Topic 1)

What refers to legitimate users accessing networked services that would normally be restricted to them?

- A. Spoofing
- B. Piggybacking
- C. Eavesdropping
- D. Logon abuse

Answer: D

Explanation:

Unauthorized access of restricted network services by the circumvention of security access controls is known as logon abuse. This type of abuse refers to users who may be internal to the network but access resources they would not normally be allowed. Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 3: Telecommunications and Network Security (page 74).

NEW QUESTION 6

- (Topic 1)

Which of the following would be used to implement Mandatory Access Control (MAC)?

- A. Clark-Wilson Access Control
- B. Role-based access control
- C. Lattice-based access control
- D. User dictated access control

Answer: C

Explanation:

The lattice is a mechanism use to implement Mandatory Access Control (MAC)

Under Mandatory Access Control (MAC) you have: Mandatory Access Control

Under Non Discretionary Access Control (NDAC) you have: Rule-Based Access Control
Role-Based Access Control

Under Discretionary Access Control (DAC) you have: Discretionary Access Control

The Lattice Based Access Control is a type of access control used to implement other access control method. A lattice is an ordered list of elements that has a least upper bound and a most lower bound. The lattice can be used for MAC, DAC, Integrity level, File Permission, and more

For example in the case of MAC, if we look at common government classifications, we have the following:

TOP SECRET

SECRET -----I am the user at secret CONFIDENTIAL

SENSITIVE BUT UNCLASSIFIED UNCLASSIFIED

If you look at the diagram above where I am a user at SECRET it means that I can access document at lower classification but not document at TOP SECRET.

The lattice is a list of ORDERED ELEMENT, in this case the ordered elements are classification levels. My least upper bound is SECRET and my most lower bound is UNCLASSIFIED.

However the lattice could also be used for Integrity Levels such as: VERY HIGH

HIGH

MEDIUM -----I am a user, process, application at the medium level LOW

VERY LOW

In the case of Integrity levels you have to think about TRUST. Of course if I take for example the the VISTA operating system which is based on Biba then Integrity Levels would be used. As a user having access to the system I cannot tell a process running with administrative privilege what to do. Else any users on the system could take control of the system by getting highly privilege process to do things on their behalf. So no read down would be allowed in this case and this is an example of the Biba model.

Last but not least the lattice could be use for file permissions: RWX

RW -----User at this level

R

If I am a user with READ and WRITE (RW) access privilege then I cannot execute the file because I do not have execute permission which is the X under linux and UNIX.

Many people confuse the Lattice Model and many books says MAC = LATTICE, however the lattice can be use for other purposes.

There is also Role Based Access Control (RBAC) that exists out there. It COULD be used to simulate MAC but it is not MAC as it does not make use of Label on objects indicating sensitivity and categories. MAC also require a clearance that dominates the object.

You can get more info about RBAC at:<http://csrc.nist.gov/groups/SNS/rbac/faq.html#03> Also note that many book uses the same acronym for Role Based Access Control and Rule

Based Access Control which is RBAC, this can be confusing.

The proper way of writing the acronym for Rule Based Access Control is RuBAC, unfortunately it is not commonly used.

References:

There is a great article on technet that talks about the lattice in VISTA: <http://blogs.technet.com/b/steriley/archive/2006/07/21/442870.aspx> also see:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 33).

and

http://www.microsoft-watch.com/content/vista/gaging_vistas_integrity.html

NEW QUESTION 7

- (Topic 1)

Which of the following is a trusted, third party authentication protocol that was developed under Project Athena at MIT?

- A. Kerberos
- B. SESAME
- C. KryptoKnight
- D. NetSP

Answer: A

Explanation:

Kerberos is a trusted, third party authentication protocol that was developed under Project Athena at MIT.

Kerberos is a network authentication protocol. It is designed to provide strong authentication for client/server applications by using secret-key cryptography. A free implementation of this protocol is available from the Massachusetts Institute of Technology. Kerberos is available in many commercial products as well.

The Internet is an insecure place. Many of the protocols used in the Internet do not provide any security. Tools to "sniff" passwords off of the network are in common use by systems crackers. Thus, applications which send an unencrypted password over the network are extremely vulnerable. Worse yet, other client/server applications rely on the client program to be "honest" about the identity of the user who is using it. Other applications rely on the client to restrict its activities to those which it is allowed to do, with no other enforcement by the server.

Some sites attempt to use firewalls to solve their network security problems. Unfortunately, firewalls assume that "the bad guys" are on the outside, which is often a very bad

assumption. Most of the really damaging incidents of computer crime are carried out by insiders. Firewalls also have a significant disadvantage in that they restrict how your users can use the Internet. (After all, firewalls are simply a less extreme example of the dictum that there is nothing more secure then a computer which is not connected to the network --- and powered off!) In many places, these restrictions are simply unrealistic and unacceptable.

Kerberos was created by MIT as a solution to these network security problems. The Kerberos protocol uses strong cryptography so that a client can prove its identity to a server (and vice versa) across an insecure network connection. After a client and server have used Kerberos to prove their identity, they can also encrypt all of their communications to assure privacy and data integrity as they go about their business.

Kerberos is freely available from MIT, under a copyright permission notice very similar to the one used for the BSD operating and X11 Windowing system. MIT provides Kerberos in source form, so that anyone who wishes to use it may look over the code for themselves and assure themselves that the code is trustworthy. In addition, for those who prefer to rely on a professional supported product, Kerberos is available as a product from many different vendors.

In summary, Kerberos is a solution to your network security problems. It provides the tools of authentication and strong cryptography over the network to help you secure your information systems across your entire enterprise. We hope you find Kerberos as useful as it has been to us. At MIT, Kerberos has been invaluable to our Information/Technology architecture.

KryptoKnight is a Peer to Peer authentication protocol incorporated into the NetSP product from IBM.

SESAME is an authentication and access control protocol, that also supports communication confidentiality and integrity. It provides public key based authentication along with the Kerberos style authentication, that uses symmetric key cryptography. Sesame supports the Kerberos protocol and adds some security extensions like public key based authentication and an ECMA-style Privilege Attribute Service. The complete Sesame protocol is a two step process. In the first step, the client successfully authenticates itself to the Authentication Server and obtains a ticket that can be presented to the Privilege Attribute Server. In the second step, the initiator obtains proof of his access rights in the form of Privilege Attributes Certificate (PAC). The PAC is a specific form of Access Control Certificate as defined in the ECMA-219 document. This document describes the extensions to Kerberos for public key based authentication as adopted in Sesame. SESAME, KryptoKnight, and NetSP never took off and the protocols are no longer commonly used.

References:

<http://www.cmf.nrl.navy.mil/CCS/people/kenh/kerberos-faq.html#whatis> and

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 40.

NEW QUESTION 8

- (Topic 1)

In the Bell-LaPadula model, the Star-property is also called:

- A. The simple security property
- B. The confidentiality property
- C. The confinement property
- D. The tranquility property

Answer: B

Explanation:

The Bell-LaPadula model focuses on data confidentiality and access to classified information, in contrast to the Biba Integrity Model which describes rules for the protection of data integrity.

In this formal model, the entities in an information system are divided into subjects and objects.

The notion of a "secure state" is defined, and it is proven that each state transition preserves security by moving from secure state to secure state, thereby proving that the system satisfies the security objectives of the model.

The Bell-LaPadula model is built on the concept of a state machine with a set of allowable states in a system. The transition from one state to another state is defined by transition functions.

A system state is defined to be "secure" if the only permitted access modes of subjects to objects are in accordance with a security policy.

To determine whether a specific access mode is allowed, the clearance of a subject is compared to the classification of the object (more precisely, to the combination of classification and set of compartments, making up the security level) to determine if the subject is authorized for the specific access mode.

The clearance/classification scheme is expressed in terms of a lattice. The model defines two mandatory access control (MAC) rules and one discretionary access control (DAC) rule with three security properties:

The Simple Security Property - a subject at a given security level may not read an object at a higher security level (no read-up).

The property (read "star"-property) - a subject at a given security level must not write to any object at a lower security level (no write-down). The property is also known as the Confinement property.

The Discretionary Security Property - use an access control matrix to specify the discretionary access control.

The transfer of information from a high-sensitivity document to a lower-sensitivity document may happen in the Bell-LaPadula model via the concept of trusted subjects. Trusted Subjects are not restricted by the property. Untrusted subjects are.

Trusted Subjects must be shown to be trustworthy with regard to the security policy. This security model is directed toward access control and is characterized by the phrase: "no read up, no write down." Compare the Biba model, the Clark-Wilson model and the Chinese Wall.

With Bell-LaPadula, users can create content only at or above their own security level (i.e. secret researchers can create secret or top-secret files but may not create public files; no write-down). Conversely, users can view content only at or below their own security level

(i.e. secret researchers can view public or secret files, but may not view top-secret files; no read-up).

Strong Property

The Strong Property is an alternative to the Property in which subjects may write to objects with only a matching security level. Thus, the write-up operation permitted in the usual Property is not present, only a write-to-same level operation. The Strong Property is usually discussed in the context of multilevel database management systems and is motivated by integrity concerns.

Tranquility principle

The tranquility principle of the Bell-LaPadula model states that the classification of a subject or object does not change while it is being referenced. There are two forms to the tranquility principle: the "principle of strong tranquility" states that security levels do not change during the normal operation of the system and the "principle of weak tranquility" states that security levels do not change in a way that violates the rules of a given security policy.

Another interpretation of the tranquility principles is that they both apply only to the period of time during which an operation involving an object or subject is occurring. That is, the strong tranquility principle means that an object's security level/label will not change during an operation (such as read or write); the weak tranquility principle means that an object's security level/label may change in a way that does not violate the security policy during an operation.

Reference(s) used for this question: http://en.wikipedia.org/wiki/Biba_Model

http://en.wikipedia.org/wiki/Mandatory_access_control http://en.wikipedia.org/wiki/Discretionary_access_control http://en.wikipedia.org/wiki/Clark-Wilson_model

http://en.wikipedia.org/wiki/Brewer_and_Nash_model

NEW QUESTION 9

- (Topic 1)

What is the most critical characteristic of a biometric identifying system?

- A. Perceived intrusiveness
- B. Storage requirements
- C. Accuracy
- D. Scalability

Answer: C

Explanation:

Accuracy is the most critical characteristic of a biometric identifying verification system.

Accuracy is measured in terms of false rejection rate (FRR, or type I errors) and false acceptance rate (FAR or type II errors).

The Crossover Error Rate (CER) is the point at which the FRR equals the FAR and has become the most important measure of biometric system accuracy.

Source: TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition (volume 1), 2000, CRC Press, Chapter 1, Biometric Identification (page 9).

NEW QUESTION 10

- (Topic 1)

In discretionary access environments, which of the following entities is authorized to grant information access to other people?

- A. Manager
- B. Group Leader
- C. Security Manager
- D. Data Owner

Answer: D

Explanation:

In Discretionary Access Control (DAC) environments, the user who creates a file is also considered the owner and has full control over the file including the ability to set permissions for that file.

The following answers are incorrect:

manager. Is incorrect because in Discretionary Access Control (DAC) environments it is the owner/user that is authorized to grant information access to other people.

group leader. Is incorrect because in Discretionary Access Control (DAC) environments it is the owner/user that is authorized to grant information access to other people.

security manager. Is incorrect because in Discretionary Access Control (DAC) environments it is the owner/user that is authorized to grant information access to other people.

IMPORTANT NOTE:

The term Data Owner is also used within Classifications as well. Under the subject of classification the Data Owner is a person from management who has been entrusted with a data set that belongs to the company. For example it could be the Chief Financial Officer (CFO) who is entrusted with all of the financial data for a

company. As such the CFO would determine the classification of the financial data and who can access as well. The Data Owner would then tell the Data Custodian (a technical person) what the classification and need to know is on the specific set of data. The term Data Owner under DAC simply means whoever created the file and as the creator of the file the owner has full access and can grant access to other subjects based on their identity.

NEW QUESTION 10

- (Topic 1)

Controls to keep password sniffing attacks from compromising computer systems include which of the following?

- A. static and recurring passwords.
- B. encryption and recurring passwords.
- C. one-time passwords and encryption.
- D. static and one-time passwords.

Answer: C

Explanation:

To minimize the chance of passwords being captured one-time passwords would prevent a password sniffing attack because once used it is no longer valid. Encryption will also minimize these types of attacks.

The following answers are correct:

static and recurring passwords. This is incorrect because if there is no encryption then someone password sniffing would be able to capture the password much easier if it never changed.

encryption and recurring passwords. This is incorrect because while encryption helps, recurring passwords do nothing to minimize the risk of passwords being captured.

static and one-time passwords. This is incorrect because while one-time passwords will prevent these types of attacks, static passwords do nothing to minimize the risk of passwords being captured.

NEW QUESTION 13

- (Topic 1)

Which of the following is NOT a type of motion detector?

- A. Photoelectric sensor
- B. Passive infrared sensors
- C. Microwave Sensor.
- D. Ultrasonic Sensor.

Answer: A

Explanation:

A photoelectric sensor does not "directly" sense motion there is a narrow beam that won't set off the sensor unless the beam is broken. Photoelectric sensors, along with dry contact switches, are a type of perimeter intrusion detector.

All of the other answers are valid types of motion detectors types.

The content below on the different types of sensors is from Wikipedia: Indoor Sensors

These types of sensors are designed for indoor use. Outdoor use would not be advised due to false alarm vulnerability and weather durability. Passive infrared detectors



C:\Users\MCS\Desktop\1.jpg Passive Infrared Sensor

The passive infrared detector (PIR) is one of the most common detectors found in household and small business environments because it offers affordable and reliable functionality. The term passive means the detector is able to function without the need to generate and radiate its own energy (unlike ultrasonic and microwave volumetric intrusion detectors that are ??active?? in operation). PIRs are able to distinguish if an infrared emitting object is present by first learning the ambient temperature of the monitored space and then detecting a change in the temperature caused by the presence of an object. Using the principle of differentiation, which is a check of presence or nonpresence, PIRs verify if an intruder or object is actually there. Creating individual zones of detection where each zone comprises one or more layers can achieve differentiation. Between the zones there are areas of no sensitivity (dead zones) that are used by the sensor for comparison.

Ultrasonic detectors

Using frequencies between 15 kHz and 75 kHz, these active detectors transmit ultrasonic sound waves that are inaudible to humans. The Doppler shift principle is the underlying method of operation, in which a change in frequency is detected due to object motion. This is caused when a moving object changes the frequency of sound waves around it. Two conditions must occur to successfully detect a Doppler shift event:

There must be motion of an object either towards or away from the receiver.

The motion of the object must cause a change in the ultrasonic frequency to the receiver relative to the transmitting frequency.

The ultrasonic detector operates by the transmitter emitting an ultrasonic signal into the area to be protected. The sound waves are reflected by solid objects (such as the surrounding floor, walls and ceiling) and then detected by the receiver. Because ultrasonic waves are transmitted through air, then hard-surfaced objects tend to reflect most of the ultrasonic energy, while soft surfaces tend to absorb most energy.

When the surfaces are stationary, the frequency of the waves detected by the receiver will be equal to the transmitted frequency. However, a change in frequency will occur as a result of the Doppler principle, when a person or object is moving towards or away from the detector. Such an event initiates an alarm signal. This

technology is considered obsolete by many alarm professionals, and is not actively installed.

Microwave detectors

This device emits microwaves from a transmitter and detects any reflected microwaves or reduction in beam intensity using a receiver. The transmitter and receiver are usually combined inside a single housing (monostatic) for indoor applications, and separate housings (bistatic) for outdoor applications. To reduce false alarms this type of detector is usually combined with a passive infrared detector or "Dualtec" alarm.

Microwave detectors respond to a Doppler shift in the frequency of the reflected energy, by a phase shift, or by a sudden reduction of the level of received energy. Any of these effects may indicate motion of an intruder.

Photo-electric beams

Photoelectric beam systems detect the presence of an intruder by transmitting visible or infrared light beams across an area, where these beams may be obstructed. To improve the detection surface area, the beams are often employed in stacks of two or more. However, if an intruder is aware of the technology's presence, it can be avoided. The technology can be an effective long-range detection system, if installed in stacks of three or more where the transmitters and receivers are staggered to create a fence-like barrier. Systems are available for both internal and external applications. To prevent a clandestine attack using a secondary light source being used to hold the detector in a 'sealed' condition whilst an intruder passes through, most systems use and detect a modulated light source.

Glass break detectors

The glass break detector may be used for internal perimeter building protection. When glass breaks it generates sound in a wide band of frequencies. These can range from infrasonic, which is below 20 hertz (Hz) and can not be heard by the human ear, through the audio band from 20 Hz to 20 kHz which humans can hear, right up to ultrasonic, which is above 20 kHz and again cannot be heard. Glass break acoustic detectors are mounted in close proximity to the glass panes and listen for sound frequencies associated with glass breaking. Seismic glass break detectors are different in that they are installed on the glass pane. When glass breaks it produces specific shock frequencies which travel through the glass and often through the window frame and the surrounding walls and ceiling. Typically, the most intense frequencies generated are between 3 and 5 kHz, depending on the type of glass and the presence of a plastic interlayer. Seismic glass break detectors "feel" these shock frequencies and in turn generate an alarm condition.

The more primitive detection method involves gluing a thin strip of conducting foil on the inside of the glass and putting low-power electrical current through it.

Breaking the glass is practically guaranteed to tear the foil and break the circuit.

Smoke, heat, and carbon monoxide detectors



C:\Users\MCS\Desktop\1.jpg Heat Detection System

Most systems may also be equipped with smoke, heat, and/or carbon monoxide detectors. These are also known as 24 hour zones (which are on at all times). Smoke detectors and heat detectors protect from the risk of fire and carbon monoxide detectors protect from the risk of carbon monoxide. Although an intruder alarm panel may also have these detectors connected, it may not meet all the local fire code requirements of a fire alarm system.

Other types of volumetric sensors could be:

Active Infrared

Passive Infrared/Microwave combined Radar

Acoustical Sensor/Audio Vibration Sensor (seismic) Air Turbulence

NEW QUESTION 14

- (Topic 1)

Which integrity model defines a constrained data item, an integrity verification procedure and a transformation procedure?

- A. The Take-Grant model
- B. The Biba integrity model
- C. The Clark Wilson integrity model
- D. The Bell-LaPadula integrity model

Answer: C

Explanation:

The Clark Wilson integrity model addresses the three following integrity goals: 1) data is protected from modification by unauthorized users; 2) data is protected from unauthorized modification by authorized users; and 3) data is internally and externally consistent. It also defines a Constrained Data Item (CDI), an Integrity Verification Procedure (IVP), a Transformation Procedure (TP) and an Unconstrained Data item. The Bell-LaPadula and Take-Grant models are not integrity models.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architecture and Models (page 205).

NEW QUESTION 16

- (Topic 1)

Which one of the following authentication mechanisms creates a problem for mobile users?

- A. Mechanisms based on IP addresses
- B. Mechanism with reusable passwords
- C. one-time password mechanism.
- D. challenge response mechanism.

Answer: A

Explanation:

Anything based on a fixed IP address would be a problem for mobile users because their location and its associated IP address can change from one time to the next. Many providers will assign a new IP every time the device would be restarted. For example an insurance adjuster using a laptop to file claims online. He goes

to a different client each time and the address changes every time he connects to the ISP.

NOTE FROM CLEMENT:

The term MOBILE in this case is synonymous with Road Warriors where a user is constantly traveling and changing location. With smartphone today that may not be an issue but it would be an issue for laptops or WIFI tablets. Within a carrier network the IP will tend to be the same and would change rarely. So this question is more applicable to devices that are not cellular devices but in some cases this issue could affect cellular devices as well.

The following answers are incorrect:

mechanism with reusable password. This is incorrect because reusable password mechanism would not present a problem for mobile users. They are the least secure and change only at specific interval.

one-time password mechanism. This is incorrect because a one-time password mechanism would not present a problem for mobile users. Many are based on a clock and not on the IP address of the user.

challenge response mechanism. This is incorrect because challenge response mechanism would not present a problem for mobile users.

NEW QUESTION 18

- (Topic 1)

Which of the following access control models is based on sensitivity labels?

- A. Discretionary access control
- B. Mandatory access control
- C. Rule-based access control
- D. Role-based access control

Answer: B

Explanation:

Access decisions are made based on the clearance of the subject and the sensitivity label of the object.

Example: Eve has a "Secret" security clearance and is able to access the "Mugwump Missile Design Profile" because its sensitivity label is "Secret." She is denied access to the "Presidential Toilet Tissue Formula" because its sensitivity label is "Top Secret."

The other answers are not correct because:

Discretionary Access Control is incorrect because in DAC access to data is determined by the data owner. For example, Joe owns the "Secret Chili Recipe" and grants read access to Charles.

Role Based Access Control is incorrect because in RBAC access decisions are made based on the role held by the user. For example, Jane has the role "Auditor" and that role includes read permission on the "System Audit Log."

Rule Based Access Control is incorrect because it is a form of MAC. A good example would be a Firewall where rules are defined and apply to anyone connecting through the firewall.

References:

All in One third edition, page 164. Official ISC2 Guide page 187.

NEW QUESTION 23

- (Topic 1)

Which of the following can best eliminate dial-up access through a Remote Access Server as a hacking vector?

- A. Using a TACACS+ server.
- B. Installing the Remote Access Server outside the firewall and forcing legitimate users to authenticate to the firewall.
- C. Setting modem ring count to at least 5.
- D. Only attaching modems to non-networked hosts.

Answer: B

Explanation:

Containing the dial-up problem is conceptually easy: by installing the Remote Access Server outside the firewall and forcing legitimate users to authenticate to the firewall, any access to internal resources through the RAS can be filtered as would any other connection coming from the Internet.

The use of a TACACS+ Server by itself cannot eliminate hacking.

Setting a modem ring count to 5 may help in defeating war-dialing hackers who look for modem by dialing long series of numbers.

Attaching modems only to non-networked hosts is not practical and would not prevent these hosts from being hacked.

Source: STREBE, Matthew and PERKINS, Charles, Firewalls 24seven, Sybex 2000, Chapter 2: Hackers.

NEW QUESTION 24

- (Topic 1)

Single Sign-on (SSO) is characterized by which of the following advantages?

- A. Convenience
- B. Convenience and centralized administration
- C. Convenience and centralized data administration
- D. Convenience and centralized network administration

Answer: B

Explanation:

Convenience -Using single sign-on users have to type their passwords only once when they first log in to access all the network resources; and Centralized Administration as some single sign-on systems are built around a unified server administration system. This allows a single administrator to add and delete accounts across the entire network from one user interface.

The following answers are incorrect:

Convenience - alone this is not the correct answer.

Centralized Data or Network Administration - these are thrown in to mislead the student. Neither are a benefit to SSO, as these specifically should not be allowed with just an SSO.

References: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, page 35.

TIPTON, Harold F. & HENRY, Kevin, Official (ISC)2 Guide to the CISSP CBK, 2007, page 180.

NEW QUESTION 29

- (Topic 1)

What is the PRIMARY use of a password?

- A. Allow access to files.
- B. Identify the user.
- C. Authenticate the user.
- D. Segregate various user's accesses.

Answer: C

Explanation:

Source: TIPTON, Hal, (ISC)2, Introduction to the CISSP Exam presentation.

NEW QUESTION 31

- (Topic 1)

The control measures that are intended to reveal the violations of security policy using software and hardware are associated with:

- A. Preventive/physical
- B. Detective/technical
- C. Detective/physical
- D. Detective/administrative

Answer: B

Explanation:

The detective/technical control measures are intended to reveal the violations of security policy using technical means.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 35.

NEW QUESTION 36

- (Topic 1)

Which of the following would assist the most in Host Based intrusion detection?

- A. audit trails.
- B. access control lists.
- C. security clearances.
- D. host-based authentication.

Answer: A

Explanation:

To assist in Intrusion Detection you would review audit logs for access violations.

The following answers are incorrect:

access control lists. This is incorrect because access control lists determine who has access to what but do not detect intrusions.

security clearances. This is incorrect because security clearances determine who has access to what but do not detect intrusions.

host-based authentication. This is incorrect because host-based authentication determine who have been authenticated to the system but do not detect intrusions.

NEW QUESTION 40

- (Topic 1)

Which of the following is not a physical control for physical security?

- A. lighting
- B. fences
- C. training
- D. facility construction materials

Answer: C

Explanation:

Some physical controls include fences, lights, locks, and facility construction materials. Some administrative controls include facility selection and construction, facility management, personnel controls, training, and emergency response and procedures.

From: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 3rd. Ed., Chapter 6, page 403.

NEW QUESTION 45

- (Topic 1)

In regards to information classification what is the main responsibility of information (data) owner?

- A. determining the data sensitivity or classification level
- B. running regular data backups
- C. audit the data users
- D. periodically check the validity and accuracy of the data

Answer: A

Explanation:

Making the determination to decide what level of classification the information requires is the main responsibility of the data owner.

The data owner within classification is a person from Management who has been entrusted with a data set that belong to the company. It could be for example the

Chief Financial Officer (CFO) who has been entrusted with all financial data or it could be the Human Resource Director who has been entrusted with all Human Resource data. The information owner will decide what classification will be applied to the data based on Confidentiality, Integrity, Availability, Criticality, and Sensitivity of the data.

The Custodian is the technical person who will implement the proper classification on objects in accordance with the Data Owner. The custodian DOES NOT decide what classification to apply, it is the Data Owner who will dictate to the Custodian what is the classification to apply.

NOTE:

The term Data Owner is also used within Discretionary Access Control (DAC). Within DAC it means the person who has created an object. For example, if I create a file on my system then I am the owner of the file and I can decide who else could get access to the file. It is left to my discretion. Within DAC access is granted based solely on the Identity of the subject, this is why sometimes DAC is referred to as Identity Based Access Control.

The other choices were not the best answer

Running regular backups is the responsibility of custodian. Audit the data users is the responsibility of the auditors

Periodically check the validity and accuracy of the data is not one of the data owner responsibility

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Page 14, Chapter 1: Security Management Practices.

NEW QUESTION 46

- (Topic 1)

In the context of Biometric authentication, what is a quick way to compare the accuracy of devices. In general, the device that have the lowest value would be the most accurate. Which of the following would be used to compare accuracy of devices?

- A. the CER is used.
- B. the FRR is used
- C. the FAR is used
- D. the FER is used

Answer: A

Explanation:

equal error rate or crossover error rate (EER or CER): the rate at which both accept and reject errors are equal. The value of the EER can be easily obtained from the ROC curve. The EER is a quick way to compare the accuracy of devices with different ROC curves. In general, the device with the lowest EER is most accurate.

In the context of Biometric Authentication almost all types of detection permit a system's sensitivity to be increased or decreased during an inspection process. If the system's sensitivity is increased, such as in an airport metal detector, the system becomes increasingly selective and has a higher False Reject Rate (FRR). Conversely, if the sensitivity is decreased, the False Acceptance Rate (FAR) will increase. Thus, to have a valid measure of the system performance, the CrossOver Error Rate (CER) is used.

The following are used as performance metrics for biometric systems:

false accept rate or false match rate (FAR or FMR): the probability that the system incorrectly matches the input pattern to a non-matching template in the database. It measures the percent of invalid inputs which are incorrectly accepted. In case of similarity scale, if the person is imposter in real, but the matching score is higher than the threshold, then he is treated as genuine that increase the FAR and hence performance also depends upon the selection of threshold value.

false reject rate or false non-match rate (FRR or FNMR): the probability that the system fails to detect a match between the input pattern and a matching template in the database. It measures the percent of valid inputs which are incorrectly rejected.

failure to enroll rate (FTE or FER): the rate at which attempts to create a template from an input is unsuccessful. This is most commonly caused by low quality inputs.

failure to capture rate (FTC): Within automatic systems, the probability that the system fails to detect a biometric input when presented correctly.

template capacity: the maximum number of sets of data which can be stored in the system. Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten

Domains of Computer Security, 2001, John Wiley & Sons, Page 37. and

Wikipedia at: <https://en.wikipedia.org/wiki/Biometrics>

NEW QUESTION 48

- (Topic 1)

What can be defined as a list of subjects along with their access rights that are authorized to access a specific object?

- A. A capability table
- B. An access control list
- C. An access control matrix
- D. A role-based matrix

Answer: B

Explanation:

"It [ACL] specifies a list of users [subjects] who are allowed access to each object" CBK, p. 188

A capability table is incorrect. "Capability tables are used to track, manage and apply controls based on the object and rights, or capabilities of a subject. For example, a table identifies the object, specifies access rights allowed for a subject, and permits access based on the user's possession of a capability (or ticket) for the object." CBK, pp. 191-192. The distinction that makes this an incorrect choice is that access is based on possession of a capability by the subject.

To put it another way, as noted in AIO3 on p. 169, "A capability table is different from an ACL because the subject is bound to the capability table, whereas the object is bound to the ACL."

An access control matrix is incorrect. The access control matrix is a way of describing the rules for an access control strategy. The matrix lists the users, groups and roles down the left side and the resources and functions across the top. The cells of the matrix can either indicate that access is allowed or indicate the type of access. CBK pp 317 - 318.

AIO3, p. 169 describes it as a table of subjects and objects specifying the access rights a certain subject possesses pertaining to specific objects.

In either case, the matrix is a way of analyzing the access control needed by a population of subjects to a population of objects. This access control can be applied using rules, ACL's, capability tables, etc.

A role-based matrix is incorrect. Again, a matrix of roles vs objects could be used as a tool for thinking about the access control to be applied to a set of objects.

The results of the analysis could then be implemented using RBAC.

References:

CBK, Domain 2: Access Control. AIO3, Chapter 4: Access Control

NEW QUESTION 51

- (Topic 1)

Identification and authentication are the keystones of most access control systems. Identification establishes:

- A. User accountability for the actions on the system.
- B. Top management accountability for the actions on the system.
- C. EDP department accountability for the actions of users on the system.
- D. Authentication for actions on the system

Answer: A

Explanation:

Identification and authentication are the keystones of most access control systems. Identification establishes user accountability for the actions on the system. The control environment can be established to log activity regarding the identification, authentication, authorization, and use of privileges on a system. This can be used to detect the occurrence of errors, the attempts to perform an unauthorized action, or to validate when provided credentials were exercised. The logging system as a detective device provides evidence of actions (both successful and unsuccessful) and tasks that were executed by authorized users.

Once a person has been identified through the user ID or a similar value, she must be authenticated, which means she must prove she is who she says she is.

Three general factors can be used for authentication: something a person knows, something a person has, and something a person is. They are also commonly called authentication by knowledge, authentication by ownership, and authentication by characteristic.

For a user to be able to access a resource, he first must prove he is who he claims to be, has the necessary credentials, and has been given the necessary rights or privileges to perform the actions he is requesting. Once these steps are completed successfully, the user can access and use network resources; however, it is necessary to track the user's activities and enforce accountability for his actions.

Identification describes a method of ensuring that a subject (user, program, or process) is the entity it claims to be. Identification can be provided with the use of a username or account number. To be properly authenticated, the subject is usually required to provide a second piece to the credential set. This piece could be a password, passphrase,

cryptographic key, personal identification number (PIN), anatomical attribute, or token.

These two credential items are compared to information that has been previously stored for this subject. If these credentials match the stored information, the subject is authenticated. But we are not done yet. Once the subject provides its credentials and is properly identified, the system it is trying to access needs to determine if this subject has been given the necessary rights and privileges to carry out the requested actions. The system will look at some type of access control matrix or compare security labels to verify that this subject may indeed access the requested resource and perform the actions it is attempting. If the system determines that the subject may access the resource, it authorizes the subject.

Although identification, authentication, authorization, and accountability have close and complementary definitions, each has distinct functions that fulfill a specific requirement in the process of access control. A user may be properly identified and authenticated to the network, but he may not have the authorization to access the files on the file server. On the other hand, a user may be authorized to access the files on the file server, but until she is properly identified and authenticated, those resources are out of reach.

Reference(s) used for this question:

Schneiter, Andrew (2013-04-15). Official (ISC)2 Guide to the CISSP CBK, Third Edition: Access Control ((ISC)2 Press) (Kindle Locations 889-892). Auerbach Publications. Kindle Edition.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 3875-3878). McGraw-Hill. Kindle Edition.

and

Harris, Shon (2012-10-25). CISSP All-in-One Exam Guide, 6th Edition (Kindle Locations 3833-3848). McGraw-Hill. Kindle Edition.

and

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

NEW QUESTION 53

- (Topic 1)

When submitting a passphrase for authentication, the passphrase is converted into ...

- A. a virtual password by the system
- B. a new passphrase by the system
- C. a new passphrase by the encryption technology
- D. a real password by the system which can be used forever

Answer: A

Explanation:

Passwords can be compromised and must be protected. In the ideal case, a password should only be used once. The changing of passwords can also fall between these two extremes.

Passwords can be required to change monthly, quarterly, or at other intervals, depending on the criticality of the information needing protection and the password's frequency of use.

Obviously, the more times a password is used, the more chance there is of it being compromised.

It is recommended to use a passphrase instead of a password. A passphrase is more resistant to attacks. The passphrase is converted into a virtual password by the system. Often time the passphrase will exceed the maximum length supported by the system and it must be truncated into a Virtual Password.

Reference(s) used for this question: <http://www.itl.nist.gov/fipspubs/fip112.htm>

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36 & 37.

NEW QUESTION 58

- (Topic 1)

Which of the following is not a security goal for remote access?

- A. Reliable authentication of users and systems
- B. Protection of confidential data
- C. Easy to manage access control to systems and network resources
- D. Automated login for remote users

Answer: D

Explanation:

An automated login function for remote users would imply a weak authentication, thus certainly not a security goal.

Source: TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition, volume 2, 2001, CRC Press, Chapter 5: An Introduction to Secure Remote Access (page 100).

NEW QUESTION 63

- (Topic 1)

What is called the use of technologies such as fingerprint, retina, and iris scans to authenticate the individuals requesting access to resources?

- A. Micrometrics
- B. Macrometrics
- C. Biometrics
- D. MicroBiometrics

Answer: C

Explanation:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 35.

NEW QUESTION 68

- (Topic 1)

Which of the following forms of authentication would most likely apply a digital signature algorithm to every bit of data that is sent from the claimant to the verifier?

- A. Dynamic authentication
- B. Continuous authentication
- C. Encrypted authentication
- D. Robust authentication

Answer: B

Explanation:

Continuous authentication is a type of authentication that provides protection against impostors who can see, alter, and insert information passed between the claimant and verifier even after the claimant/verifier authentication is complete. These are typically referred to as active attacks, since they assume that the imposter can actively influence the connection between claimant and verifier. One way to provide this form of authentication is to apply a digital signature algorithm to every bit of data that is sent from the claimant to the verifier. There are other combinations of cryptography that can provide this form of authentication but current strategies rely on applying some type of cryptography to every bit

of data sent. Otherwise, any unprotected bit would be suspect. Robust authentication relies on dynamic authentication data that changes with each authenticated session between a claimant and a verifier, but does not provide protection against active attacks. Encrypted authentication is a distracter.

Source: GUTTMAN, Barbara & BAGWILL, Robert, NIST Special Publication 800-xx, Internet Security Policy: A Technical Guide, Draft Version, May 25, 2000 (page 34).

NEW QUESTION 69

- (Topic 1)

Which of the following statements pertaining to access control is false?

- A. Users should only access data on a need-to-know basis.
- B. If access is not explicitly denied, it should be implicitly allowed.
- C. Access rights should be granted based on the level of trust a company has on a subject.
- D. Roles can be an efficient way to assign rights to a type of user who performs certain tasks.

Answer: B

Explanation:

Access control mechanisms should default to no access to provide the necessary level of security and ensure that no security holes go unnoticed. If access is not explicitly allowed, it should be implicitly denied.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, Chapter 4: Access Control (page 143).

NEW QUESTION 70

- (Topic 1)

A department manager has read access to the salaries of the employees in his/her department but not to the salaries of employees in other departments. A database security mechanism that enforces this policy would typically be said to provide which of the following?

- A. Content-dependent access control
- B. Context-dependent access control
- C. Least privileges access control
- D. Ownership-based access control

Answer: A

Explanation:

When access control is based on the content of an object, it is considered to be content dependent access control.

Content-dependent access control is based on the content itself. The following answers are incorrect:

context-dependent access control. Is incorrect because this type of control is based on what the context is, facts about the data rather than what the object contains.

least privileges access control. Is incorrect because this is based on the least amount of rights needed to perform their jobs and not based on what is contained in the database. ownership-based access control. Is incorrect because this is based on the owner of the data and and not based on what is contained in the database.

References:

OIG CBK Access Control (page 191)

NEW QUESTION 73

- (Topic 1)

In biometric identification systems, at the beginning, it was soon apparent that truly positive identification could only be based on :

- A. sex of a person
- B. physical attributes of a person
- C. age of a person
- D. voice of a person

Answer: B

Explanation:

Today implementation of fast, accurate reliable and user-acceptable biometric identification systems is already under way.

From: TIPTON, Harold F. & KRAUSE, MICKI, Information Security Management Handbook, 4th Edition, Volume 1, Page 7.

NEW QUESTION 75

- (Topic 1)

How would nonrepudiation be best classified as?

- A. A preventive control
- B. A logical control
- C. A corrective control
- D. A compensating control

Answer: A

Explanation:

Systems accountability depends on the ability to ensure that senders cannot deny sending information and that receivers cannot deny receiving it. Because the mechanisms implemented in nonrepudiation prevent the ability to successfully repudiate an action, it can be considered as a preventive control.

Source: STONEBURNER, Gary, NIST Special Publication 800-33: Underlying Technical Models for Information Technology Security, National Institute of Standards and Technology, December 2001, page 7.

NEW QUESTION 78

- (Topic 1)

Which of the following floors would be most appropriate to locate information processing facilities in a 6-stories building?

- A. Basement
- B. Ground floor
- C. Third floor
- D. Sixth floor

Answer: C

Explanation:

You data center should be located in the middle of the facility or the core of a building to provide protection from natural disasters or bombs and provide easier access to emergency crewmembers if necessary. By being at the core of the facility the external wall would act as a secondary layer of protection as well. Information processing facilities should not be located on the top floors of buildings in case of a fire or flooding coming from the roof. Many crimes and theft have also been conducted by simply cutting a large hole on the roof.

They should not be in the basement because of flooding where water has a natural tendency to flow down :-). Even a little amount of water would affect your operation

considering the quantity of electrical cabling sitting directly on the cement floor under under your raise floor.

The data center should not be located on the first floor due to the presence of the main entrance where people are coming in and out. You have a lot of high traffic areas such as the elevators, the loading docks, cafeteria, coffee shop, etc.. Really a bad location for a data center.

So it was easy to come up with the answer by using the process of elimination where the top, the bottom, and the basement are all bad choices. That left you with only one possible answer which is the third floor.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, 5th Edition, Page 425.

NEW QUESTION 82

- (Topic 1)

A central authority determines what subjects can have access to certain objects based on the organizational security policy is called:

- A. Mandatory Access Control
- B. Discretionary Access Control
- C. Non-Discretionary Access Control
- D. Rule-based Access control

Answer: C

Explanation:

A central authority determines what subjects can have access to certain objects based on the organizational security policy.

The key focal point of this question is the 'central authority' that determines access rights. Cecilia one of the quiz user has sent me feedback informing me that NIST defines MAC as:

"MAC Policy means that Access Control Policy Decisions are made by a CENTRAL

AUTHORITY. Which seems to indicate there could be two good answers to this question.

However if you read the NISTR document mentioned in the references below, it is also mentioned that: MAC is the most mentioned NDAC policy. So MAC is a form of NDAC policy.

Within the same document it is also mentioned: "In general, all access control policies other than DAC are grouped in the category of non- discretionary access control (NDAC). As the name implies, policies in this category have rules that are not established at the discretion of the user. Non-discretionary policies establish controls that cannot be changed by users, but only through administrative action."

Under NDAC you have two choices:

Rule Based Access control and Role Base Access Control

MAC is implemented using RULES which makes it fall under RBAC which is a form of NDAC. It is a subset of NDAC.

This question is representative of what you can expect on the real exam where you have more than once choice that seems to be right. However, you have to look closely if one of the choices would be higher level or if one of the choice falls under one of the other choice. In this case NDAC is a better choice because MAC is falling under NDAC through the use of Rule Based Access Control.

The following are incorrect answers: MANDATORY ACCESS CONTROL

In Mandatory Access Control the labels of the object and the clearance of the subject

determines access rights, not a central authority. Although a central authority (Better known as the Data Owner) assigns the label to the object, the system does the determination of access rights automatically by comparing the Object label with the Subject clearance. The subject clearance MUST dominate (be equal or higher) than the object being accessed.

The need for a MAC mechanism arises when the security policy of a system dictates that:

1. Protection decisions must not be decided by the object owner.

2. The system must enforce the protection decisions (i.e., the system enforces the security policy over the wishes or intentions of the object owner).

Usually a labeling mechanism and a set of interfaces are used to determine access based on the MAC policy; for example, a user who is running a process at the Secret classification should not be allowed to read a file with a label of Top Secret. This is known as the ??simple security rule,?? or ??no read up.??

Conversely, a user who is running a process with a label of Secret should not be allowed to write to a file with a label of Confidential. This rule is called the ??*-property?? (pronounced

??star property??) or ??no write down.?? The *-property is required to maintain system security in an automated environment.

DISCRETIONARY ACCESS CONTROL

In Discretionary Access Control the rights are determined by many different entities, each of the persons who have created files and they are the owner of that file, not one central authority.

DAC leaves a certain amount of access control to the discretion of the object's owner or anyone else who is authorized to control the object's access. For example, it is generally used to limit a user's access to a file; it is the owner of the file who controls other users' accesses to the file. Only those users specified by the owner may have some combination of read, write, execute, and other permissions to the file.

DAC policy tends to be very flexible and is widely used in the commercial and government sectors. However, DAC is known to be inherently weak for two reasons: First, granting read access is transitive; for example, when Ann grants Bob read access to a file, nothing stops Bob from copying the contents of Ann??s file to an object that Bob controls. Bob may now grant any other user access to the copy of Ann??s file without Ann??s knowledge.

Second, DAC policy is vulnerable to Trojan horse attacks. Because programs inherit the identity of the invoking user, Bob may, for example, write a program for Ann that, on the surface, performs some useful function, while at the same time destroys the contents of Ann??s files. When investigating the problem, the audit files would indicate that Ann destroyed her own files. Thus, formally, the drawbacks of DAC are as follows:

Discretionary Access Control (DAC) Information can be copied from one object to another; therefore, there is no real assurance on the flow of information in a system.

No restrictions apply to the usage of information when the user has received it.

The privileges for accessing objects are decided by the owner of the object, rather than through a system-wide policy that reflects the organization??s security requirements.

ACLs and owner/group/other access control mechanisms are by far the most common mechanism for implementing DAC policies. Other mechanisms, even though not designed with DAC in mind, may have the capabilities to implement a DAC policy.

RULE BASED ACCESS CONTROL

In Rule-based Access Control a central authority could in fact determine what subjects can

have access when assigning the rules for access. However, the rules actually determine the access and so this is not the most correct answer.

RuBAC (as opposed to RBAC, role-based access control) allow users to access systems and information based on pre determined and configured rules. It is important to note that there is no commonly understood definition or formally defined standard for rule-based access control as there is for DAC, MAC, and RBAC.

??Rule-based access?? is a generic term applied to systems that allow some form of organization-defined rules, and therefore rule-based access control encompasses a broad range of systems. RuBAC may in fact be combined with other models, particularly RBAC or DAC. A RuBAC system intercepts every access request and compares the rules with the rights of the user to make an access decision. Most of the rule-based access control relies on a security label system, which dynamically composes a set of rules defined by a security policy. Security labels are attached to all objects, including files, directories, and devices.

Sometime roles to subjects (based on their attributes) are assigned as well. RuBAC meets the business needs as well as the technical needs of controlling service access. It allows business rules to be applied to access control??for example, customers who have overdue balances may be denied service access. As a mechanism for MAC, rules of RuBAC cannot be changed by users. The rules can be established by any attributes of a system related to the users such as domain, host, protocol, network, or IP addresses. For example, suppose that a user wants to access an object in another network on the other side of a router. The router employs RuBAC with the rule composed by the network addresses, domain, and protocol to decide whether or not the user can be granted access. If employees change their roles within the organization, their existing authentication credentials remain in effect and do not need to be re configured. Using rules in conjunction with roles adds greater flexibility because rules can be applied to people as well as to devices. Rule-based access control can be combined with role-based access control, such that the role of a user is one of the attributes in rule setting. Some provisions of access control systems have rule- based policy engines in addition to a role-based policy engine and certain implemented dynamic policies [Des03]. For example, suppose that two of the primary types of software users are product engineers and quality engineers. Both groups usually have access to the same data, but they have different roles to perform in relation to the data and the application's function. In addition, individuals within each group have different job responsibilities that may be identified using several types of attributes such as developing programs and testing areas. Thus, the access decisions can be made in real time by a scripted policy that regulates the access between the groups of product engineers and quality engineers, and each individual within these groups. Rules can either replace or complement role-based access control. However, the creation of rules and security policies is also a complex process, so each organization will need to strike the appropriate balance.

References used for this question: <http://csrc.nist.gov/publications/nistir/7316/NISTIR-7316.pdf> and

AIO v3 p162-167 and OIG (2007) p.186-191

also

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 87

- (Topic 1)

This baseline sets certain thresholds for specific errors or mistakes allowed and the amount of these occurrences that can take place before it is considered suspicious?

- A. Checkpoint level
- B. Ceiling level
- C. Clipping level
- D. Threshold level

Answer: C

Explanation:

Organizations usually forgive a particular type, number, or pattern of violations, thus permitting a predetermined number of user errors before gathering this data for analysis. An organization attempting to track all violations, without sophisticated statistical computing ability, would be unable to manage the sheer quantity of such data. To make a violation listing effective, a clipping level must be established.

The clipping level establishes a baseline for violation activities that may be normal user errors. Only after this baseline is exceeded is a violation record produced.

This solution is particularly effective for small- to medium-sized installations. Organizations with large-scale computing facilities often track all violations and use statistical routines to cull out the minor infractions (e.g., forgetting a password or mistyping it several times).

If the number of violations being tracked becomes unmanageable, the first step in correcting the problems should be to analyze why the condition has occurred. Do users understand how they are to interact with the computer resource? Are the rules too difficult to follow? Violation tracking and analysis can be valuable tools in assisting an organization to develop thorough but useable controls. Once these are in place and records are produced that accurately reflect serious violations, tracking and analysis become the first line of defense. With this procedure, intrusions are discovered before major damage occurs and sometimes early enough to catch the perpetrator. In addition, business protection and preservation are strengthened.

The following answers are incorrect:

All of the other choices presented were simply detractors. The following reference(s) were used for this question:

Handbook of Information Security Management

NEW QUESTION 89

- (Topic 1)

In biometrics, "one-to-many" search against database of stored biometric images is done in:

- A. Authentication
- B. Identification
- C. Identities
- D. Identity-based access control

Answer: B

Explanation:

In biometrics, identification is a "one-to-many" search of an individual's characteristics from a database of stored images.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

NEW QUESTION 93

- (Topic 1)

Access control is the collection of mechanisms that permits managers of a system to exercise a directing or restraining influence over the behavior, use, and content of a system. It does not permit management to:

- A. specify what users can do
- B. specify which resources they can access
- C. specify how to restrain hackers
- D. specify what operations they can perform on a system.

Answer: C

Explanation:

Access control is the collection of mechanisms that permits managers of a system to exercise a directing or restraining influence over the behavior, use, and content of a system. It permits management to specify what users can do, which resources they can access, and what operations they can perform on a system. Specifying HOW to restrain hackers is not directly linked to access control.

Source: DUPUIS, Clement, Access Control Systems and Methodology, Version 1, May 2002, CISSP Open Study Group Study Guide for Domain 1, Page 12.

NEW QUESTION 95

- (Topic 1)

Almost all types of detection permit a system's sensitivity to be increased or decreased during an inspection process. If the system's sensitivity is increased, such as in a biometric authentication system, the system becomes increasingly selective and has the possibility of generating:

- A. Lower False Rejection Rate (FRR)
- B. Higher False Rejection Rate (FRR)
- C. Higher False Acceptance Rate (FAR)
- D. It will not affect either FAR or FRR

Answer: B

Explanation:

Almost all types of detection permit a system's sensitivity to be increased or decreased during an inspection process. If the system's sensitivity is increased, such as in a biometric authentication system, the system becomes increasingly selective and has a higher False Rejection Rate (FRR).

Conversely, if the sensitivity is decreased, the False Acceptance Rate (FRR) will increase. Thus, to have a valid measure of the system performance, the Cross Over Error (CER) rate is used. The Crossover Error Rate (CER) is the point at which the false rejection rates and the false acceptance rates are equal. The lower the value of the CER, the more accurate the system.

There are three categories of biometric accuracy measurement (all represented as percentages):

False Reject Rate (a Type I Error): When authorized users are falsely rejected as unidentified or unverified.

False Accept Rate (a Type II Error): When unauthorized persons or imposters are falsely accepted as authentic.

Crossover Error Rate (CER): The point at which the false rejection rates and the false acceptance rates are equal. The smaller the value of the CER, the more accurate the system.

NOTE:

Within the ISC2 book they make use of the term Accept or Acceptance and also Reject or Rejection when referring to the type of errors within biometrics. Below we make use of Acceptance and Rejection throughout the text for consistency. However, on the real exam you could see either of the terms.

Performance of biometrics

Different metrics can be used to rate the performance of a biometric factor, solution or application. The most common performance metrics are the False Acceptance Rate FAR and the False Rejection Rate FRR.

When using a biometric application for the first time the user needs to enroll to the system. The system requests fingerprints, a voice recording or another biometric factor from the

operator, this input is registered in the database as a template which is linked internally to a user ID. The next time when the user wants to authenticate or identify himself, the biometric input provided by the user is compared to the template(s) in the database by a matching algorithm which responds with acceptance (match) or rejection (no match).

FAR and FRR

The FAR or False Acceptance rate is the probability that the system incorrectly authorizes a non-authorized person, due to incorrectly matching the biometric input

with a valid template. The FAR is normally expressed as a percentage, following the FAR definition this is the percentage of invalid inputs which are incorrectly accepted.

The FRR or False Rejection Rate is the probability that the system incorrectly rejects access to an authorized person, due to failing to match the biometric input provided by the user with a stored template. The FRR is normally expressed as a percentage, following the FRR definition this is the percentage of valid inputs which are incorrectly rejected.

FAR and FRR are very much dependent on the biometric factor that is used and on the technical implementation of the biometric solution. Furthermore the FRR is strongly person dependent, a personal FRR can be determined for each individual.

Take this into account when determining the FRR of a biometric solution, one person is insufficient to establish an overall FRR for a solution. Also FRR might increase due to environmental conditions or incorrect use, for example when using dirty fingers on a fingerprint reader. Mostly the FRR lowers when a user gains more experience in how to use the biometric device or software.


FAR and FRR are key metrics for biometric solutions, some biometric devices or software even allow to tune them so that the system more quickly matches or rejects. Both FRR and FAR are important, but for most applications one of them is considered most important. Two examples to illustrate this:

When biometrics are used for logical or physical access control, the objective of the application is to disallow access to unauthorized individuals under all circumstances. It is clear that a very low FAR is needed for such an application, even if it comes at the price of a higher FRR.

When surveillance cameras are used to screen a crowd of people for missing children, the objective of the application is to identify any missing children that come up on the screen. When the identification of those children is automated using a face recognition software, this software has to be set up with a low FRR. As such a higher number of matches will be false positives, but these can be reviewed quickly by surveillance personnel.

False Acceptance Rate is also called False Match Rate, and False Rejection Rate is sometimes referred to as False Non-Match Rate.

crossover error rate

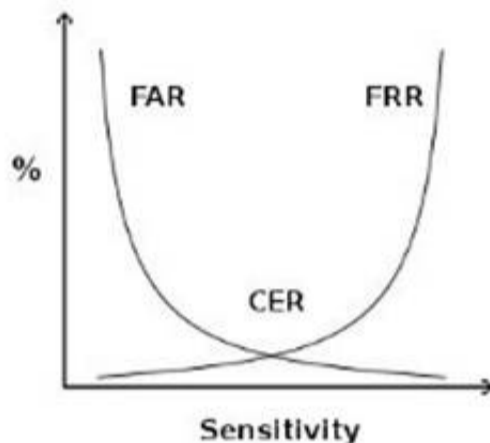

crossover error rate

Above see a graphical representation of FAR and FRR errors on a graph, indicating the CER

CER

The Crossover Error Rate or CER is illustrated on the graph above. It is the rate where both FAR and FRR are equal.

The matching algorithm in a biometric software or device uses a (configurable) threshold which determines how close to a template the input must be for it to be considered a match. This threshold value is in some cases referred to as sensitivity, it is marked on the X axis of the plot. When you reduce this threshold there will be more false acceptance errors (higher FAR) and less false rejection errors (lower FRR), a higher threshold will lead to lower FAR and higher FRR.

Speed

Most manufacturers of biometric devices and softwares can give clear numbers on the time it takes to enroll as well on the time for an individual to be authenticated or identified using their application. If speed is important then take your time to consider this, 5 seconds might seem a short time on paper or when testing a device but if hundreds of people will use the device multiple times a day the cumulative loss of time might be significant.

Reference(s) used for this question:

Hernandez CISSP, Steven (2012-12-21). Official (ISC)2 Guide to the CISSP CBK, Third Edition ((ISC)2 Press) (Kindle Locations 2723-2731). Auerbach Publications. Kindle Edition.

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37.

and

http://www.biometric-solutions.com/index.php?story=performance_biometrics

NEW QUESTION 96

- (Topic 1)

What are the components of an object's sensitivity label?

- A. A Classification Set and a single Compartment.
- B. A single classification and a single compartment.
- C. A Classification Set and user credentials.
- D. A single classification and a Compartment Set.

Answer: D

Explanation:

Both are the components of a sensitivity label. The following are incorrect:

A Classification Set and a single Compartment. Is incorrect because the nomenclature "Classification Set" is incorrect, there only one classification and it is not a "single compartment" but a Compartment Set.

A single classification and a single compartment. Is incorrect because while there only is one classification, it is not a "single compartment" but a Compartment Set.

A Classification Set and user credentials. Is incorrect because the nomenclature "Classification Set" is incorrect, there only one classification and it is not "user credential" but a Compartment Set. The user would have their own sensitivity label.

NEW QUESTION 100

- (Topic 1)

What is called the percentage at which the False Rejection Rate equals the False Acceptance Rate?

- A. False Rejection Rate (FRR) or Type I Error
- B. False Acceptance Rate (FAR) or Type II Error
- C. Crossover Error Rate (CER)
- D. Failure to enroll rate (FTE or FER)

Answer: C

Explanation:

The percentage at which the False Rejection Rate equals the False Acceptance Rate is called the Crossover Error Rate (CER). Another name for the CER is the Equal Error Rate (EER), any of the two terms could be used.

Equal error rate or crossover error rate (EER or CER)

It is the rate at which both accept and reject errors are equal. The EER is a quick way to compare the accuracy of devices with different ROC curves. In general, the device with the lowest EER is most accurate.

The other choices were all wrong answers:

The following are used as performance metrics for biometric systems:

false accept rate or false match rate (FAR or FMR): the probability that the system incorrectly matches the input pattern to a non-matching template in the database. It measures the percent of invalid inputs which are incorrectly accepted. This is when an impostor would be accepted by the system.

False reject rate or false non-match rate (FRR or FNMR): the probability that the system fails to detect a match between the input pattern and a matching template in the database. It measures the percent of valid inputs which are incorrectly rejected. This is when a valid company employee would be rejected by the system.

Failure to enroll rate (FTE or FER): the rate at which attempts to create a template from an input is unsuccessful. This is most commonly caused by low quality inputs.

Reference(s) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 38.

and <https://en.wikipedia.org/wiki/Biometrics>

NEW QUESTION 105

- (Topic 1)

Which of the following would be true about Static password tokens?

- A. The owner identity is authenticated by the token
- B. The owner will never be authenticated by the token.
- C. The owner will authenticate himself to the system.
- D. The token does not authenticates the token owner but the system.

Answer: A

Explanation:

Password Tokens

Tokens are electronic devices or cards that supply a user's password for them. A token system can be used to supply either a static or a dynamic password. There is a big difference between the static and dynamic systems, a static system will normally log a user in but a dynamic system the user will often have to log themselves in.

Static Password Tokens:

The owner identity is authenticated by the token. This is done by the person who issues the token to the owner (normally the employer). The owner of the token is now authenticated by "something you have". The token authenticates the identity of the owner to the information system. An example of this occurring is when an employee swipes his or her smart card over an electronic lock to gain access to a store room.

Synchronous Dynamic Password Tokens:

This system is a lot more complex then the static token password. The synchronous dynamic password tokens generate new passwords at certain time intervals that are synched with the main system. The password is generated on a small device similar to a pager or a calculator that can often be attached to the user's key ring. Each password is only valid for a certain time period, typing in the wrong password in the wrong time period will invalidate the authentication. The time factor can also be the systems downfall. If a clock on the system or the password token device becomes out of synch, a user can have troubles authenticating themselves to the system.

Asynchronous Dynamic Password Tokens:

The clock synching problem is eliminated with asynchronous dynamic password tokens. This system works on the same principal as the synchronous one but it does not have a time frame. A lot of big companies use this system especially for employee's who may work from home on the companies VPN (Virtual private Network).

Challenge Response Tokens:

This is an interesting system. A user will be sent special "challenge" strings at either random or timed intervals. The user inputs this challenge string into their token device and the device will respond by generating a challenge response. The user then types this response into the system and if it is correct they are authenticated.

Reference(s) used for this question: <http://www.informit.com/guides/content.aspx?g=security&seqNum=146>

and

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 37.

NEW QUESTION 108

- (Topic 1)

Which security model ensures that actions that take place at a higher security level do not affect actions that take place at a lower level?

- A. The Bell-LaPadula model
- B. The information flow model
- C. The noninterference model
- D. The Clark-Wilson model

Answer: C

Explanation:

The goal of a noninterference model is to strictly separate differing security levels to assure that higher-level actions do not determine what lower-level users can see. This is in contrast to other security models that control information flows between differing levels of users, By maintaining strict separation of security levels, a noninterference model minimizes leakages that might happen through a covert channel.

The model ensures that any actions that take place at a higher security level do not affect, or interfere with, actions that take place at a lower level.

It is not concerned with the flow of data, but rather with what a subject knows about the state of the system. So if an entity at a higher security level performs an action, it can not change the state for the entity at the lower level.

The model also addresses the inference attack that occurs when some one has access to some type of information and can infer(guess) something that he does not have the clearance level or authority to know.

The following are incorrect answers:

The Bell-LaPadula model is incorrect. The Bell-LaPadula model is concerned only with confidentiality and bases access control decisions on the classification of objects and the clearances of subjects.

The information flow model is incorrect. The information flow models have a similar framework to the Bell-LaPadula model and control how information may flow between objects based on security classes. Information will be allowed to flow only in accordance with the security policy.
The Clark-Wilson model is incorrect. The Clark-Wilson model is concerned with change control and assuring that all modifications to objects preserve integrity by means of well- formed transactions and usage of an access triple (subject - interface - object).

References:

CBK, pp 325 - 326

AI03, pp. 290 - 291

AI0v4 Security Architecture and Design (page 345)

AI0v5 Security Architecture and Design (pages 347 - 348)

https://en.wikibooks.org/wiki/Security_Architecture_and_Design/Security_Models#Noninterference_Models

NEW QUESTION 113

- (Topic 1)

What is called a sequence of characters that is usually longer than the allotted number for a password?

- A. passphrase
- B. cognitive phrase
- C. anticipated phrase
- D. Real phrase

Answer: A

Explanation:

A passphrase is a sequence of characters that is usually longer than the allotted number for a password.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, page 37.

NEW QUESTION 116

- (Topic 1)

What physical characteristic does a retinal scan biometric device measure?

- A. The amount of light reaching the retina
- B. The amount of light reflected by the retina
- C. The pattern of light receptors at the back of the eye
- D. The pattern of blood vessels at the back of the eye

Answer: D

Explanation:

The retina, a thin nerve (1/50th of an inch) on the back of the eye, is the part of the eye which senses light and transmits impulses through the optic nerve to the brain - the equivalent of film in a camera. Blood vessels used for biometric identification are located along the neural retina, the outermost of retina's four cell layers.

The following answers are incorrect:

The amount of light reaching the retina The amount of light reaching the retina is not used in the biometric scan of the retina.

The amount of light reflected by the retina The amount of light reflected by the retina is not used in the biometric scan of the retina.

The pattern of light receptors at the back of the eye This is a distractor The following reference(s) were/was used to create this question: Reference: Retina Scan Technology.

ISC2 Official Guide to the CBK, 2007 (Page 161)

NEW QUESTION 120

- (Topic 1)

Which of the following can be defined as a framework that supports multiple, optional authentication mechanisms for PPP, including cleartext passwords, challenge-response, and arbitrary dialog sequences?

- A. Extensible Authentication Protocol
- B. Challenge Handshake Authentication Protocol
- C. Remote Authentication Dial-In User Service
- D. Multilevel Authentication Protocol.

Answer: A

Explanation:

RFC 2828 (Internet Security Glossary) defines the Extensible Authentication Protocol as a framework that supports multiple, optional authentication mechanisms for PPP, including cleartext passwords, challenge-response, and arbitrary dialog sequences. It is intended for use primarily by a host or router that connects to a PPP network server via switched circuits or dial-up lines. The Remote Authentication Dial-In User Service (RADIUS) is defined as an Internet protocol for carrying dial-in user's authentication information and configuration information between a shared, centralized authentication server and a network access server that needs to authenticate the users of its network access ports. The other option is a distractor.

Source: SHIREY, Robert W., RFC2828: Internet Security Glossary, may 2000.

NEW QUESTION 121

- (Topic 1)

Examples of types of physical access controls include all EXCEPT which of the following?

- A. badges
- B. locks
- C. guards
- D. passwords

Answer: D

Explanation:

Passwords are considered a Preventive/Technical (logical) control. The following answers are incorrect:
badges Badges are a physical control used to identify an individual. A badge can include a smart device which can be used for authentication and thus a Technical control, but the actual badge itself is primarily a physical control.
locks Locks are a Preventative Physical control and has no Technical association. guards Guards are a Preventative Physical control and has no Technical association.
The following reference(s) were/was used to create this question:
Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 35).

NEW QUESTION 126

- (Topic 1)

Which of the following is NOT part of the Kerberos authentication protocol?

- A. Symmetric key cryptography
- B. Authentication service (AS)
- C. Principals
- D. Public Key

Answer: D

Explanation:

There is no such component within kerberos environment. Kerberos uses only symmetric encryption and does not make use of any public key component.
The other answers are incorrect because :
Symmetric key cryptography is a part of Kerberos as the KDC holds all the users' and services' secret keys.
Authentication service (AS) : KDC (Key Distribution Center) provides an authentication service
Principals : Key Distribution Center provides services to principals , which can be users , applications or network services.
References: Shon Harris , AIO v3 , Chapter - 4: Access Control , Pages : 152-155.

NEW QUESTION 129

- (Topic 1)

Because all the secret keys are held and authentication is performed on the Kerberos TGS and the authentication servers, these servers are vulnerable to:

- A. neither physical attacks nor attacks from malicious code.
- B. physical attacks only
- C. both physical attacks and attacks from malicious code.
- D. physical attacks but not attacks from malicious code.

Answer: C

Explanation:

Since all the secret keys are held and authentication is performed on the Kerberos TGS and the authentication servers, these servers are vulnerable to both physical attacks and attacks from malicious code.
Because a client's password is used in the initiation of the Kerberos request for the service protocol, password guessing can be used to impersonate a client.
Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 42.

NEW QUESTION 131

- (Topic 1)

Which of the following is true of two-factor authentication?

- A. It uses the RSA public-key signature based on integers with large prime factors.
- B. It requires two measurements of hand geometry.
- C. It does not use single sign-on technology.
- D. It relies on two independent proofs of identity.

Answer: D

Explanation:

The Answer It relies on two independent proofs of identity. Two-factor authentication refers to using two independent proofs of identity, such as something the user has (e.g. a token card) and something the user knows (a password). Two-factor authentication may be used with single sign-on.
The following answers are incorrect: It requires two measurements of hand geometry. Measuring hand geometry twice does not yield two independent proofs.
It uses the RSA public-key signature based on integers with large prime factors. RSA encryption uses integers with exactly two prime factors, but the term "two-factor authentication" is not used in that context.
It does not use single sign-on technology. This is a detractor. The following reference(s) were/was used to create this question:
Shon Harris AIO v.3 p.129
ISC2 OIG, 2007 p. 126

NEW QUESTION 133

- (Topic 1)

Kerberos is vulnerable to replay in which of the following circumstances?

- A. When a private key is compromised within an allotted time window.
- B. When a public key is compromised within an allotted time window.
- C. When a ticket is compromised within an allotted time window.
- D. When the KSD is compromised within an allotted time window.

Answer: C

Explanation:

Replay can be accomplished on Kerberos if the compromised tickets are used within an allotted time window.

The security depends on careful implementation: enforcing limited lifetimes for authentication credentials minimizes the threat of replayed credentials, the KDC must be physically secured, and it should be hardened, not permitting any non-kerberos activities.

Reference:

Official ISC2 Guide to the CISSP, 2007 Edition, page 184 also see:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 42.

NEW QUESTION 138

- (Topic 1)

What mechanism automatically causes an alarm originating in a data center to be transmitted over the local municipal fire or police alarm circuits for relaying to both the local police/fire station and the appropriate headquarters?

- A. Central station alarm
- B. Proprietary alarm
- C. A remote station alarm
- D. An auxiliary station alarm

Answer: D

Explanation:

Auxiliary station alarms automatically cause an alarm originating in a data center to be transmitted over the local municipal fire or police alarm circuits for relaying to both the local police/fire station and the appropriate headquarters. They are usually Municipal Fire Alarm Boxes are installed at your business or building, they are wired directly into the fire station.

Central station alarms are operated by private security organizations. It is very similar to a proprietary alarm system (see below). However, the biggest difference is the monitoring and receiving of alarm is done off site at a central location manned by non staff members. It is a third party.

Proprietary alarms are similar to central stations alarms except that monitoring is performed directly on the protected property. This type of alarm is usually use to protect large industrials or commercial buildings. Each of the buildings in the same vicinity has their own alarm system, they are all wired together at a central location within one of the building acting as a common receiving point. This point is usually far away from the other building so it is not under the same danger. It is usually man 24 hours a day by a trained team who knows how to react under different conditions.

A remote station alarm is a direct connection between the signal-initiating device at the protected property and the signal-receiving device located at a remote station, such as the fire station or usually a monitoring service. This is the most popular type of implementation and the owner of the premise must pay a monthly monitoring fee. This is what most people use in their home where they get a company like ADT to receive the alarms on their behalf.

A remote system differs from an auxiliary system in that it does not use the municipal fire or police alarm circuits.

Reference(s) used for this question:

ANDRESS, Mandy, Exam Cram CISSP, Coriolis, 2001, Chapter 11: Physical Security (page 211).

and

Great presentation J.T.A. Stone on SlideShare

NEW QUESTION 140

- (Topic 1)

Which of the following division is defined in the TCSEC (Orange Book) as minimal protection?

- A. Division D
- B. Division C
- C. Division B
- D. Division A

Answer: A

Explanation:

The criteria are divided into four divisions: D, C, B, and A ordered in a hierarchical manner with the highest division (A) being reserved for systems providing the most comprehensive security.

Each division represents a major improvement in the overall confidence one can place in the system for the protection of sensitive information.

Within divisions C and B there are a number of subdivisions known as classes. The classes are also ordered in a hierarchical manner with systems representative of division C and lower classes of division B being characterized by the set of computer security mechanisms that they possess.

Assurance of correct and complete design and implementation for these systems is gained mostly through testing of the security- relevant portions of the system.

The security-relevant portions of a system are referred to throughout this document as the Trusted Computing Base (TCB).

Systems representative of higher classes in division B and division A derive their security attributes more from their design and implementation structure.

Increased assurance that the required features are operative, correct, and tamperproof under all circumstances is gained through progressively more rigorous analysis during the design process.

TCSEC provides a classification system that is divided into hierarchical divisions of assurance levels:

Division D - minimal security Division C - discretionary protection Division B - mandatory protection Division A - verified protection

Reference: page 358 AIO V.5 Shon Harris

also

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, page 197.

Also:

THE source for all TCSEC "level" questions: <http://csrc.nist.gov/publications/secpubs/rainbow/std001.txt>

NEW QUESTION 141

- (Topic 1)

In non-discretionary access control using Role Based Access Control (RBAC), a central authority determines what subjects can have access to certain objects based on the organizational security policy. The access controls may be based on:

- A. The societies role in the organization
- B. The individual's role in the organization
- C. The group-dynamics as they relate to the individual's role in the organization
- D. The group-dynamics as they relate to the master-slave role in the organization

Answer: B

Explanation:

In Non-Discretionary Access Control, when Role Based Access Control is being used, a central authority determines what subjects can have access to certain objects based on the organizational security policy. The access controls may be based on the individual's role in the organization.

Reference(S) used for this question:

KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 33.

NEW QUESTION 142

- (Topic 1)

How can an individual/person best be identified or authenticated to prevent local masquerading attacks?

- A. UserId and password
- B. Smart card and PIN code
- C. Two-factor authentication
- D. Biometrics

Answer: D

Explanation:

The only way to be truly positive in authenticating identity for access is to base the authentication on the physical attributes of the persons themselves (i.e., biometric

identification). Physical attributes cannot be shared, borrowed, or duplicated. They ensure that you do identify the person, however they are not perfect and they would have to be supplemented by another factor.

Some people are getting thrown off by the term Masquerade. In general, a masquerade is a disguise. In terms of communications security issues, a masquerade is a type of attack where the attacker pretends to be an authorized user of a system in order to gain access to it or to gain greater privileges than they are authorized for. A masquerade may be attempted through the use of stolen logon IDs and passwords, through finding security gaps in programs, or through bypassing the authentication mechanism. Spoofing is another term used to describe this type of attack as well.

A UserId only provides for identification.

A password is a weak authentication mechanism since passwords can be disclosed, shared, written down, and more.

A smart card can be stolen and its corresponding PIN code can be guessed by an intruder. A smartcard can be borrowed by a friend of yours and you would have no clue as to who is really logging in using that smart card.

Any form of two-factor authentication not involving biometrics cannot be as reliable as a biometric system to identify the person.

Biometric identifying verification systems control people. If the person with the correct hand, eye, face, signature, or voice is not present, the identification and verification cannot take place and the desired action (i.e., portal passage, data, or resource access) does not occur.

As has been demonstrated many times, adversaries and criminals obtain and successfully use access cards, even those that require the addition of a PIN. This is because these systems control only pieces of plastic (and sometimes information), rather than people. Real asset and resource protection can only be accomplished by people, not cards and information, because unauthorized persons can (and do) obtain the cards and information.

Further, life-cycle costs are significantly reduced because no card or PIN administration system or personnel are required. The authorized person does not lose physical characteristics (i.e., hands, face, eyes, signature, or voice), but cards and PINs are continuously lost, stolen, or forgotten. This is why card access systems require systems and people to administer, control, record, and issue (new) cards and PINs. Moreover, the cards are an expensive and recurring cost.

NOTE FROM CLEMENT:

This question has been generating lots of interest. The keyword in the question is: Individual (the person) and also the authenticated portion as well.

I totally agree with you that Two Factors or Strong Authentication would be the strongest means of authentication. However the question is not asking what is the strongest mean of authentication, it is asking what is the best way to identify the user (individual) behind the technology. When answering questions do not make assumptions to facts not presented in the question or answers.

Nothing can beat Biometrics in such case. You cannot lend your fingerprint and pin to someone else, you cannot borrow one of my eye balls to defeat the Iris or Retina scan. This is why it is the best method to authenticate the user.

I think the reference is playing with semantics and that makes it a bit confusing. I have improved the question to make it a lot clearer and I have also improve the explanations attached with the question.

The reference mentioned above refers to authenticating the identity for access. So the distinction is being made that there is identity and there is authentication. In the case of physical security the enrollment process is where the identity of the user would be validated and then the biometrics features provided by the user would authenticate the user on a one to one matching basis (for authentication) with the reference contained in the database of biometrics templates. In the case of system access, the user might have to provide a username, a pin, a passphrase, a smart card, and then provide his biometric attributes.

Biometric can also be used for Identification purpose where you do a one to many match. You take a facial scan of someone within an airport and you attempt to match it with a large database of known criminal and terrorists. This is how you could use biometric for Identification.

There are always THREE means of authentication, they are: Something you know (Type 1)

Something you have (Type 2)

Something you are (Type 3)

Reference(s) used for this question:

TIPTON, Harold F. & KRAUSE, Micki, Information Security Management Handbook, 4th edition (volume 1) , 2000, CRC Press, Chapter 1, Biometric Identification (page 7).

and

Search Security at <http://searchsecurity.techtarget.com/definition/masquerade>

NEW QUESTION 144

- (Topic 1)

Examples of types of physical access controls include all EXCEPT which of the following?

- A. badges
- B. locks
- C. guards
- D. passwords

Answer: D

Explanation:

Passwords are considered a Preventive/Technical (logical) control. The following answers are incorrect:

badges Badges are a physical control used to identify an individual. A badge can include a smart device which can be used for authentication and thus a Technical control, but the actual badge itself is primarily a physical control.

locks Locks are a Preventative Physical control and has no Technical association. guards Guards are a Preventative Physical control and has no Technical

association.

The following reference(s) were/was used to create this question:

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 2: Access control systems (page 35).

NEW QUESTION 147

- (Topic 1)

Which of the following access control models introduces user security clearance and data classification?

- A. Role-based access control
- B. Discretionary access control
- C. Non-discretionary access control
- D. Mandatory access control

Answer: D

Explanation:

The mandatory access control model is based on a security label system. Users are given a security clearance and data is classified. The classification is stored in the security labels of the resources. Classification labels specify the level of trust a user must have to access a certain file.

Source: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw- Hill/Osborne, 2002, Chapter 4: Access Control (Page 154).

NEW QUESTION 150

- (Topic 1)

What Orange Book security rating is reserved for systems that have been evaluated but fail to meet the criteria and requirements of the higher divisions?

- A. A
- B. D
- C. E
- D. F

Answer: B

Explanation:

D or "minimal protection" is reserved for systems that were evaluated under the TCSEC but did not meet the requirements for a higher trust level.

A is incorrect. A or "Verified Protection" is the highest trust level under the TCSEC. E is incorrect. The trust levels are A - D so "E" is not a valid trust level.

F is incorrect. The trust levels are A - D so "F" is not a valid trust level.

CBK, pp. 329 - 330

AIO3, pp. 302 - 306

NEW QUESTION 151

- (Topic 1)

Which of the following is NOT an advantage that TACACS+ has over TACACS?

- A. Event logging
- B. Use of two-factor password authentication
- C. User has the ability to change his password
- D. Ability for security tokens to be resynchronized

Answer: A

Explanation:

Although TACACS+ provides better audit trails, event logging is a service that is provided with TACACS.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 3: Telecommunications and Network Security (page 121).

NEW QUESTION 156

- (Topic 1)

What is Kerberos?

- A. A three-headed dog from the egyptian mythology.
- B. A trusted third-party authentication protocol.
- C. A security model.
- D. A remote authentication dial in user server.

Answer: B

Explanation:

Is correct because that is exactly what Kerberos is. The following answers are incorrect:

A three-headed dog from Egyptian mythology. Is incorrect because we are dealing with Information Security and not the Egyptian mythology but the Greek Mythology.

A security model. Is incorrect because Kerberos is an authentication protocol and not just a security model.

A remote authentication dial in user server. Is incorrect because Kerberos is not a remote authentication dial in user server that would be called RADIUS.

NEW QUESTION 157

- (Topic 1)

Which of the following models does NOT include data integrity or conflict of interest?

- A. Biba

- B. Clark-Wilson
- C. Bell-LaPadula
- D. Brewer-Nash

Answer: C

Explanation:

Bell LaPadula model (Bell 1975): The granularity of objects and subjects is not predefined, but the model prescribes simple access rights. Based on simple access restrictions the Bell LaPadula model enforces a discretionary access control policy enhanced with mandatory rules. Applications with rigid confidentiality requirements and without strong integrity requirements may properly be modeled.

These simple rights combined with the mandatory rules of the policy considerably restrict the spectrum of applications which can be appropriately modeled.

Source: TIPTON, Hal, (ISC)2, Introduction to the CISSP Exam presentation.

Also check:

Proceedings of the IFIP TC11 12th International Conference on Information Security, Samos (Greece), May 1996, On Security Models.

NEW QUESTION 160

- (Topic 1)

Which access control model is best suited in an environment where a high security level is required and where it is desired that only the administrator grants access control?

- A. DAC
- B. MAC
- C. Access control matrix
- D. TACACS

Answer: B

Explanation:

MAC provides high security by regulating access based on the clearance of individual users and sensitivity labels for each object. Clearance levels and sensitivity levels cannot be modified by individual users -- for example, user Joe (SECRET clearance) cannot reclassify the "Presidential Doughnut Recipe" from "SECRET" to "CONFIDENTIAL" so that his friend Jane (CONFIDENTIAL clearance) can read it. The administrator is ultimately responsible for configuring this protection in accordance with security policy and directives from the Data Owner.

DAC is incorrect. In DAC, the data owner is responsible for controlling access to the object. Access control matrix is incorrect. The access control matrix is a way of thinking about the

access control needed by a population of subjects to a population of objects. This access

control can be applied using rules, ACL's, capability tables, etc.

TACACS is incorrect. TACACS is a tool for performing user authentication. References:

CBK, p. 187, Domain 2: Access Control. AIO3, Chapter 4, Access Control.

NEW QUESTION 163

- (Topic 1)

What does the simple security (ss) property mean in the Bell-LaPadula model?

- A. No read up
- B. No write down
- C. No read down
- D. No write up

Answer: A

Explanation:

The ss (simple security) property of the Bell-LaPadula access control model states that reading of information by a subject at a lower sensitivity level from an object at a higher sensitivity level is not permitted (no read up).

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 5: Security Architectures and Models (page 202).

NEW QUESTION 167

- (Topic 1)

Technical controls such as encryption and access control can be built into the operating system, be software applications, or can be supplemental hardware/software units. Such controls, also known as logical controls, represent which pairing?

- A. Preventive/Administrative Pairing
- B. Preventive/Technical Pairing
- C. Preventive/Physical Pairing
- D. Detective/Technical Pairing

Answer: B

Explanation:

Preventive/Technical controls are also known as logical controls and can be built into the operating system, be software applications, or can be supplemental hardware/software units.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 34.

NEW QUESTION 168

- (Topic 1)

Which type of attack involves impersonating a user or a system?

- A. Smurfing attack
- B. Spoofing attack

- C. Spamming attack
- D. Sniffing attack

Answer: B

Explanation:

A spoofing attack is when an attempt is made to gain access to a computer system by posing as an authorized user or system. Spamming refers to sending out or posting junk advertising and unsolicited mail. A smurf attack is a type of denial-of-service attack using PING and a spoofed address. Sniffing refers to observing packets passing on a network.

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the

Ten Domains of Computer Security, John Wiley & Sons, 2001, Chapter 3: Telecommunications and Network Security (page 77).

NEW QUESTION 171

- (Topic 1)

Which one of the following factors is NOT one on which Authentication is based?

- A. Type 1. Something you know, such as a PIN or password
- B. Type 2. Something you have, such as an ATM card or smart card
- C. Type 3. Something you are (based upon one or more intrinsic physical or behavioral traits), such as a fingerprint or retina scan
- D. Type 4. Something you are, such as a system administrator or security administrator

Answer: D

Explanation:

Authentication is based on the following three factor types:

Type 1. Something you know, such as a PIN or password

Type 2. Something you have, such as an ATM card or smart card

Type 3. Something you are (Unique physical characteristic), such as a fingerprint or retina scan

Source: KRUTZ, Ronald L. & VINES, Russel D., The CISSP Prep Guide: Mastering the Ten Domains of Computer Security, 2001, John Wiley & Sons, Page 36.

Also: HARRIS, Shon, All-In-One CISSP Certification Exam Guide, McGraw-Hill/Osborne, 2002, chapter 4: Access Control (pages 132-133).

NEW QUESTION 173

- (Topic 1)

What kind of certificate is used to validate a user identity?

- A. Public key certificate
- B. Attribute certificate
- C. Root certificate
- D. Code signing certificate

Answer: A

Explanation:

In cryptography, a public key certificate (or identity certificate) is an electronic document which incorporates a digital signature to bind together a public key with an identity ?? information such as the name of a person or an organization, their address, and so forth. The certificate can be used to verify that a public key belongs to an individual.

In a typical public key infrastructure (PKI) scheme, the signature will be of a certificate authority (CA). In a web of trust scheme, the signature is of either the user (a self-signed certificate) or other users ("endorsements"). In either case, the signatures on a certificate are attestations by the certificate signer that the identity information and the public key belong together.

In computer security, an authorization certificate (also known as an attribute certificate) is a digital document that describes a written permission from the issuer to use a service or a resource that the issuer controls or has access to use. The permission can be delegated.

Some people constantly confuse PKCs and ACs. An analogy may make the distinction clear. A PKC can be considered to be like a passport: it identifies the holder, tends to last for a long time, and should not be trivial to obtain. An AC is more like an entry visa: it is typically issued by a different authority and does not last for as long a time. As acquiring an entry visa typically requires presenting a passport, getting a visa can be a simpler process.

A real life example of this can be found in the mobile software deployments by large service providers and are typically applied to platforms such as Microsoft Smartphone (and related), Symbian OS, J2ME, and others.

In each of these systems a mobile communications service provider may customize the mobile terminal client distribution (ie. the mobile phone operating system or application environment) to include one or more root certificates each associated with a set of capabilities or permissions such as "update firmware", "access address book", "use radio interface", and the most basic one, "install and execute". When a developer wishes to enable distribution and execution in one of these controlled environments they must acquire a certificate from an appropriate CA, typically a large commercial CA, and in the process they usually have their identity verified using out-of-band mechanisms such as a combination of phone call, validation of their legal entity through government and commercial databases, etc., similar to the high assurance SSL certificate vetting process, though often there are additional specific requirements imposed on would-be developers/publishers. Once the identity has been validated they are issued an identity certificate they can use to sign their software; generally the software signed by the developer or publisher's identity certificate is not distributed but rather it is submitted to processor to possibly test or profile the content before generating an authorization certificate which is unique to the particular software release. That certificate is then used with an ephemeral asymmetric key-pair to sign the software as the last step of preparation for distribution. There are many advantages to separating the identity and authorization certificates especially relating to risk mitigation of new content being accepted into the system and key management as well as recovery from errant software which can be used as attack vectors.

References:

HARRIS, Shon, All-In-One CISSP Certification Exam Guide, 2001, McGraw-Hill/Osborne, page 540.

http://en.wikipedia.org/wiki/Attribute_certificate http://en.wikipedia.org/wiki/Public_key_certificate

NEW QUESTION 176

- (Topic 1)

Which of the following would be an example of the best password?

- A. golf001
- B. Elizabeth
- C. T1me4g0lF
- D. password

Answer: C

Explanation:

The best passwords are those that are both easy to remember and hard to crack using a dictionary attack. The best way to create passwords that fulfil both criteria is to use two small unrelated words or phonemes, ideally with upper and lower case characters, a special character, and/or a number. Shouldn't be used: common names, DOB, spouse, phone numbers, words found in dictionaries or system defaults.

Source: ROTHKE, Ben, CISSP CBK Review presentation on domain 1.

NEW QUESTION 180

- (Topic 1)

Access Control techniques do not include which of the following choices?

- A. Relevant Access Controls
- B. Discretionary Access Control
- C. Mandatory Access Control
- D. Lattice Based Access Control

Answer: A

Explanation:

Access Control Techniques Discretionary Access Control

Mandatory Access Control Lattice Based Access Control Rule-Based Access Control Role-Based Access Control

Source: DUPUIS, Clement, Access Control Systems and Methodology, Version 1, May 2002, CISSP Open Study Group Study Guide for Domain 1, Page 13.

NEW QUESTION 183

- (Topic 1)

Which of the following does not apply to system-generated passwords?

- A. Passwords are harder to remember for users.
- B. If the password-generating algorithm gets to be known, the entire system is in jeopardy.
- C. Passwords are more vulnerable to brute force and dictionary attacks.
- D. Passwords are harder to guess for attackers.

Answer: C

Explanation:

Users tend to choose easier to remember passwords. System-generated

passwords can provide stronger, harder to guess passwords. Since they are based on rules provided by the administrator, they can include combinations of uppercase/lowercase letters, numbers and special characters, making them less vulnerable to brute force and dictionary attacks. One danger is that they are also harder to remember for users, who will tend to write them down, making them more vulnerable to anyone having access to the user's desk. Another danger with system-generated passwords is that if the password- generating algorithm gets to be known, the entire system is in jeopardy.

Source: RUSSEL, Deborah & GANGEMI, G.T. Sr., Computer Security Basics, O'Reilly, July 1992 (page 64).

NEW QUESTION 188

- (Topic 1)

Which of the following logical access exposures INVOLVES CHANGING data before, or as it is entered into the computer?

- A. Data diddling
- B. Salami techniques
- C. Trojan horses
- D. Viruses

Answer: A

Explanation:

It involves changing data before , or as it is entered into the computer or in

other words , it refers to the alteration of the existing data. The other answers are incorrect because :

Salami techniques : A salami attack is the one in which an attacker commits several small crimes with the hope that the overall larger crime will go unnoticed.

Trojan horses: A Trojan Horse is a program that is disguised as another program. Viruses:A Virus is a small application , or a string of code , that infects applications.

Reference: Shon Harris , AIO v3

Chapter - 11: Application and System Development, Page : 875-880 Chapter - 10: Law, Investigation and Ethics , Page : 758-759

NEW QUESTION 193

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

SSCP Practice Exam Features:

- * SSCP Questions and Answers Updated Frequently
- * SSCP Practice Questions Verified by Expert Senior Certified Staff
- * SSCP Most Realistic Questions that Guarantee you a Pass on Your First Try
- * SSCP Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The SSCP Practice Test Here](#)