

Exam Questions JN0-105

Junos - Associate (JNCIA-Junos) 2024 Exam

<https://www.2passeasy.com/dumps/JN0-105/>



NEW QUESTION 1

Which two functions are performed by the PFE? (Choose two.)

- A. It implements firewall filters.
- B. It selects active routes.
- C. It forwards transit traffic.
- D. It maintains the routing table.

Answer: AC

Explanation:

The Packet Forwarding Engine (PFE) in Junos OS performs several key functions, including implementing firewall filters (A) and forwarding transit traffic (C). The PFE applies firewall filter rules to incoming and outgoing traffic and is responsible for the high-speed forwarding of packets based on the information in the forwarding table.

NEW QUESTION 2

You received a new Junos device and are configuring the system-related settings. You must configure this device for the current date and time on the US West coast. You have set the time zone to America/Los_Angeles. however the time and date did not change. In this scenario, which two additional actions would satisfy this requirement? (Choose two.)

- A. Set the date and time setting manually.
- B. Configure an NTP server.
- C. Configure a DNS server.
- D. Reboot the device.

Answer: AB

Explanation:

When configuring the system-related settings for the current date and time on a Junos device, especially for a specific time zone like America/Los_Angeles, and the time does not automatically adjust, two effective actions can be taken. Firstly, setting the date and time manually allows for immediate correction of the system clock. This can be done via the CLI with the appropriate set date and time command. Secondly, configuring the device to use an NTP server can provide ongoing synchronization with an accurate time source, ensuring that the device maintains the correct time and date automatically in the future, even in the case of restarts or minor drifts in the internal clock.

NEW QUESTION 3

Which Junos OS component is responsible for maintaining the forwarding table?

- A. Routing Engine
- B. chassis control daemon
- C. Packet Forwarding Engine
- D. management daemon

Answer: C

Explanation:

The Packet Forwarding Engine (PFE) in Junos OS is responsible for maintaining the forwarding table. The PFE processes incoming packets, performs route lookups in the forwarding table, and forwards packets based on this information, offloading these tasks from the Routing Engine to ensure efficient packet forwarding.

NEW QUESTION 4

Which statement is correct when multiple users are configuring a Junos device using the configure private command?

- A. A commit by any user will commit changes made by all active users.
- B. A commit will not succeed until there is only a single user in configuration mode.
- C. Each user gets their own candidate configuration.
- D. Each user shares the same candidate configuration.

Answer: C

Explanation:

When multiple users are configuring a Junos device using the "configure private" command, each user gets their own candidate configuration (C). This allows for isolated configuration sessions, where changes made by one user do not impact or interfere with the changes made by another user in their private session.

NEW QUESTION 5

You are asked to view the real-time usage statistics for the busiest interfaces on a device running Junos OS. Which command will achieve this task?

- A. monitor traffic absolute-sequence
- B. monitor interface traffic
- C. monitor traffic
- D. show interfaces extensive

Answer: B

Explanation:

To view real-time usage statistics for the busiest interfaces on a device running Junos OS, the correct command is B, "monitor interface traffic." This command

provides a dynamic, real-time view of the traffic flowing through the interfaces, allowing administrators to quickly identify and monitor the busiest interfaces on the device.

NEW QUESTION 6

What information does the forwarding table require so that the device forwards traffic? (Choose three.)

- A. OSPF metric value
- B. next hop IP address
- C. BGP local preference value
- D. outgoing interface name
- E. next hop MAC address

Answer: BDE

Explanation:

The forwarding table in a network device requires specific information to efficiently forward traffic toward its destination. This includes the next hop IP address, which indicates the next router or device in the path to the destination. The outgoing interface name identifies the physical or logical interface through which the packet should be sent to reach the next hop. Lastly, the next hop MAC address is crucial for Layer 2 forwarding decisions, allowing the device to encapsulate the IP packet in a frame that can be understood by Ethernet or other Layer 2 protocols. OSPF metric values and BGP local preference values are used in the routing decision process to select the best path and populate the forwarding table but are not directly used by the forwarding table to forward traffic.

NEW QUESTION 7

What are two advantages of using the Junos OS? (Choose two.)

- A. It enables you to roll back to a previous configuration.
- B. It pushes your configuration changes "live" immediately.
- C. It is modular.
- D. It supports up to a maximum of two previous configurations.

Answer: AC

Explanation:

One of the key advantages of Junos OS is its ability to roll back to previous configurations. This feature allows administrators to revert to an earlier configuration state, which is invaluable for quickly recovering from configuration errors or undesired changes. Junos OS maintains an archive of previous configurations, enabling easy rollback to any saved state. Another significant advantage of Junos OS is its modular design. The operating system is structured so that different processes and services run in separate protected memory spaces, enhancing the stability and reliability of the system. If one process fails, it does not affect the others, thereby minimizing the risk of system-wide failures.

NEW QUESTION 8

When considering routing policies, which two statements are correct? (Choose two.)

- A. Routing policies are applied to interfaces as input or export filters.
- B. An import routing policy for BGP determines which received prefix advertisements are placed in the routing information base.
- C. Policy terms are evaluated from top to bottom with action taken on the first match found.
- D. Policy terms are evaluated from top to bottom with the most restrictive action taken of all the matching terms.

Answer: BC

Explanation:

Routing policies in Junos OS are crucial for controlling route advertisements and path selection. The correct answers are B and C. An import routing policy for BGP determines which received prefix advertisements are placed in the routing information base (RIB), and policy terms are evaluated from top to bottom, with action taken on the first match found. This sequential evaluation allows for precise control over routing decisions.

NEW QUESTION 9

You configured your system authentication order using the set authentication-order tacplus radius password command. Which statement is correct in this scenario?

- A. A rejection by TACACS+ will prevent a login and bypass the other two authentication methods.
- B. The password authentication will only be used if the TACACS+ and RADIUS servers fail to respond.
- C. All authentication methods are used with the most restrictive permission set used.
- D. The password authentication method is evaluated if the TACACS+ and RADIUS servers respond with a reject message.

Answer: B

Explanation:

In the scenario where the system authentication order is set to "tacplus radius password," the correct statement is (B). If the TACACS+ and RADIUS servers are unreachable or fail to respond, the system will fall back to using password authentication. This ensures that users can still authenticate using locally stored passwords if external authentication servers are unavailable.

NEW QUESTION 10

Which process in the Junos OS is responsible for maintaining routing protocols and tables?

- A. mgd
- B. chassisd
- C. rpd

D. dcd

Answer: C

Explanation:

The Routing Protocol Daemon (rpd) in Junos OS is responsible for maintaining routing protocols and tables. It handles all routing information, including the calculation of routes and the population of the routing table, making it crucial for dynamic routing operations.

NEW QUESTION 10

What are two link-state routing protocols? (Choose two.)

- A. RIP
- B. BGP
- C. OSPF
- D. IS-IS

Answer: CD

Explanation:

Link-state routing protocols are a type of routing protocol used in packet-switching networks for finding the best path between source and destination. OSPF (Open Shortest Path First) and IS-IS (Intermediate System to Intermediate System) are both examples of link-state routing protocols. They work by maintaining a complete map or topology of the network, allowing routers to independently calculate the best path to each destination. Unlike distance-vector protocols like RIP, link-state protocols are more efficient and scalable, making them suitable for larger networks.

NEW QUESTION 11

Which two statements are true about the candidate configuration? (Choose two.)

- A. Candidate configuration changes are automatically applied.
- B. You can deploy multiple changes at the same time.
- C. Multiple users cannot modify the same candidate configuration.
- D. You can discard changes before committing them.

Answer: BD

Explanation:

The candidate configuration in Junos OS is a temporary configuration that allows network administrators to make and stage multiple configuration changes before applying them to the device. This approach enables the deployment of multiple changes in a single operation, ensuring that all configurations work together as intended before making them active. Additionally, the candidate configuration can be discarded if the administrator decides not to apply the staged changes, allowing for a "trial and error" approach without affecting the currently active configuration. This feature provides flexibility and reduces the risk of disruptive changes to the network.

NEW QUESTION 15

A network administrator is attempting to route traffic on a Juniper switch to one of three different VLANs: Prod, Test, and Dev. Each VLAN has been assigned a numerical value.

In this scenario, what are these numerical values called?

- A. defaults
- B. interfaces
- C. names
- D. tags

Answer: D

Explanation:

In the context of VLANs (Virtual Local Area Networks) on a Juniper switch, the numerical values assigned to each VLAN, such as those for Prod, Test, and Dev, are known as VLAN tags. These tags are part of the 802.1Q VLAN standard, which allows multiple VLANs to coexist on a single physical network. Each tag uniquely identifies the VLAN to which a frame belongs, enabling the switch to segregate and manage traffic based on VLAN membership. This tagging mechanism allows for efficient traffic separation and management, ensuring that devices within one VLAN do not receive traffic intended for another, thus maintaining network security and efficiency.

NEW QUESTION 16

Which prompt indicates that you are using configuration mode?

- A. >
- B. \$
- C. #
- D. %

Answer: C

Explanation:

In Junos OS, the # prompt indicates that you are in configuration mode. This mode is used for making changes to the configuration of the device.

Reference: Juniper Networks CLI Modes

"The # prompt indicates that you are in configuration mode."

NEW QUESTION 21

Which protocol is responsible for learning an IPv4 neighbor's MAC address?

- A. Address Resolution Protocol (ARP)
- B. Network Address Translation (NAT)
- C. Media Access Control Security (MACsec)
- D. Neighbor Discovery Protocol (NDP)

Answer: A

Explanation:

The Address Resolution Protocol (ARP) is responsible for mapping an IPv4 address to a machine's MAC address. ARP operates at Layer 2 of the OSI model and is used to find the MAC address of a host given its IPv4 address. When a device wants to communicate with another device on the same local network, it uses ARP to discover the recipient's MAC address.

References:

? Juniper official documentation: ARP.

? Networking standards: RFC 826.

NEW QUESTION 25

Which statement is correct concerning exception traffic processing?

- A. Exception traffic is always dropped during congestion.
- B. Exception traffic is rate-limited to protect the RE.
- C. Exception traffic is discarded by the PFE.
- D. Exception traffic is never forwarded.

Answer: B

Explanation:

Exception traffic refers to packets that the Packet Forwarding Engine (PFE) cannot process normally and must be forwarded to the Routing Engine (RE) for further processing. This includes packets destined for the router itself or packets needing special handling that the PFE cannot provide. To protect the RE from being overwhelmed by such traffic, which could potentially impact the router's control plane functions, exception traffic is rate-limited. This means that there's a threshold to how much exception traffic can be sent to the RE, ensuring that the router's critical management and control functions remain stable and responsive even during high traffic volumes or attacks.

NEW QUESTION 30

Which Junos feature limits the amount of exception traffic that is sent from the PFE to the RE?

- A. scheduler
- B. policer
- C. CoS markings
- D. routing policy


Answer: B

Explanation:

In Junos OS, a policer is a feature used to limit the rate of traffic flow in the network, including exception traffic sent from the Packet Forwarding Engine (PFE) to the Routing Engine (RE). Exception traffic consists of packets that cannot be processed by the PFE alone and require intervention by the RE, such as control packets or packets destined for the device itself. A policer can be configured to enforce bandwidth limits and drop or mark packets that exceed specified rate limits, thus protecting the RE from being overwhelmed by excessive exception traffic.

NEW QUESTION 32

Exhibit.

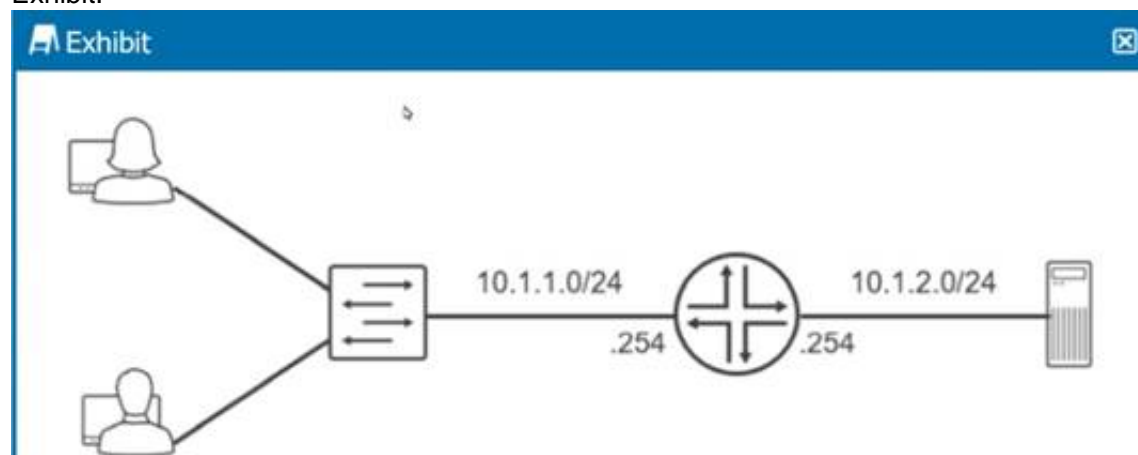

Referring to the exhibit, which routing configuration is required for these two users to access the remote server?

- A. Users must connect directly to the router.
- B. Users and the server require a default gateway.
- C. Trunk ports must be enabled on the switch.
- D. A routing protocol must be enabled on the router.

Answer: B

Explanation:

For the users in the 10.1.1.0/24 subnet and the server in the 10.1.2.0/24 subnet to communicate with each other, they need to route packets through the router that connects these two subnets. Each user and the server need to have their default gateway set to the IP address of the router interface on their respective subnet (.254). This ensures that packets destined for other subnets are sent to the router, which then routes them to the correct destination subnet.

References:

? Juniper official documentation: Configuring Basic Routing.

? General networking principles.

NEW QUESTION 37

You have completed the initial configuration of your new Junos device. You want to be able to load this configuration at a later time. Which action enables you to perform this task?

- A. Enter the load factory-default command.
- B. Enter the request system reboot command.
- C. Enter the request system zeroize command.
- D. Enter the request system configuration rescue save command.

Answer: D

Explanation:

In Junos OS, the request system configuration rescue save command is used to save the current active configuration as a rescue configuration. This feature is particularly useful for preserving a known good configuration state that can be quickly reverted to in case of configuration errors or issues. By saving a rescue configuration, administrators can ensure that they have a reliable fallback option that can be loaded in the future to restore the device's operation without having to reconfigure from scratch. This is an essential practice for maintaining network stability and quick recovery.

NEW QUESTION 42

Which two statements are true about the PFE? (Choose two.)

- A. The PFE implements various services such as policing, stateless firewall filtering, and class of service.
- B. The PFE uses Layer 2 and Layer 3 forwarding tables to forward traffic toward its destination.
- C. The PFE handles all processes that control the chassis components.
- D. The PFE is responsible for performing protocol updates and system management.

Answer: AB

Explanation:

The Packet Forwarding Engine (PFE) in Juniper Networks devices is the heart of the data plane, handling the actual forwarding of packets based on pre-computed forwarding tables. It provides several critical services to manage and control traffic flow, including policing (to enforce bandwidth limits for certain traffic types), stateless firewall filtering (to permit or deny traffic based on predefined criteria), and Class of Service (CoS) (to prioritize traffic to ensure quality of service for critical applications). The PFE utilizes both Layer 2 (MAC addresses) and Layer 3 (IP addresses) forwarding tables to make intelligent forwarding decisions, ensuring that packets are efficiently routed toward their final destination.

NEW QUESTION 47

Which character is used to filter the command output in the Junos CLI?

- A. |
- B. >
- C. <
- D. ?

Answer: A

Explanation:

In the Junos CLI, the pipe character | is used as a filter operator to refine command output. This operator can be combined with various filtering commands like match, except, count, etc., to display only the relevant portions of the command output. For example, using | match <pattern> filters the output to show only the lines that contain the specified pattern, making it easier to find specific information within extensive command output. This functionality is especially useful in managing and troubleshooting complex configurations and network states, allowing for more efficient analysis of the device's operational status and configuration details.

NEW QUESTION 50

You have just increased the MTU size of interface ge-0/0/0 and committed the configuration. Which command would help you identify the applied MTU change?

- A. monitor interface ge-0/0/0
- B. monitor traffic interface ge-0/0/0
- C. show interfaces ge-0/0/0 terse
- D. show interfaces ge-0/0/0

Answer: D

Explanation:

After increasing the MTU size of an interface and committing the configuration, the command to verify the applied MTU change is D, "show interfaces ge- 0/0/0." This command displays detailed information about the interface, including the current MTU size, making it the best choice for verifying the applied changes.

NEW QUESTION 55

You are asked to convert the number 7 from decimal to binary. Which number is correct in this scenario?

- A. 00001000
- B. 00010000
- C. 00000111
- D. 11100000

Answer: C

Explanation:

To convert the decimal number 7 to binary, the correct representation is 00000111 (C). In binary, 7 is represented as $1+2+4$ ($2^0 + 2^1 + 2^2$), which corresponds to the last three digits being 1 in the binary format, with leading zeros added for clarity.

NEW QUESTION 56

Exhibit
term limit-icmp { from { source-address { 172.25.11.0/24;
}
protocol icmp;
}
then {
count count-icmp; discard;
}
}

Referring to the exhibit, which two actions will occur when a packet matches the firewall filter? (Choose two.)

- A. An ICMP destination unreachable message will be returned.
- B. The packet will be forwarded.
- C. The packet will be discarded.
- D. A counter will be incremented.

Answer: C

Explanation:

Referring to the firewall filter configuration in the exhibit, when a packet matches the specified term limit-icmp, two actions are defined in the then statement: count count-icmp and discard. The count count-icmp action means that each time a packet matches this term, a counter named count-icmp will be incremented, providing a tally of how many packets have matched the term. The discard action means that the packet will be dropped and not forwarded through the device. This effectively prevents the packet from reaching its intended destination. There is no action specified that would cause an ICMP destination unreachable message to be returned, nor is there any action that would allow the packet to be forwarded.

NEW QUESTION 61

What does the user@router> clear log ospf-trace command accomplish?

- A. Logging data into ospf-trace is stopped.
- B. Trace parameters are removed from the OSPF protocol configuration.
- C. Data in the ospf-trace file is removed and logging continues.
- D. The ospf-trace file is deleted.

Answer: C

Explanation:

The clear log ospf-trace command on a Juniper Networks router is used specifically to manage the contents of the log file named ospf-trace. Executing this command clears or deletes the existing data within the ospf-trace log file but does not stop the logging process. The router continues to log new OSPF-related events and data into this file after the command is executed. This functionality is crucial for troubleshooting and monitoring the OSPF (Open Shortest Path First) protocol's operation by allowing network administrators to remove old or irrelevant log data while continuously capturing new events without interruption.

NEW QUESTION 64

Which type of device uses the destination IP address to forward packets?

- A. Layer 3 router
- B. Layer 2 switch
- C. repeater
- D. hub

Answer: A

Explanation:

A Layer 3 router forwards packets based on the destination IP address. It operates at the network layer of the OSI model and uses routing tables to determine the best path for packet delivery. Unlike Layer 2 switches, which forward packets based on MAC addresses, routers handle logical addressing, making them crucial for inter-network communication.

Reference:

Junos OS Documentation on Routing Fundamentals.

NEW QUESTION 65

By default, how does the PFE manage unicast traffic destined for an existing forwarding table entry?

- A. It sends the traffic through multiple ports toward its destination.
- B. It sends the traffic through one port toward its destination.
- C. It sends the traffic through the f xpl interface to the RE.
- D. It sends all traffic to the control plane for further processing.

Answer: B

Explanation:

In a Juniper Networks device, the Packet Forwarding Engine (PFE) processes unicast traffic by forwarding it according to the existing entries in the forwarding table. When the PFE encounters unicast traffic destined for an address that has a corresponding entry in the forwarding table, it directs the traffic through a specific outgoing interface or port toward its destination. This process is based on the most efficient path determined by the routing protocols in use, ensuring that the packet reaches its intended destination through a singular path, unless specific configurations such as load balancing are in place.

NEW QUESTION 68

Which two statements describe the result when you enter ? at the command-line prompt? (Choose two.)

- A. It lists the available commands and options.
- B. It lists tips for the help menu.
- C. It displays help about a text string contained in a statement.
- D. It displays summary information about the commands and options.

Answer: AD

Explanation:

When you enter ? at the command-line prompt in Junos OS, the system provides assistance in two significant ways. Firstly, it lists the available commands and options that can be used at the current point in the command hierarchy, aiding users in understanding what commands they can execute next. Secondly, it displays summary information about those commands and options, providing brief descriptions or additional context that can help users understand the function of each command or option. This feature is particularly useful for learning the command structure or for quick reference when specific command syntax is forgotten.

NEW QUESTION 72

Exhibit

```
[edit system archival] user@router# show configuration {
transfer-on-commit; archive-sites {
"scp://user@172.15.100.2 : /archive" password## SECRET-DATA
"ftp://user@10.210.9.178:/archive" password "$9..."; ## SECRET-DATA
}
```

Referring to the exhibit, where are the configuration backup files stored?

- A. Files are stored to the SCP site and the FTP site in a round-robin manner.
- B. Files are stored to the SCP site and the FTP site simultaneously.
- C. Files are stored to any site as selected by Junos internally.
- D. Files are stored to the SCP site but if the transfer fails, then to the FTP site.

Answer: B

Explanation:

In Junos OS, the archival configuration under [edit system] allows for the automatic backup of configuration files to designated locations upon commit. When multiple archive-sites are specified, as shown in the exhibit with both SCP and FTP sites listed, the device does not choose between them or use them in a round-robin manner. Instead, it attempts to transfer the configuration backup files to all specified sites simultaneously upon each commit. This ensures redundancy and increases the likelihood that a backup will be successfully stored even if one of the transfer methods or destinations fails.

NEW QUESTION 77

Exhibit

```
user@router> show route 192.168.36.1
inet.O: 5 destinations, 6 routes (5 active, 0 holddown, 0 hidden) + = Active Route, - = Last Active, * = Both 192.168.36.1/32 *[Static/5] 00:00:31
> to 10.1.1.2 via ge-0/0/10.0 [OSPF/IO] 00:02:21, metric 1 > to 10.1.1.2 via ge-0/0/10.0
Referring to the exhibit, which route(s) will be selected by Junos for packet forwarding?
```

- A. The OSPF route will be selected.
- B. The static route will be selected.
- C. The Junos OS randomly selects one route.
- D. The Junos OS selects both routes.

Answer: B

Explanation:

Junos OS selects routes based on the route preference (also known as administrative distance). Static routes typically have a lower route preference than OSPF routes, meaning they are more preferred. Since the static route to 192.168.36.1/32 is shown with a preference of 5, it will be selected over the OSPF route for packet forwarding, assuming no other factors such as route filters or policies affect the routing decision.

NEW QUESTION 78

Exhibit

Exhibit

[edit]

```
root# set system host-name TEST_DEVICE [edit]
```

```
root# commit
```

[edit]

'system'

Missing mandatory statement: 'root-authentication' error: commit failed: (missing mandatory statements) [edit] root#

You are configuring a new device.

Which action solves the error shown in the exhibit?

- A. configuring a non-root username and password
- B. configuring a password for the root account
- C. loading the factory-default configuration
- D. reinstalling Junos

Answer: B

Explanation:

The error message in the exhibit indicates that the root-authentication statement is missing, which is mandatory for committing the configuration. In Junos OS, it is required to set a password for the root account to commit any configuration changes. This is a security measure to ensure that unauthorized users cannot access the device's configuration mode. To solve the error shown in the exhibit, configuring a password for the root account is necessary. This can be done by using the

set system root-authentication plain-text-password command, after which the user will be prompted to enter a new password for the root account.

NEW QUESTION 83

What are two benefits when implementing class of service? (Choose two.)

- A. Traffic congestion will be eliminated.
- B. The network will be faster.
- C. Traffic congestion can be managed.
- D. Latency-sensitive traffic can be prioritized.

Answer: C

Explanation:

Class of Service (CoS) in Junos OS provides tools for managing traffic congestion and ensuring that latency-sensitive traffic is given priority over less time-critical data. By implementing CoS, network administrators can classify traffic into different priority levels, apply scheduling policies to ensure that high-priority traffic is transmitted first, and use congestion management techniques such as queue buffers and drop profiles. This helps in maintaining the quality of service for critical applications, especially during periods of high network congestion. However, CoS does not eliminate congestion entirely nor does it inherently make the network faster; it provides a mechanism for better managing and controlling traffic flows according to their importance and time sensitivity.

NEW QUESTION 85

How many login classes are assignable to a user account?

- A. 3
- B. 2
- C. 4
- D. 1

Answer: D

Explanation:

<https://www.juniper.net/documentation/us/en/software/junos/user-access-evo/user-access/topics/topic-map/junos-os-login-class.html#:~:text=You%20can%20define%20any%20number,to%20an%20individual%20user%20account.>

In Junos OS, each user account can be assigned only one login class. Login classes in Junos OS define the permissions for users, controlling what they can access and modify within the system. This setup helps in maintaining a clear and secure access control mechanism.

Reference:

Junos OS Documentation on User Accounts and Login Classes.

NEW QUESTION 87

Which two statements are correct about MAC addresses? (Choose two.)

- A. Switches use the Address Resolution Protocol table to assign MAC addresses to network interface cards in the forwarding frame.
- B. The source and destination MAC addresses always remains static to the final destination.
- C. The MAC address identifies the physical hardware.
- D. Switches use the destination MAC address to identify the next-hop destination and to change the destination MAC address in the frame.

Answer: CD

Explanation:

MAC (Media Access Control) addresses are unique identifiers assigned to network interfaces for communications at the data link layer of a network segment. MAC addresses are used to identify the physical hardware on a network. In the context of Ethernet switches, the destination MAC address in incoming frames is used to determine the appropriate output port for forwarding the frame towards its final destination. The switch does not change the destination MAC address; it uses the MAC address to make forwarding decisions within the local network segment.

NEW QUESTION 89

Exhibit

```
policy-options {  
  policy-statement Load-Balance-Policy {  
    term Load-Balance {  
      then {  
        load-balance per-flow;  
        accept;  
      }  
    }  
  }  
}
```

```
routing-options {  
  router-id 192.168.100.11;  
  autonomous-system 65201;  
  forwarding-table {  
    export Load-Balance-Policy;  
  }  
}
```

Referring to the exhibit, which two statements are correct? (Choose two.)

- A. The policy enables equal cost load balancing in the forwarding table.
- B. The policy must be applied under the protocols hierarchy.
- C. The policy enables per-packet load balancing.
- D. The policy enables flow-based load balancing.

Answer: A

Explanation:

The load-balance per-flow statement in the Junos OS policy-options configuration enables flow-based load balancing in the forwarding table. This means that the traffic is distributed across multiple paths based on flows, where a flow is typically identified by attributes such as source and destination IP addresses, and possibly layer 4 information like TCP/UDP ports. This allows for more granular and efficient utilization of available paths, avoiding overloading a single path. The policy does not enable per-packet load balancing, which would send individual packets of the same flow over different paths, potentially causing out-of-order delivery issues. The policy's placement in the forwarding-table export suggests it's intended to influence forwarding behavior, not just routing protocol decisions, and does not necessarily have to be applied under the protocols hierarchy.

NEW QUESTION 93

Which service does RADIUS provide?

- A. routing
- B. authentication
- C. DNS resolution
- D. time synchronization

Answer: B

Explanation:

RADIUS, which stands for Remote Authentication Dial-In User Service, provides authentication services for users trying to access a network. It is a networking protocol that provides centralized Authentication, Authorization, and Accounting (AAA) management for users who connect and use a network service.

NEW QUESTION 96

Exhibit

```
{hold:node0}[edit]
```

```
root# set system root-authentication ?
```

Possible completions:

- + apply-groups Groups from which to inherit configuration data
- + apply-groups-except Don't inherit configuration data from these groups
- encrypted-password Encrypted password string
- load-key-file File (URL) containing one or more ssh keys
- plain-text-password Prompt for plain text password (autoencrypted)
- > ssh-dsa Secure shell (ssh) DSA public key string
- > ssh-rsa Secure shell (ssh) RSA public key string

```
{hold:node0}[edit]
```

```
root# set system root-authentication plain-text-password
```

New password:

Retype new password:

```
{hold:node0}[edit]
```

```
root# commit and-quit
```

```
[edit interfaces]
```

```
'ge-0/0/0'
```

HA management port cannot be configured

error: configuration check-out failed

```
{hold:node0}[edit]
```

```
root#
```

You are unable to remotely access your Juniper device using the CLI.

Referring to the exhibit, which command would you add to the existing configuration to enable remote CLI access?

- A. load factory-default
- B. set system root-authentication plain-text-password
- C. set system services ssh
- D. set system login idle-timeout 20

Answer: C

Explanation:

In Junos OS, remote access to the device's CLI is commonly facilitated through Secure Shell (SSH), a protocol providing secure command-line access over an insecure network. The given exhibit indicates an attempt to set a root authentication password but does not show configuration for enabling remote access services. To enable SSH, which is not shown in the configuration snippet, you need to configure the device to accept SSH connections. This is done by enabling the SSH service within the system services hierarchy of the configuration. The correct command to add to the existing configuration for enabling remote CLI access via SSH is set system services ssh. This command activates the SSH service, allowing secure remote logins to the device.

NEW QUESTION 97

Which two statements are correct about firewall filters? (Choose two.)

- A. "Discard" is the default action of packets that are not explicitly allowed.
- B. There can be only one firewall filter.
- C. "Accept" is the default action of packets that are not explicitly allowed.
- D. There can be multiple firewall filters.

Answer: AD

Explanation:

In Juniper Networks devices, firewall filters are used to control packet flow through the device. The default action for packets that do not match any of the specified criteria in the firewall filter is to discard them, enhancing network security by ensuring that only explicitly allowed traffic can pass through. Furthermore, it is possible to configure multiple firewall filters on a device, allowing for granular control over traffic based on various criteria such as source, destination, and protocol type.

NEW QUESTION 100

What are two types of transit traffic that traverse the forwarding plane of a Layer 3 router? (Choose two.)

- A. unicast traffic
- B. multicast traffic
- C. exception traffic
- D. broadcast traffic


Answer: AB

Explanation:

Transit traffic that traverses the forwarding plane of a Layer 3 router includes both unicast and multicast traffic types. Unicast traffic is directed from a single source to a single destination, while multicast traffic is sent from one source to multiple destinations that are part of a multicast group. These types of traffic are efficiently routed through the network by leveraging the router's forwarding plane capabilities. Exception traffic, which requires special handling by the control plane, and broadcast traffic, which is typically limited to a single broadcast domain and not usually forwarded by Layer 3 routers, are not considered standard types of transit traffic for the forwarding plane of a router.

NEW QUESTION 105

Click the Exhibit button.

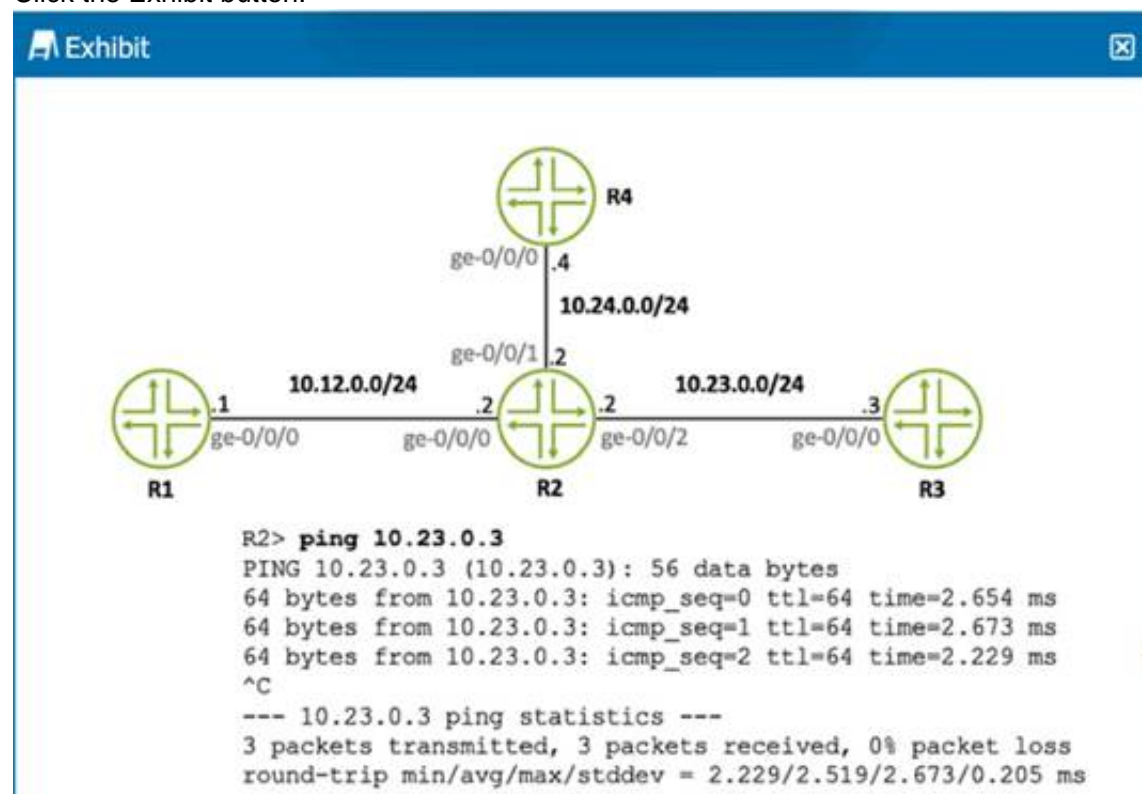

Referring to the exhibit, what is the source IP address of the ping that was executed?

- A. 10.12.0.2
- B. 10.23.0.2
- C. 10.23.0.3
- D. 10.24.0.4

Answer: B

Explanation:

The exhibit shows a ping test being executed from router R2 to the IP address 10.23.0.3. Since the ping command is issued on R2 and we see successful replies from 10.23.0.3, it means the source of the ping must be an interface on R2. Given the network diagram and the IP address scheme, the source IP address of the ping is on the interface ge-0/0/2 of R2, which is in the subnet 10.23.0.0/24. The only logical IP address for R2's interface in this subnet, based on standard networking practices and the given options, would be 10.23.0.2. The other addresses provided in the options belong to different subnets or are the destination of the ping itself.

NEW QUESTION 110

Which two statements are true about the Junos OS? (Choose two.)

- A. Routing tables are stored in the control plane.
- B. Exception traffic is never sent to the control plane.
- C. Exception traffic is sent to the control plane.
- D. Routing tables are stored in the forwarding plane.

Answer: AC

Explanation:

In Junos OS, as with many network operating systems, the control plane is responsible for processes that determine how to route traffic. This includes maintaining routing tables, which store information about network paths and protocols. Therefore, routing tables are indeed stored in the control plane.

Exception traffic refers to packets that cannot be processed by the normal fast-path processing of the Packet Forwarding Engine (PFE) in the forwarding plane, and thus are sent to the control plane for further processing. This might include packets destined for the router itself, packets that need to be fragmented, or packets that match certain firewall filter criteria, among other reasons.

Routing tables are not stored in the forwarding plane. However, the forwarding plane contains the forwarding table (sometimes referred to as the forwarding information base or FIB), which is a distilled version of the routing table optimized for fast packet forwarding. The forwarding plane uses this information to perform the actual transfer of packets across the network device interfaces.

NEW QUESTION 111

Which protocol would you configure to synchronize the time and date on a Junos device?

- A. SNMP
- B. RIP
- C. NTP
- D. NMP

Answer: C

Explanation:

The Network Time Protocol (NTP) is designed to synchronize the clocks of computers over a network. Configuring NTP on a Junos device ensures that its clock is

set accurately, which is crucial for logging, troubleshooting, and maintaining the integrity of time-sensitive operations and security protocols. NTP allows devices to use a hierarchy of time sources, from primary servers synchronized to a reference clock (such as an atomic clock or GPS time) to secondary servers that distribute the time to other devices on the network.

NEW QUESTION 116

You have logged on to a Junos device and are at the operational mode prompt. Which two commands are used at this prompt? (Choose two.)

- A. show interface ge-0/0/0
- B. request system shutdown
- C. set interface ge-0/0/0 unit 0 family inet
- D. run show interface terse

Answer: A

Explanation:

At the operational mode prompt on a Junos device, you can use various commands to view the device's status and request system operations. The show interface ge-0/0/0 command is used to display information about a specific interface, while the request system shutdown command is used to properly shut down the device. The set command is used in configuration mode, not operational mode, and the run command is used to execute operational mode commands from configuration mode.

NEW QUESTION 119

You issue the telnet 10.10.10.1 source 192.168.100.1 command. Which two statements are correct in this scenario? (Choose two.)

- A. The telnet session will have a source address of 10.10.10.1.
- B. The telnet session will have a destination address of 192.168.100.1.
- C. The telnet session will have a destination address of 10.10.10.1.
- D. The telnet session will have a source address of 192.168.100.1.

Answer: CD

Explanation:

In the given telnet command, "telnet 10.10.10.1 source 192.168.100.1," the destination address of the telnet session is 10.10.10.1, and the source address of the session is specified as 192.168.100.1, making C and D the correct answers. This command instructs the telnet client to use the specified source IP address when establishing the connection to the destination.

NEW QUESTION 121

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual JN0-105 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the JN0-105 Product From:

<https://www.2passeasy.com/dumps/JN0-105/>

Money Back Guarantee

JN0-105 Practice Exam Features:

- * JN0-105 Questions and Answers Updated Frequently
- * JN0-105 Practice Questions Verified by Expert Senior Certified Staff
- * JN0-105 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * JN0-105 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year