

Exam Questions 300-620


Implementing Cisco Application Centric Infrastructure (DCACI)

<https://www.2passeasy.com/dumps/300-620/>




NEW QUESTION 1


An engineer is implementing a Cisco ACI data center network that includes Cisco Nexus 2000 Series 10G fabric extenders. Which physical topology is supported?

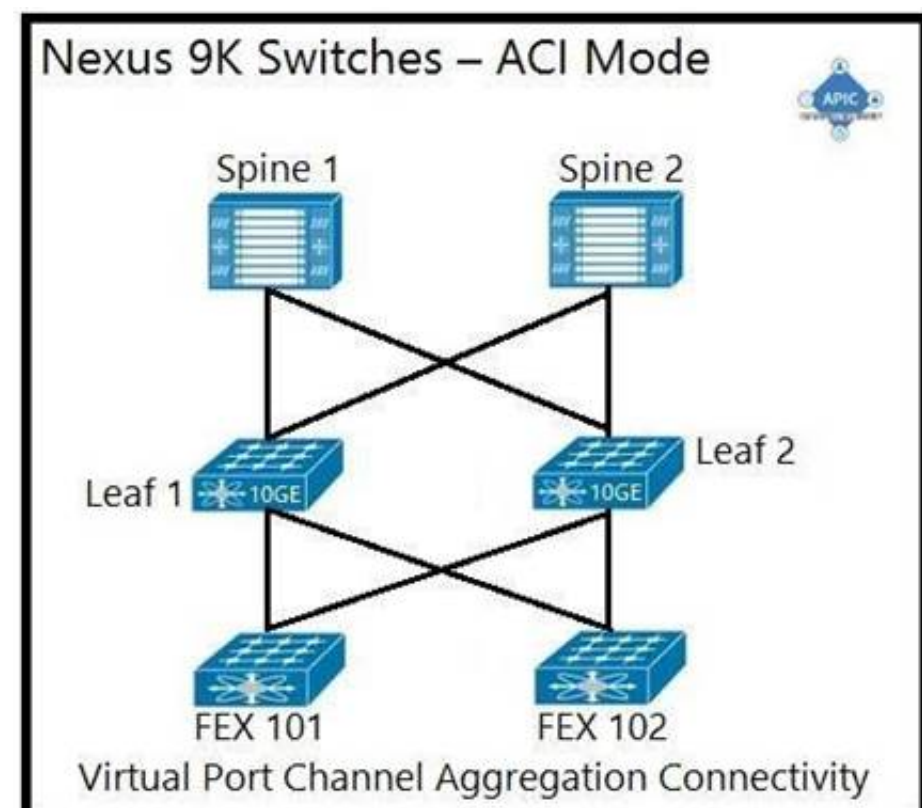


B.

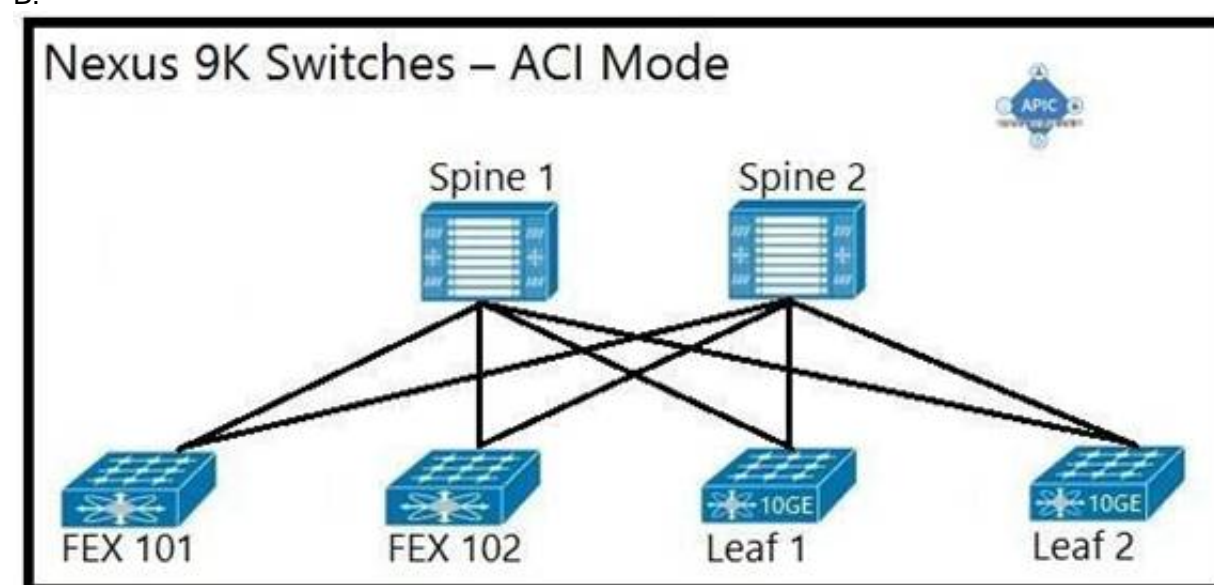

C.

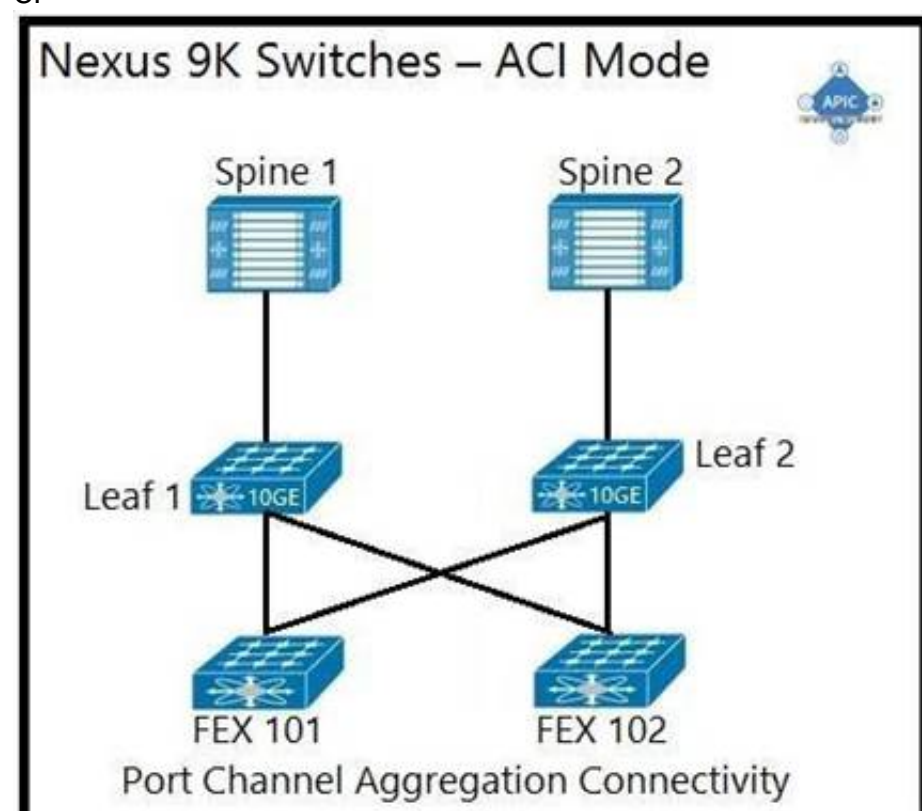

A.

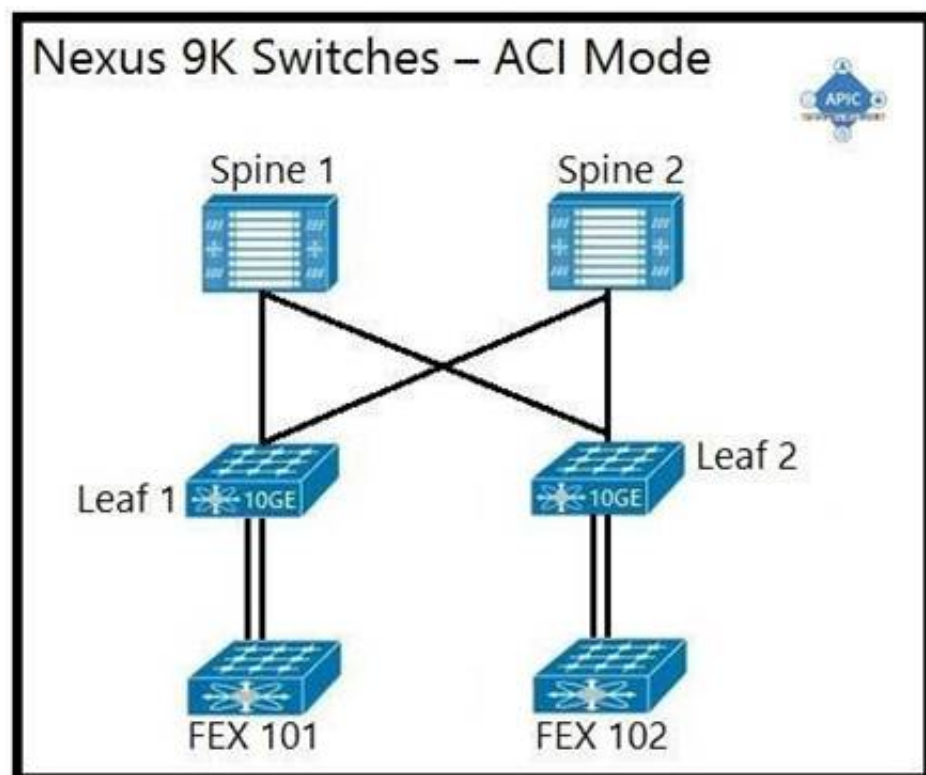

Answer: D

NEW QUESTION 2

Refer to the exhibit.

```
<fvTenant name="ACILab">
  <fvCtx name="pvn1"/>
  <fvBD name="bd1">
    <fvRsCtx tnFvCtxName="pvn1"/>
    <fvSubnet ip="10.1.100.1/24"/>
  </fvBD>
</fvTenant>
```

Which two objects are created as a result of the configuration? (Choose two.)

- A. application profile
- B. attachable AEP
- C. bridge domain
- D. endpoint group
- E. VRF

Answer: CE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/rest_cfg/2_1_x/b_Cisco_APIC_REST_API_Configuration_Guide/b_Cisco_APIC_REST_API_Configuration_Guide_chapter_01110.html

NEW QUESTION 3

An engineer configured Layer 2 extension from the ACI fabric and changed the Layer 2 unknown unicast policy from Flood to Hardware Proxy. How does this change affect the flooding of the L2 unknown unicast traffic?

- A. It is forwarded to one of the spines to perform as a spine proxy.
- B. It is flooded within the whole fabric.
- C. It is dropped by the leaf when the destination endpoint is not present in the endpoint table.
- D. It is forwarded to one of the APICs to perform as a proxy.

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 4

When Cisco ACI connects to an outside Layers 2 network, where does the ACI fabric flood the STP BPDU frame?

- A. within the bridge domain
- B. within the APIC
- C. within the access encap VLAN
- D. between all the spine and leaf switches

Answer: A

Explanation:

Reference: https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c07-732033.html#_Toc395143571

NEW QUESTION 5

On which two interface types should a user configure storm control to protect against broadcast traffic? (Choose two.)

- A. APIC facing interfaces
- B. port channel on a single leaf switch
- C. all interfaces on the leaf switches in the fabric
- D. endpoint-facing trunk interface
- E. fabric uplink interfaces on the leaf switches

Answer: BD

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_01010.html

NEW QUESTION 6

Which two dynamic routing protocols are supported when using Cisco ACI to connect to an external Layer 3 network? (Choose two.)

- A. iBGP
- B. VXLAN
- C. IS-IS
- D. RIPv2
- E. eBGP

Answer: AE

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010010.html

NEW QUESTION 7

What must be configured to redistribute externally learned OSPF routes within the ACI fabric?

- A. Route Control Profile
- B. BGP Route Reflector
- C. BGP Inter-leak Route Map
- D. PIM Sparse Mode

Answer: B

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010010.html

NEW QUESTION 8

Refer to the exhibit.

Terminate Nodes:		Name	Provider/Consumer
		T1	Consumer
		T2	Provider

Connections:	Name	Connected Nodes	Direct Connect	Unicast Route	Adjacency Type
	C1	N1, T1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="text" value="L3Out"/>
	C2	N1, T2	False		

Update Cancel

Which Adjacency Type value should be set when the client endpoint and the service node interface are in a different subnet?

- A. Routed
- B. Unicast
- C. L3Out
- D. L3

Answer: D

NEW QUESTION 9

Refer to the exhibit.

Create vCenter Domain

vCenter Credentials:

Profile name	Username	Description
Lab-VCenter	admin	

vCenter:

Name	IP	Type	Stats Collection
Lab-VCenter	vcenter.aci.lab	vCenter	Disabled

Port Channel Mode:

select a value

Static Channel – Mode On

LACP Active

LACP Passive

MAC Pinning+

MAC Pinning-Physical-NIC-load

Cancel

Submit

An engineer is implementing Cisco ACI – VMware vCenter integration for a blade server that lacks support of bonding. Which port channel mode results in “route based on originating virtual port” on the VMware VDS?

- A. Static Channel – Mode On
- B. MAC Pinning-Physical-NIC-load
- C. LACP Passive
- D. MAC Pinning+
- E. LACP Active

Answer: D

NEW QUESTION 10

Which tenant is used when configuring in-band management IP addresses for Cisco APICs, leaf nodes, and spine nodes?

- A. default
- B. infra
- C. common
- D. mgmt

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Configuring_Static_Management_Access.html#concept_CFF63FEBE947424291B0F10E6F23DA7D

NEW QUESTION 10

What represents the unique identifier of an ACI object?

- A. universal resource identifier (URI)
- B. application programming interface
- C. management information tree
- D. distinguished name

Answer: D

Explanation:

Reference: <https://www.slideshare.net/CiscoDevNet/introduction-to-aci-apis>

NEW QUESTION 14

Refer to the exhibit.

Edit Stats Threshold

transmit B2B credit cumulative

Normal Value: 300

Threshold Direction: Both Rising Falling

Rising Thresholds to Config: ☒ ☐

- ☒ Critical
- ☐ Major
- ☐ Minor
- ☒ Warning

Rising

Set

Reset

Critical

500

Major

Minor

Warning

400

300

A client reports that the ACI domain connectivity to the fiber channel storage is experiencing a B2B credit oversubscription. The environment has a SYSLOG server for state collection messages. Which value should be chosen to clear the critical fault?

- A. 300
- B. 410
- C. 350
- D. 510

Answer: B

NEW QUESTION 15

Which two protocols support accessing backup files on a remote location from the APIC? (Choose two.)

- A. TFTP
- B. FTP
- C. SFTP
- D. SMB
- E. HTTPS

Answer: BC

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/troubleshooting/b_APIC_Troubleshooting/b_APIC_Troubleshooting_appendix_010011.html

NEW QUESTION 20

Which two statements regarding ACI Multi-Site are true? (Choose two.)

- A. The Multi-Site orchestrator must be directly attached to one ACI leaf.
- B. Routers in the Inter-Site network must run OSPF, DHCP relay, and MP-BGP.
- C. ACI Multi-Site is a solution that supports a dedicated APIC cluster per site.
- D. ACI Multi-Site is a solution that allows one APIC cluster to manage multiple ACI sites.
- E. The Inter-Site network routers should run OSPF to establish peering with the spines.

Answer: AE

NEW QUESTION 21

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 300-620 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 300-620 Product From:

<https://www.2passeasy.com/dumps/300-620/>

Money Back Guarantee

300-620 Practice Exam Features:

- * 300-620 Questions and Answers Updated Frequently
- * 300-620 Practice Questions Verified by Expert Senior Certified Staff
- * 300-620 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 300-620 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year