

Exam Questions OmniStudio-Developer

Salesforce Certified OmniStudio Developer (SU21)

<https://www.2passeasy.com/dumps/OmniStudio-Developer/>



NEW QUESTION 1

A developer needs to create . DataRaptor to retrieve the name of an account for a contact. Following best practices, how should a developer configure the extraction steps?

- A. Define an extraction step for the Contact object and set the Extract JSON Path to Contact Account.Name
- B. Define extraction steps for the Contact and the Account objects, and set the Extract JSON Path to Contact Account.Name
- C. Define extraction steps for the Contact and the Account objects, and set the Extract 3JSON Path to Account.Name
- D. Define an extractionstep for the Account object, and set the Extract JSON Path to AccountContact.Name

Answer: A

NEW QUESTION 2

A developer is building an OmniScript and needs to save to Salesforce and to an AWS Order Management system. Which OmniScriptelement could save all of this data?

- A. DataRaptor Post Action
- B. HTTP Action
- C. Integration Procedure Action
- D. DataRaptor Load Action

Answer: C

NEW QUESTION 3

A developer need to use the CONTIF function to process data entered by the user in an OmniScript. The output of the function needs to be displayed to the user immediately in the current step.

Based on best practice, what element should the developer use this function in?

- A. A Calculation Action element
- B. A Set Valueselement
- C. A formula element
- D. A Range element

Answer: C

NEW QUESTION 4

An OmniScript updates data from one Salesforce record, but when it completes, only some of the data is updated in Salesforce. A DataRaptor Load saves the data. What error could cause this behavior?

Choose 2 answers

- A. The fields that are not updated are read only in Salesforce.
- B. In the DataRaptor Load, in the Preview tab, the Record is from the wrong record type.
- C. The input JSON paths In the DataRaptor Load do not match the JSON from the OmniScript.
- D. ContextId is misspelled in the merge code thatpasses the RecordId to the DataRaptor


Answer: AC

NEW QUESTION 5

A customer sets up to LWC Omniscritps, one embedded into another. Account is set in a Set Values element in the parent Omniscritp. The AccountId set in the parent Omniscritp is used to another Set Values elementContextAccountid in the embedded Omniscritp. The embedded Omniscritp is activated.

While previewing the OmniScript flow from the parent, it is found that Account is set correctly in the parent OmniScript. However. ContextAccountid in the embedded Omniscritp is not set with the AccountId from parent Omniscritp. On previewing the embedded Omniscritp individually, it is found that ContextAccountid is set correctly.

What is the reason for this? Refer to the exhibit below.

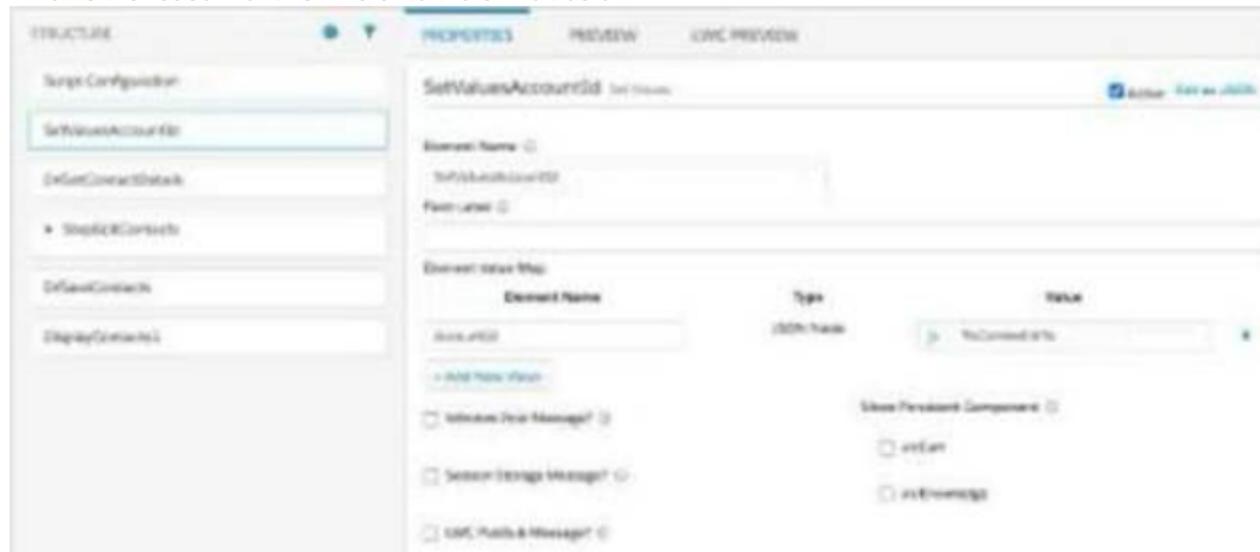




- A. Both parent and embedded OmniScripts have the same element name for the Set values element.
- B. A developer failed to include a Navigation Element to pass data from the parent OmniScript.
- C. The LWC PubSub Message flag in the Set Values action of the parent has not been set.
- D. The flagpassDataJSON in the parent OmniScript in not configured correctly.

Answer: C

NEW QUESTION 6

What is the reason for this? Refer to the exhibit below.

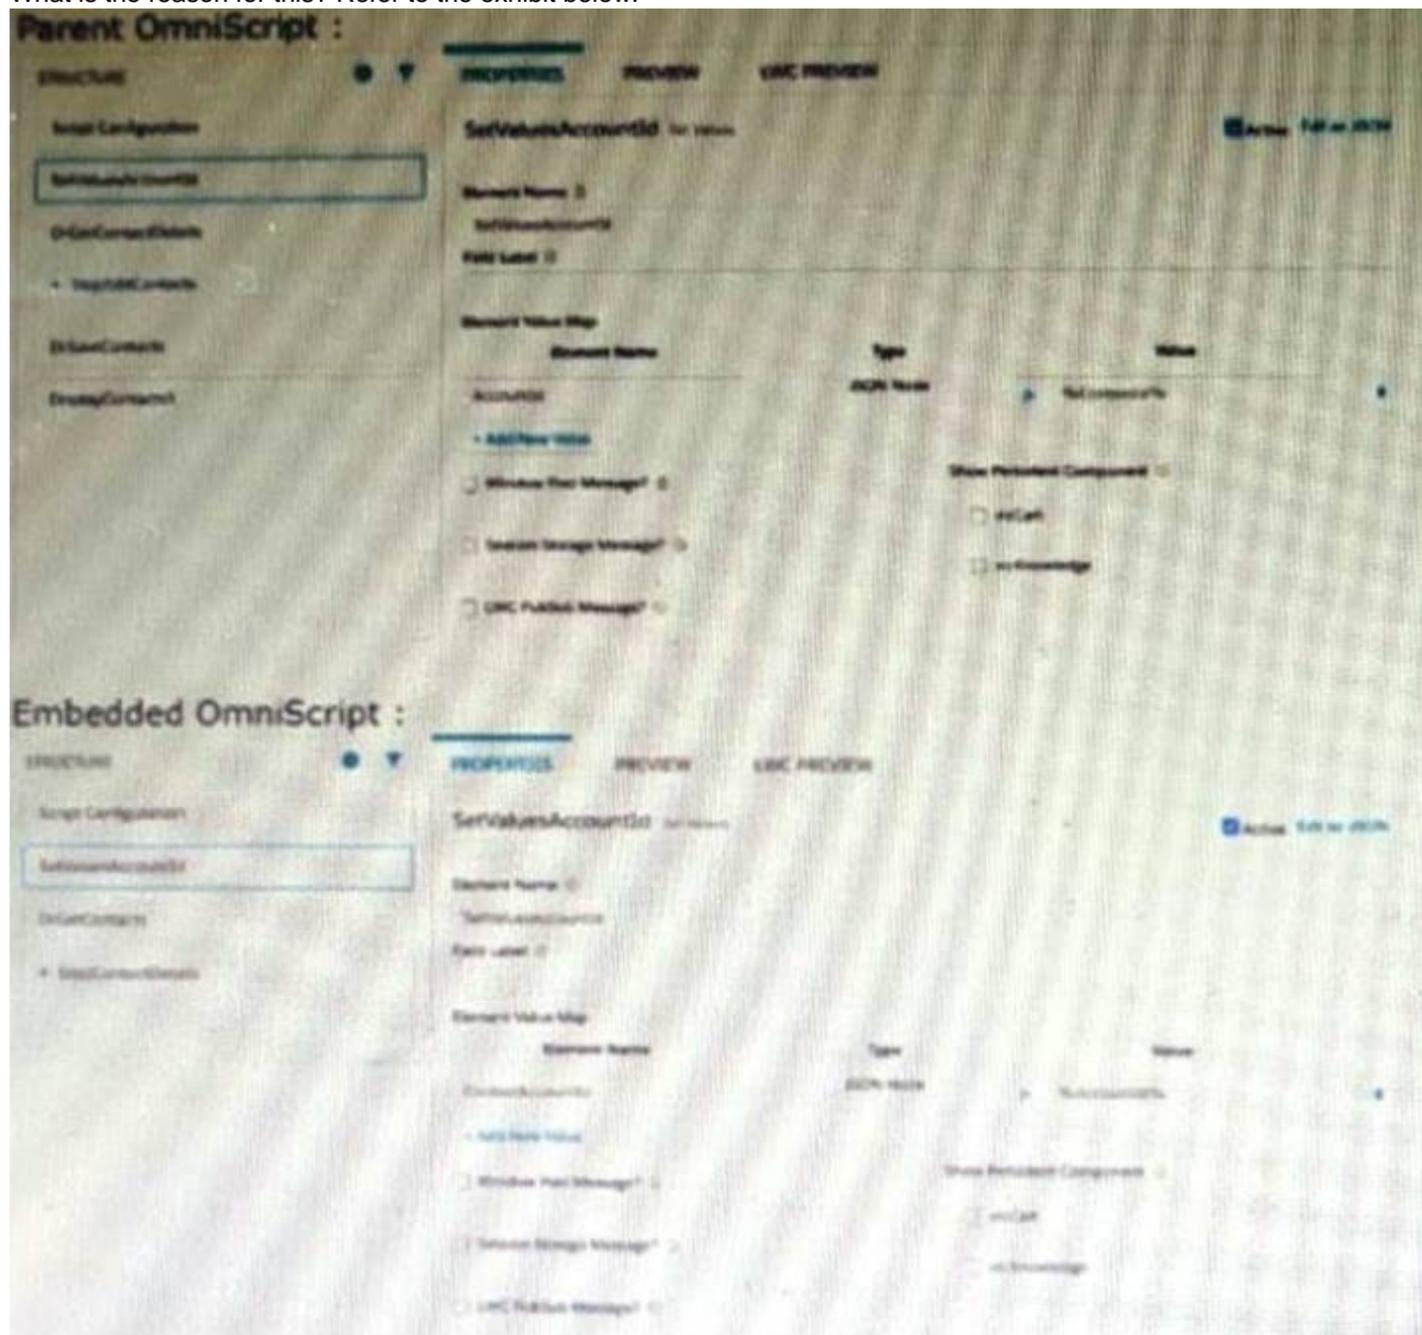


- A. The WLC PubSub Messge flag in the Set Values action of the parent OmniScript has not been set.
- B. The flag passData.JSON in the parent OmniScript in not configured correctly.
- C. A developer failed to include a Navigate Action Element to pass data from the parent OmniScript.
- D. Both parent and embedded OmniScripts have thesame element name for the Set Values element.

Answer: C

NEW QUESTION 7

Refer to the exhibit below.

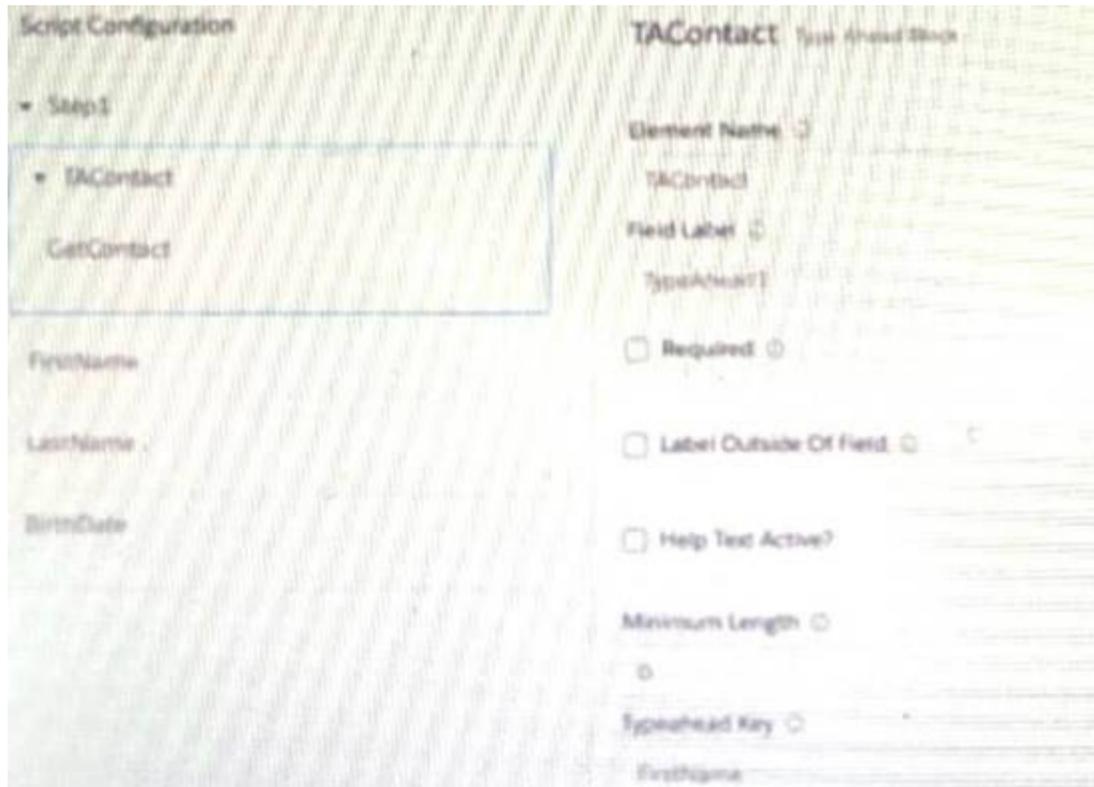

What is the reason that the fields fail to display the fetched data?

- A. Lookup Mode is selected in the properties of the Type Ahead Block.
- B. FirstName, LastName, and BirthDate are not placed inside the Type Ahead Block.
- C. The typeHead key is not in the correct format.
- D. Use Data JSON is Not selected in the properties of the Type Ahead Block.

Answer: B

NEW QUESTION 8


A developer creates a FlexCard with five state elements. For of the states have a condition. To test the FlexCard, the developer previews it using sample data that causes two of the states to have true conditions. In this scenario, how will the developer know which state will display?

- A. The first state with true conditions sequence closest to the top of the FlexCard canvas will display.
- B. The first state with true nested condition, regardless of sequence in the FlexCard canvas, will display
- C. The state sequenced first in the FlexCard canvas will display.
- D. The first state with a true AND condition, regardless of sequence in the FlexCard canvas, will display.

Answer: C

NEW QUESTION 9

..... configure Additional input to send exactly the same data?
 Assume that the develop checked Send Only Additional input.

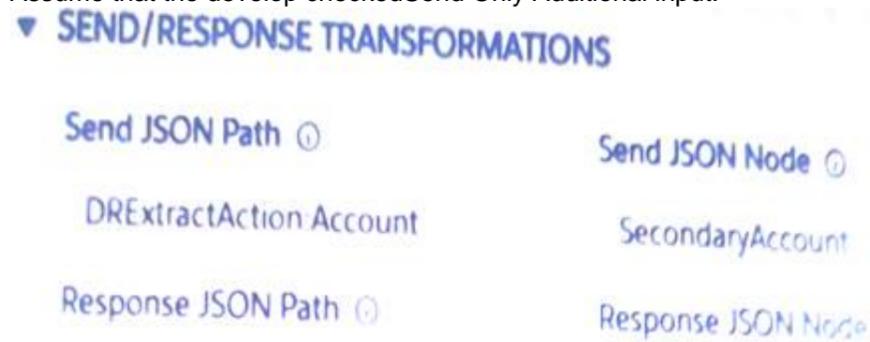

A)

Key	Value
SecondaryAccount	DRExtractAction:Account

B)

Key	Value
DRExtractAction:Account	SecondaryAccount

C)

Key	Value
DRExtractAction:Account	SecondaryAccount

D)

Key	Value
SecondaryAccount	DRExtractAction:Account

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 10

A developer needs to build a DataRaptor Transform to send current weather to both an OmniScript Card Layout. Which of these samples would be valid for the Expected Output JSON?

A)

```
{
  "Current:TempF": 53.1,
  "Current:CityState": "Baltimore, MD",
  "Current:TempF": 14.6
}
```

B)

```
{
  "current": {
    "TempF": 53.1,
    "CityState": "Baltimore, MD",
    "TempC": 14.6
  }
}
```

C)

```
<root>
  <Current>
    <TempF>53.1</TempF>
    <CityState>Baltimore, MD</CityState>
    <TempC>14.6</TempC>
  </Current>
</root>
```

D)

```
{
  "current": {
    "TempF": 53.1,
    "CityState": "Baltimore, MD",
    "TempC": 14.6
  }
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 10


A developer needs to configure a calculation procedure to calculate the sum of the entire Baseprice. What is the most efficient way for the developer to meet this requirement?

- A. Create a Postprocessor apex class to calculate the sum.
- B. Add an Aggregation Step as SUM (BasePrice)
- C. Add A Calculation Step as SUM (BasePrice).
- D. Create a Preprocessor class to calculate the sum

Answer: B

NEW QUESTION 14

A developer needs to transform contact data into a JSON array.

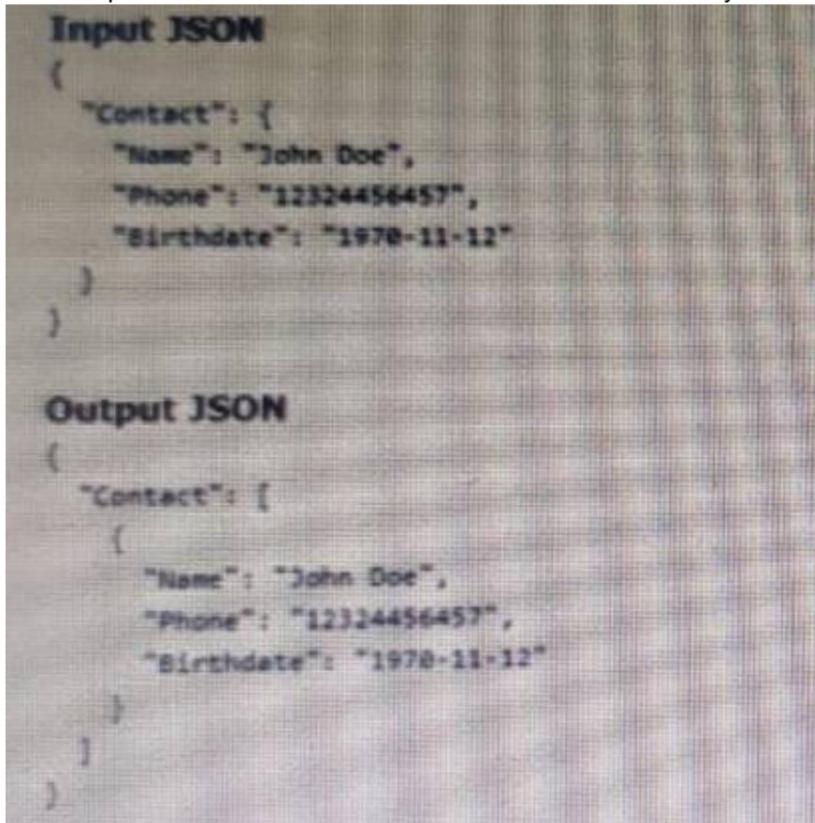

Given the input JSON shown above, what are two ways a developer could configure a DATARaptor transform to achieve the expected Output JSON? Choose 2 answers

- A. Use a formula LIST(Contact), and add the output of the formula as the input in the Transform tab.
- B. Set the Input JSON path as List(Contact) and the OutputJSON Path as Contact.
- C. Set the Input JSON Path as Contact the out JSON Path as contact and output Data type as List.
- D. Set the input JSON Path as Contact and the OutPut JSON Path as List (Contact)

Answer: BC

NEW QUESTION 18

A developer is creating a FlexCard for a new Community page. The FlexCard will display case information along with action to close the case and update the case. And it will be styled using the Community's theme.

What must be developer do to configure the FlexCard for deployment in a Community?

- A. Add the FlexCard's API name to FlexCard Player component
- B. Set the Target property in publish Options to Communitypage"
- C. Configure the Component visibility in the custom Component.
- D. Set the Developer property in Card Configuration to "Community"

Answer: B

NEW QUESTION 20

A company wants to allow agents to send customers a quote for signature. The quote is a document created using a DocuSign template that has been prefilled with all of the quote details. The document will be emailed to one or more recipients for signature.

How should a developer configure this functionality in an OmniScript?

- A. DocuSign Envelope Action
- B. PDF Acwm
- C. DocuSign Signature Action
- D. Email Action

Answer: C

NEW QUESTION 23

Refer to the exhibit.



A)

```

"Step1": {
  "Block1": {
    "Text1": "Text",
    "Block2": {
      "Telephone1": "1234567890",
      "Checkbox1": false
    }
  },
  "Block3": {
    "Multi-select1": "Value A;Value B"
  }
}

```

B)

```

"Step1": {
  "Block1": {
    "Text1": "Text",
    "Telephone1": "1234567890",
    "Block2": {
      "Checkbox1": false
    }
  },
  "Block3": {
    "Multi-select1": "Value A;Value B"
  }
}

```

- A. Option A
- B. Option B

Answer: A

NEW QUESTION 24

A developer creates an OmniScript to update billing information. After analyzing the different types of customer interactions that occur at the company, the developer determines updating billing information should be included in the majority of customer interactions, which are represented by more than 20 different FlexCards.

What is the most efficient way for the developer to configure the action that invokes the OmniScript?

- A. As an OS Action
- B. As a Custom Action
- C. As an OmniStudio Action
- D. As a Lightning Action

Answer: C

NEW QUESTION 27

A developer configure a Flexcard with a DataRaptor data source that uses the params.id as an. When the developer clicks Views Data on the FlexCard, valid datadisplays. However, when the developer previews the layout, the FlexCard does not display. What could cause this error?

Choose 2 answers

- A. The Data Node field for the FlexCard is empty.
- B. The RecordId in the Test Data Source settings ins for the wrong record type.
- C. The attribute haven't been configured to pass the data to the fields.
- D. There is not Salesforce record for the FlexCard based on the RecordId in the layout's Test Data Source Settings.

Answer: BC

NEW QUESTION 30

A developer creates a DataRaptor Extract to retrieve data to pass to anexternal service. The external service expects the field value to be integer. However, the DataRaptor is sending it as a string.

Which action can the developer take to fix this?

- A. In the DataRaptor Output tab, select the Output Data Type of that field toInteger.
- B. In the DataRaptor Output tab, enter the default value as 0 on the field.
- C. In the DataRaptor Extract tab, set the Input Data Type field to Integer.
- D. In the DataRaptor Formula tab, define a formula using the function TOINTEGER and use theformula as output.

Answer: A

NEW QUESTION 35

The OmniScript must retrieve device details stored in the Asset object and then call an external system to send troubleshooting commands via REST API to the device.

Which two OmniScript elements should the developer use to configure this functionality?

- A. DataRaptor Extract Action
- B. REST API Action
- C. Navigation Action
- D. SOQL Action
- E. HTTP Action

Answer: AE

NEW QUESTION 37

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual OmniStudio-Developer Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the OmniStudio-Developer Product From:

<https://www.2passeasy.com/dumps/OmniStudio-Developer/>

Money Back Guarantee

OmniStudio-Developer Practice Exam Features:

- * OmniStudio-Developer Questions and Answers Updated Frequently
- * OmniStudio-Developer Practice Questions Verified by Expert Senior Certified Staff
- * OmniStudio-Developer Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * OmniStudio-Developer Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year