

# Google

## Exam Questions Associate-Cloud-Engineer

Google Cloud Certified - Associate Cloud Engineer



**NEW QUESTION 1**

Your organization uses G Suite for communication and collaboration. All users in your organization have a G Suite account. You want to grant some G Suite users access to your Cloud Platform project. What should you do?

- A. Enable Cloud Identity in the GCP Console for your domain.
- B. Grant them the required IAM roles using their G Suite email address.
- C. Create a CSV sheet with all users' email addresses
- D. Use the gcloud command line tool to convert them into Google Cloud Platform accounts.
- E. In the G Suite console, add the users to a special group called cloud-console-users@yourdomain.com. Rely on the default behavior of the Cloud Platform to grant users access if they are members of this group.

**Answer:** B

**NEW QUESTION 2**

You have just created a new project which will be used to deploy a globally distributed application. You will use Cloud Spanner for data storage. You want to create a Cloud Spanner instance. You want to perform the first step in preparation of creating the instance. What should you do?

- A. Grant yourself the IAM role of Cloud Spanner Admin
- B. Create a new VPC network with subnetworks in all desired regions
- C. Configure your Cloud Spanner instance to be multi-regional
- D. Enable the Cloud Spanner API

**Answer:** C

**NEW QUESTION 3**

Your managed instance group raised an alert stating that new instance creation has failed to create new instances. You need to maintain the number of running instances specified by the template to be able to process expected application traffic. What should you do?

- A. Create an instance template that contains valid syntax which will be used by the instance group
- B. Delete any persistent disks with the same name as instance names.
- C. Create an instance template that contains valid syntax that will be used by the instance group
- D. Verify that the instance name and persistent disk name values are not the same in the template.
- E. Verify that the instance template being used by the instance group contains valid syntax
- F. Delete any persistent disks with the same name as instance name
- G. Set the disks.autoDelete property to true in the instance template.
- H. Delete the current instance template and replace it with a new instance template
- I. Verify that the instance name and persistent disk name values are not the same in the template
- J. Set the disks.autoDelete property to true in the instance template.

**Answer:** C

**NEW QUESTION 4**

You are running multiple VPC-native Google Kubernetes Engine clusters in the same subnet. The IPs available for the nodes are exhausted, and you want to ensure that the clusters can grow in nodes when needed. What should you do?

- A. Create a new subnet in the same region as the subnet being used.
- B. Add an alias IP range to the subnet used by the GKE clusters.
- C. Create a new VPC, and set up VPC peering with the existing VPC.
- D. Expand the CIDR range of the relevant subnet for the cluster.

**Answer:** C

**Explanation:**

To create a VPC peering connection, first create a request to peer with another VPC.

**NEW QUESTION 5**

You manage an App Engine Service that aggregates and visualizes data from BigQuery. The application is deployed with the default App Engine Service account. The data that needs to be visualized resides in a different project managed by another team. You do not have access to this project, but you want your application to be able to read data from the BigQuery dataset. What should you do?

- A. Ask the other team to grant your default App Engine Service account the role of BigQuery Job User.
- B. Ask the other team to grant your default App Engine Service account the role of BigQuery Data Viewer.
- C. In Cloud IAM of your project, ensure that the default App Engine service account has the role of BigQuery Data Viewer.
- D. In Cloud IAM of your project, grant a newly created service account from the other team the role of BigQuery Job User in your project.

**Answer:** C

**Explanation:**

The Owner, Editor, and Viewer primitive roles include the BigQuery Admin (roles/bigquery.dataOwner), BigQuery Data Editor (roles/bigquery.dataEditor), and BigQuery Data Viewer (roles/bigquery.dataViewer) roles, respectively. This means the Owner, Editor, and Viewer primitive roles have BigQuery access as defined for the respective BigQuery roles.

**NEW QUESTION 6**

You are developing a new application and are looking for a Jenkins installation to build and deploy your source code. You want to automate the installation as quickly and easily as possible. What should you do?

- A. Deploy Jenkins through the Google Cloud Marketplace.
- B. Create a new Compute Engine instance.
- C. Run the Jenkins executable.
- D. Create a new Kubernetes Engine cluster.
- E. Create a deployment for the Jenkins image.
- F. Create an instance template with the Jenkins executable.
- G. Create a managed instance group with this template.

**Answer:** A

#### NEW QUESTION 7

You need to immediately change the storage class of an existing Google Cloud bucket. You need to reduce service cost for infrequently accessed files stored in that bucket and for all files that will be added to that bucket in the future. What should you do?

- A. Use the gsutil to rewrite the storage class for the bucket. Change the default storage class for the bucket.
- B. Use the gsutil to rewrite the storage class for the bucket. Set up Object Lifecycle management on the bucket.
- C. Create a new bucket and change the default storage class for the bucket. Set up Object Lifecycle management on the new bucket.
- D. Create a new bucket and change the default storage class for the bucket. Import the files from the previous bucket into the new bucket.

**Answer:** B

#### NEW QUESTION 8

You have a single binary application that you want to run on Google Cloud Platform. You decided to automatically scale the application based on underlying infrastructure CPU usage. Your organizational policies require you to use virtual machines directly. You need to ensure that the application scaling is operationally efficient and completed as quickly as possible. What should you do?

- A. Create a Google Kubernetes Engine cluster, and use horizontal pod autoscaling to scale the application.
- B. Create an instance template, and use the template in a managed instance group with autoscaling configured.
- C. Create an instance template, and use the template in a managed instance group that scales up and down based on the time of day.
- D. Use a set of third-party tools to build automation around scaling the application up and down, based on Stackdriver CPU usage monitoring.

**Answer:** A

#### NEW QUESTION 9

You have a development project with appropriate IAM roles defined. You are creating a production project and want to have the same IAM roles on the new project, using the fewest possible steps. What should you do?

- A. Use `gcloud iam roles copy` and specify the production project as the destination project.
- B. Use `gcloud iam roles copy` and specify your organization as the destination organization.
- C. In the Google Cloud Platform Console, use the 'create role from role' functionality.
- D. In the Google Cloud Platform Console, use the 'create role' functionality and select all applicable permissions.

**Answer:** B

#### NEW QUESTION 10

Your projects incurred more costs than you expected last month. Your research reveals that a development GKE container emitted a huge number of logs, which resulted in higher costs. You want to disable the logs quickly using the minimum number of steps. What should you do?

- A. 1. Go to the Logs ingestion window in Stackdriver Logging, and disable the log source for the GKE container resource.
- B. 1. Go to the Logs ingestion window in Stackdriver Logging, and disable the log source for the GKE Cluster Operations resource.
- C. 1. Go to the GKE console, and delete existing clusters. 2. Recreate a new cluster. 3. Clear the option to enable legacy Stackdriver Logging.
- D. 1. Go to the GKE console, and delete existing clusters. 2. Recreate a new cluster. 3. Clear the option to enable legacy Stackdriver Monitoring.

**Answer:** A

#### NEW QUESTION 10

You have deployed an application on a single Compute Engine instance. The application writes logs to disk. Users start reporting errors with the application. You want to diagnose the problem. What should you do?

- A. Navigate to Cloud Logging and view the application logs.
- B. Connect to the instance's serial console and read the application logs.
- C. Configure a Health Check on the instance and set a Low Healthy Threshold value.
- D. Install and configure the Cloud Logging Agent and view the logs from Cloud Logging.

**Answer:** D

#### NEW QUESTION 15

You need to set up permissions for a set of Compute Engine instances to enable them to write data into a particular Cloud Storage bucket. You want to follow Google-recommended practices. What should you do?

- A. Create a service account with an access scope.
- B. Use the access scope 'https://www.googleapis.com/auth/devstorage.write\_only'.
- C. Create a service account with an access scope.
- D. Use the access scope 'https://www.googleapis.com/auth/cloud-platform'.
- E. Create a service account and add it to the IAM role 'storage.objectCreator' for that bucket.
- F. Create a service account and add it to the IAM role 'storage.objectAdmin' for that bucket.

**Answer: B**

#### NEW QUESTION 16

You have an application that uses Cloud Spanner as a backend database. The application has a very predictable traffic pattern. You want to automatically scale up or down the number of Spanner nodes depending on traffic. What should you do?

- A. Create a cron job that runs on a scheduled basis to review stackdriver monitoring metrics, and then resize the Spanner instance accordingly.
- B. Create a Stackdriver alerting policy to send an alert to oncall SRE emails when Cloud Spanner CPU exceeds the threshold
- C. SREs would scale resources up or down accordingly.
- D. Create a Stackdriver alerting policy to send an alert to Google Cloud Support email when Cloud Spanner CPU exceeds your threshold
- E. Google support would scale resources up or down accordingly.
- F. Create a Stackdriver alerting policy to send an alert to webhook when Cloud Spanner CPU is over or under your threshold
- G. Create a Cloud Function that listens to HTTP and resizes Spanner resources accordingly.

**Answer: D**

#### NEW QUESTION 21

Your company has an existing GCP organization with hundreds of projects and a billing account. Your company recently acquired another company that also has hundreds of projects and its own billing account. You would like to consolidate all GCP costs of both GCP organizations onto a single invoice. You would like to consolidate all costs as of tomorrow. What should you do?

- A. Link the acquired company's projects to your company's billing account.
- B. Configure the acquired company's billing account and your company's billing account to export the billing data into the same BigQuery dataset.
- C. Migrate the acquired company's projects into your company's GCP organization
- D. Link the migrated projects to your company's billing account.
- E. Create a new GCP organization and a new billing account
- F. Migrate the acquired company's projects and your company's projects into the new GCP organization and link the projects to the new billing account.

**Answer: D**

#### NEW QUESTION 26

Your company is moving from an on-premises environment to Google Cloud Platform (GCP). You have multiple development teams that use Cassandra environments as backend databases. They all need a development environment that is isolated from other Cassandra instances. You want to move to GCP quickly and with minimal support effort. What should you do?

- A. \* 1. Build an instruction guide to install Cassandra on GCP.\* 2. Make the instruction guide accessible to your developers.
- B. \* 1. Advise your developers to go to Cloud Marketplace.\* 2. Ask the developers to launch a Cassandra image for their development work.
- C. \* 1. Build a Cassandra Compute Engine instance and take a snapshot of it.\* 2. Use the snapshot to create instances for your developers.
- D. \* 1. Build a Cassandra Compute Engine instance and take a snapshot of it.\* 2. Upload the snapshot to Cloud Storage and make it accessible to your developers.\* 3. Build instructions to create a Compute Engine instance from the snapshot so that developers can do it themselves.

**Answer: D**

#### NEW QUESTION 28

You are asked to set up application performance monitoring on Google Cloud projects A, B, and C as a single pane of glass. You want to monitor CPU, memory, and disk. What should you do?

- A. Enable API and then share charts from project A, B, and C.
- B. Enable API and then give the metrics.reader role to projects A, B, and C.
- C. Enable API and then use default dashboards to view all projects in sequence.
- D. Enable API, create a workspace under project A, and then add project B and C.

**Answer: D**

#### NEW QUESTION 32

You are using Data Studio to visualize a table from your data warehouse that is built on top of BigQuery. Data is appended to the data warehouse during the day. At night, the daily summary is recalculated by overwriting the table. You just noticed that the charts in Data Studio are broken, and you want to analyze the problem. What should you do?

- A. Use the BigQuery interface to review the nightly Job and look for any errors
- B. Review the Error Reporting page in the Cloud Console to find any errors.
- C. In Cloud Logging create a filter for your Data Studio report
- D. Use Cloud Debugger to find out why the data was not refreshed correctly

**Answer: D**

#### NEW QUESTION 37

You have successfully created a development environment in a project for an application. This application uses Compute Engine and Cloud SQL. Now, you need to create a production environment for this application.

The security team has forbidden the existence of network routes between these 2 environments, and asks you to follow Google-recommended practices. What should you do?

- A. Create a new project, enable the Compute Engine and Cloud SQL APIs in that project, and replicate the setup you have created in the development environment.
- B. Create a new production subnet in the existing VPC and a new production Cloud SQL instance in your existing project, and deploy your application using those resources.
- C. Create a new project, modify your existing VPC to be a Shared VPC, share that VPC with your new project, and replicate the setup you have in the

development environment in that new project, in the Shared VPC.

- D. Ask the security team to grant you the Project Editor role in an existing production project used by another division of your company.
- E. Once they grant you that role, replicate the setup you have in the development environment in that project.

**Answer:** A

#### NEW QUESTION 42

You will have several applications running on different Compute Engine instances in the same project. You want to specify at a more granular level the service account each instance uses when calling Google Cloud APIs. What should you do?

- A. When creating the instances, specify a Service Account for each instance
- B. When creating the instances, assign the name of each Service Account as instance metadata
- C. After starting the instances, use `gcloud compute instances update` to specify a Service Account for each instance
- D. After starting the instances, use `gcloud compute instances update` to assign the name of the relevant Service Account as instance metadata

**Answer:** C

#### NEW QUESTION 43

You have deployed multiple Linux instances on Compute Engine. You plan on adding more instances in the coming weeks. You want to be able to access all of these instances through your SSH client over the Internet without having to configure specific access on the existing and new instances. You do not want the Compute Engine instances to have a public IP. What should you do?

- A. Configure Cloud Identity-Aware Proxy (or HTTPS resources)
- B. Configure Cloud Identity-Aware Proxy for SSH and TCP resources.
- C. Create an SSH keypair and store the public key as a project-wide SSH Key
- D. Create an SSH keypair and store the private key as a project-wide SSH Key

**Answer:** C

#### NEW QUESTION 48

Your company uses BigQuery for data warehousing. Over time, many different business units in your company have created 1000+ datasets across hundreds of projects. Your CIO wants you to examine all datasets to find tables that contain an `employee_ssn` column. You want to minimize effort in performing this task. What should you do?

- A. Go to Data Catalog and search for `employee_ssn` in the search box.
- B. Write a shell script that uses the `bq` command line tool to loop through all the projects in your organization.
- C. Write a script that loops through all the projects in your organization and runs a query on `INFORMATION_SCHEMA.COLUMNS` view to find the `employee_ssn` column.
- D. Write a Cloud Dataflow job that loops through all the projects in your organization and runs a query on `INFORMATION_SCHEMA.COLUMNS` view to find `employee_ssn` column.

**Answer:** D

#### NEW QUESTION 51

You built an application on your development laptop that uses Google Cloud services. Your application uses Application Default Credentials for authentication and works fine on your development laptop. You want to migrate this application to a Compute Engine virtual machine (VM) and set up authentication using Google-recommended practices and minimal changes. What should you do?

- A. Assign appropriate access for Google services to the service account used by the Compute Engine VM.
- B. Create a service account with appropriate access for Google services, and configure the application to use this account.
- C. Store credentials for service accounts with appropriate access for Google services in a config file, and deploy this config file with your application.
- D. Store credentials for your user account with appropriate access for Google services in a config file, and deploy this config file with your application.

**Answer:** B

#### NEW QUESTION 56

Your development team needs a new Jenkins server for their project. You need to deploy the server using the fewest steps possible. What should you do?

- A. Download and deploy the Jenkins Java WAR to App Engine Standard.
- B. Create a new Compute Engine instance and install Jenkins through the command line interface.
- C. Create a Kubernetes cluster on Compute Engine and create a deployment with the Jenkins Docker image.
- D. Use GCP Marketplace to launch the Jenkins solution.

**Answer:** D

#### NEW QUESTION 59

You have an object in a Cloud Storage bucket that you want to share with an external company. The object contains sensitive data. You want access to the content to be removed after four hours. The external company does not have a Google account to which you can grant specific user-based access privileges. You want to use the most secure method that requires the fewest steps. What should you do?

- A. Create a signed URL with a four-hour expiration and share the URL with the company.
- B. Set object access to 'public' and use object lifecycle management to remove the object after four hours.
- C. Configure the storage bucket as a static website and furnish the object's URL to the company
- D. Delete the object from the storage bucket after four hours.
- E. Create a new Cloud Storage bucket specifically for the external company to access
- F. Copy the object to that bucket
- G. Delete the bucket after four hours have passed.



**Answer:** A

#### NEW QUESTION 62

You deployed an LDAP server on Compute Engine that is reachable via TLS through port 636 using UDP. You want to make sure it is reachable by clients over that port. What should you do?

- A. Add the network tag allow-udp-636 to the VM instance running the LDAP server.
- B. Create a route called allow-udp-636 and set the next hop to be the VM instance running the LDAP server.
- C. Add a network tag of your choice to the instance
- D. Create a firewall rule to allow ingress on UDP port 636 for that network tag.
- E. Add a network tag of your choice to the instance running the LDAP serve
- F. Create a firewall rule to allow egress on UDP port 636 for that network tag.

**Answer:** C

#### NEW QUESTION 66

Your company runs its Linux workloads on Compute Engine instances. Your company will be working with a new operations partner that does not use Google Accounts. You need to grant access to the instances to your operations partner so they can maintain the installed tooling. What should you do?

- A. Enable Cloud IAP for the Compute Engine instances, and add the operations partner as a Cloud IAP Tunnel User.
- B. Tag all the instances with the same network ta
- C. Create a firewall rule in the VPC to grant TCP access on port 22 for traffic from the operations partner to instances with the network tag.
- D. Set up Cloud VPN between your Google Cloud VPC and the internal network of the operations partner.
- E. Ask the operations partner to generate SSH key pairs, and add the public keys to the VM instances.

**Answer:** B

#### NEW QUESTION 69

You need to assign a Cloud Identity and Access Management (Cloud IAM) role to an external auditor. The auditor needs to have permissions to review your Google Cloud Platform (GCP) Audit Logs and also to review your Data Access logs. What should you do?

- A. Assign the auditor the IAM role roles/logging.privateLogViewe
- B. Perform the export of logs to Cloud Storage.
- C. Assign the auditor the IAM role roles/logging.privateLogViewe
- D. Direct the auditor to also review the logs for changes to Cloud IAM policy.
- E. Assign the auditor's IAM user to a custom role that has logging.privateLogEntries.list permissio
- F. Perform the export of logs to Cloud Storage.
- G. Assign the auditor's IAM user to a custom role that has logging.privateLogEntries.list permissio
- H. Direct the auditor to also review the logs for changes to Cloud IAM policy.

**Answer:** C

#### NEW QUESTION 74

You want to configure autohealing for network load balancing for a group of Compute Engine instances that run in multiple zones, using the fewest possible steps. You need to configure re-creation of VMs if they are unresponsive after 3 attempts of 10 seconds each. What should you do?

- A. Create an HTTP load balancer with a backend configuration that references an existing instance group.Set the health check to healthy (HTTP).
- B. Create an HTTP load balancer with a backend configuration that references an existing instance group.Define a balancing mode and set the maximum RPS to 10.
- C. Create a managed instance grou
- D. Set the Autohealing health check to healthy (HTTP).
- E. Create a managed instance grou
- F. Verify that the autoscaling setting is on.

**Answer:** A

#### NEW QUESTION 78

You create a Deployment with 2 replicas in a Google Kubernetes Engine cluster that has a single preemptible node pool. After a few minutes, you use kubectl to examine the status of your Pod and observe that one of them is still in Pending status:

```
$ kubectl get pods -l app=myapp
NAME                                READY    STATUS    RESTART  AGE
myapp-deployment-58ddb995-lp86m    0/1     Pending   0        9m
myapp-deployment-58ddb995-qjpkg    1/1     Running   0        9m
```

What is the most likely cause?

- A. The pending Pod's resource requests are too large to fit on a single node of the cluster.
- B. Too many Pods are already running in the cluster, and there are not enough resources left to schedule the pending Pod.
- C. The node pool is configured with a service account that does not have permission to pull the container image used by the pending Pod.
- D. The pending Pod was originally scheduled on a node that has been preempted between the creation of the Deployment and your verification of the Pods' statu
- E. It is currently being rescheduled on a new node.

**Answer:** B

**NEW QUESTION 81**

You are using Deployment Manager to create a Google Kubernetes Engine cluster. Using the same Deployment Manager deployment, you also want to create a DaemonSet in the kube-system namespace of the cluster. You want a solution that uses the fewest possible services. What should you do?

- A. Add the cluster's API as a new Type Provider in Deployment Manager, and use the new type to create the DaemonSet.
- B. Use the Deployment Manager Runtime Configurator to create a new Config resource that contains the DaemonSet definition.
- C. With Deployment Manager, create a Compute Engine instance with a startup script that uses kubectl to create the DaemonSet.
- D. In the cluster's definition in Deployment Manager, add a metadata that has kube-system as key and the DaemonSet manifest as value.

**Answer: C**

**NEW QUESTION 83**

You created a Google Cloud Platform project with an App Engine application inside the project. You initially configured the application to be served from the us-central region. Now you want the application to be served from the asia-northeast1 region. What should you do?

- A. Change the default region property setting in the existing GCP project to asia-northeast1.
- B. Change the region property setting in the existing App Engine application from us-central to asia-northeast1.
- C. Create a second App Engine application in the existing GCP project and specify asia-northeast1 as the region to serve your application.
- D. Create a new GCP project and create an App Engine application inside this new project.
- E. Specify asia-northeast1 as the region to serve your application.

**Answer: C**

**NEW QUESTION 87**

You have a Compute Engine instance hosting an application used between 9 AM and 6 PM on weekdays. You want to back up this instance daily for disaster recovery purposes. You want to keep the backups for 30 days. You want the Google-recommended solution with the least management overhead and the least number of services. What should you do?

- A. \* 1. Update your instances' metadata to add the following value: snapshot-schedule: 0 1 \* \* \* \* 2. Update your instances' metadata to add the following value: snapshot-retention: 30
- B. \* 1. In the Cloud Console, go to the Compute Engine Disks page and select your instance's disk.\* 2. In the Snapshot Schedule section, select Create Schedule and configure the following parameters:--Schedule frequency: Daily--Start time: 1:00 AM -- 2:00 AM--Autodelete snapshots after 30 days
- C. \* 1. Create a Cloud Function that creates a snapshot of your instance's disk.\* 2. Create a Cloud Function that deletes snapshots that are older than 30 days
- D. 3. Use Cloud Scheduler to trigger both Cloud Functions daily at 1:00 AM.
- E. \* 1. Create a bash script in the instance that copies the content of the disk to Cloud Storage.\* 2. Create a bash script in the instance that deletes data older than 30 days in the backup Cloud Storage bucket.\* 3. Configure the instance's crontab to execute these scripts daily at 1:00 AM.

**Answer: B**

**NEW QUESTION 90**

You manage three Google Cloud projects with the Cloud Monitoring API enabled. You want to follow Google-recommended practices to visualize CPU and network metrics for all three projects together. What should you do?

- A. \* 1. Create a Cloud Monitoring Dashboard\* 2. Collect metrics and publish them into the Pub/Sub topics 3. Add CPU and network Charts (or each of the three projects)
- B. \* 1. Create a Cloud Monitoring Dashboard.\* 2. Select the CPU and Network metrics from the three projects.\* 3. Add CPU and network Charts to each of the three projects.
- C. \* 1 Create a Service Account and apply roles/viewer on the three projects\* 2. Collect metrics and publish them to the Cloud Monitoring API\* 3. Add CPU and network Charts for each of the three projects.
- D. \* 1. Create a fourth Google Cloud project\* 2 Create a Cloud Workspace from the fourth project and add the other three projects

**Answer: B**

**NEW QUESTION 95**

Your organization has three existing Google Cloud projects. You need to bill the Marketing department for only their Google Cloud services for a new initiative within their group. What should you do?

- A. \* 1. Verify that you are assigned the Billing Administrator IAM role for your organization's Google Cloud Project for the Marketing department\* 2. Link the new project to a Marketing Billing Account
- B. \* 1. Verify that you are assigned the Billing Administrator IAM role for your organization's Google Cloud account\* 2. Create a new Google Cloud Project for the Marketing department\* 3. Set the default key-value project labels to department marketing for all services in this project
- C. \* 1. Verify that you are assigned the Organization Administrator IAM role for your organization's Google Cloud account\* 2. Create a new Google Cloud Project for the Marketing department 3. Link the new project to a Marketing Billing Account.
- D. \* 1. Verify that you are assigned the Organization Administrator IAM role for your organization's Google Cloud account\* 2. Create a new Google Cloud Project for the Marketing department\* 3. Set the default key value project labels to department marketing for all services in this project

**Answer: A**

**NEW QUESTION 98**

Your company's infrastructure is on-premises, but all machines are running at maximum capacity. You want to burst to Google Cloud. The workloads on Google Cloud must be able to directly communicate to the workloads on-premises using a private IP range. What should you do?

- A. In Google Cloud, configure the VPC as a host for Shared VPC.
- B. In Google Cloud, configure the VPC for VPC Network Peering.
- C. Create bastion hosts both in your on-premises environment and on Google Cloud.
- D. Configure both as proxy servers using their public IP addresses.
- E. Set up Cloud VPN between the infrastructure on-premises and Google Cloud.

**Answer:** B

#### NEW QUESTION 102

Every employee of your company has a Google account. Your operational team needs to manage a large number of instances on Compute Engine. Each member of this team needs only administrative access to the servers. Your security team wants to ensure that the deployment of credentials is operationally efficient and must be able to determine who accessed a given instance. What should you do?

- A. Generate a new SSH key pair
- B. Give the private key to each member of your team
- C. Configure the public key in the metadata of each instance.
- D. Ask each member of the team to generate a new SSH key pair and to send you their public key
- E. Use a configuration management tool to deploy those keys on each instance.
- F. Ask each member of the team to generate a new SSH key pair and to add the public key to their Google account
- G. Grant the "compute.osAdminLogin" role to the Google group corresponding to this team.
- H. Generate a new SSH key pair
- I. Give the private key to each member of your team
- J. Configure the public key as a project-wide public SSH key in your Cloud Platform project and allow project-wide public SSH keys on each instance.

**Answer:** C

#### Explanation:

<https://cloud.google.com/compute/docs/instances/managing-instance-access>

#### NEW QUESTION 107

An application generates daily reports in a Compute Engine virtual machine (VM). The VM is in the project corp-iot-insights. Your team operates only in the project corp-aggregate-reports and needs a copy of the daily exports in the bucket corp-aggregate-reports-storage. You want to configure access so that the daily reports from the VM are available in the bucket corp-aggregate-reports-storage and use as few steps as possible while following Google-recommended practices. What should you do?

- A. Move both projects under the same folder.
- B. Grant the VM Service Account the role Storage Object Creator on corp-aggregate-reports-storage.
- C. Create a Shared VPC network between both projects
- D. Grant the VM Service Account the role Storage Object Creator on corp-iot-insights.
- E. Make corp-aggregate-reports-storage public and create a folder with a pseudo-randomized suffix name. Share the folder with the IoT team.

**Answer:** D

#### NEW QUESTION 109

You received a JSON file that contained a private key of a Service Account in order to get access to several resources in a Google Cloud project. You downloaded and installed the Cloud SDK and want to use this private key for authentication and authorization when performing gcloud commands. What should you do?

- A. Use the command gcloud auth login and point it to the private key
- B. Use the command gcloud auth activate-service-account and point it to the private key
- C. Place the private key file in the installation directory of the Cloud SDK and rename it to "credentials.json"
- D. Place the private key file in your home directory and rename it to "GOOGLE\_APPLICATION\_CREDENTIALS".

**Answer:** A

#### NEW QUESTION 110

You want to deploy an application on Cloud Run that processes messages from a Cloud Pub/Sub topic. You want to follow Google-recommended practices. What should you do?

- A. 1. Create a Cloud Function that uses a Cloud Pub/Sub trigger on that topic. 2. Call your application on Cloud Run from the Cloud Function for every message.
- B. 1. Grant the Pub/Sub Subscriber role to the service account used by Cloud Run. 2. Create a Cloud Pub/Sub subscription for that topic. 3. Make your application pull messages from that subscription.
- C. 1. Create a service account. 2. Give the Cloud Run Invoker role to that service account for your Cloud Run application. 3. Create a Cloud Pub/Sub subscription that uses that service account and uses your Cloud Run application as the push endpoint.
- D. 1. Deploy your application on Cloud Run on GKE with the connectivity set to Internal. 2. Create a Cloud Pub/Sub subscription for that topic. 3. In the same Google Kubernetes Engine cluster as your application, deploy a container that takes the messages and sends them to your application.

**Answer:** D

#### NEW QUESTION 111

You need to select and configure compute resources for a set of batch processing jobs. These jobs take around 2 hours to complete and are run nightly. You want to minimize service costs. What should you do?

- A. Select Google Kubernetes Engine
- B. Use a single-node cluster with a small instance type.
- C. Select Google Kubernetes Engine
- D. Use a three-node cluster with micro instance types.
- E. Select Compute Engine
- F. Use preemptible VM instances of the appropriate standard machine type.
- G. Select Compute Engine
- H. Use VM instance types that support micro bursting.

**Answer:** C



**NEW QUESTION 112**

You are given a project with a single virtual private cloud (VPC) and a single subnetwork in the us-central1 region. There is a Compute Engine instance hosting an application in this subnetwork. You need to deploy a new instance in the same project in the europe-west1 region. This new instance needs access to the application. You want to follow Google-recommended practices. What should you do?

- A. 1. Create a subnetwork in the same VPC, in europe-west1.2. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.
- B. 1. Create a VPC and a subnetwork in europe-west1.2. Expose the application with an internal load balancer.3. Create the new instance in the new subnetwork and use the load balancer's address as the endpoint.
- C. 1. Create a subnetwork in the same VPC, in europe-west1.2. Use Cloud VPN to connect the two subnetworks.3. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.
- D. 1. Create a VPC and a subnetwork in europe-west1.2. Peer the 2 VPCs.3. Create the new instance in the new subnetwork and use the first instance's private address as the endpoint.

**Answer: B**

**NEW QUESTION 113**

The core business of your company is to rent out construction equipment at a large scale. All the equipment that is being rented out has been equipped with multiple sensors that send event information every few seconds. These signals can vary from engine status, distance traveled, fuel level, and more. Customers are billed based on the consumption monitored by these sensors. You expect high throughput – up to thousands of events per hour per device – and need to retrieve consistent data based on the time of the event. Storing and retrieving individual signals should be atomic. What should you do?

- A. Create a file in Cloud Storage per device and append new data to that file.
- B. Create a file in Cloud Filestore per device and append new data to that file.
- C. Ingest the data into Datastor
- D. Store data in an entity group based on the device.
- E. Ingest the data into Cloud Bigtabl
- F. Create a row key based on the event timestamp.

**Answer: D**

**NEW QUESTION 117**

You have a large 5-TB AVRO file stored in a Cloud Storage bucket. Your analysts are proficient only in SQL and need access to the data stored in this file. You want to find a cost-effective way to complete their request as soon as possible. What should you do?

- A. Load data in Cloud Datastore and run a SQL query against it.
- B. Create a BigQuery table and load data in BigQuer
- C. Run a SQL query on this table and drop this table after you complete your request.
- D. Create external tables in BigQuery that point to Cloud Storage buckets and run a SQL query on these external tables to complete your request.
- E. Create a Hadoop cluster and copy the AVRO file to NDFS by compressing i
- F. Load the file in a hive table and provide access to your analysts so that they can run SQL queries.

**Answer: C**

**NEW QUESTION 121**

You want to verify the IAM users and roles assigned within a GCP project named my-project. What should you do?

- A. Run gcloud iam roles lis
- B. Review the output section.
- C. Run gcloud iam service-accounts lis
- D. Review the output section.
- E. Navigate to the project and then to the IAM section in the GCP Consol
- F. Review the members and roles.
- G. Navigate to the project and then to the Roles section in the GCP Consol
- H. Review the roles and status.

**Answer: D**

**NEW QUESTION 125**

Your company uses a large number of Google Cloud services centralized in a single project. All teams have specific projects for testing and development. The DevOps team needs access to all of the production services in order to perform their job. You want to prevent Google Cloud product changes from broadening their permissions in the future. You want to follow Google-recommended practices. What should you do?

- A. Grant all members of the DevOps team the role of Project Editor on the organization level.
- B. Grant all members of the DevOps team the role of Project Editor on the production project.
- C. Create a custom role that combines the required permission
- D. Grant the DevOps team the custom role on the production project.
- E. Create a custom role that combines the required permission
- F. Grant the DevOps team the custom role on the organization level.

**Answer: A**

**NEW QUESTION 129**

You want to configure 10 Compute Engine instances for availability when maintenance occurs. Your requirements state that these instances should attempt to automatically restart if they crash. Also, the instances should be highly available including during system maintenance. What should you do?

- A. Create an instance template for the instance
- B. Set the 'Automatic Restart' to o

- C. Set the 'On-host maintenance' to Migrate VM instance
- D. Add the instance template to an instance group.
- E. Create an instance template for the instance
- F. Set 'Automatic Restart' to off
- G. Set 'On-host maintenance' to Terminate VM instance
- H. Add the instance template to an instance group.
- I. Create an instance group for the instance
- J. Set the 'Autohealing' health check to healthy (HTTP).
- K. Create an instance group for the instance
- L. Verify that the 'Advanced creation options' setting for 'do not retry machine creation' is set to off.

**Answer: B**

#### NEW QUESTION 134

You need to create a new billing account and then link it with an existing Google Cloud Platform project. What should you do?

- A. Verify that you are Project Billing Manager for the GCP project
- B. Update the existing project to link it to the existing billing account.
- C. Verify that you are Project Billing Manager for the GCP project
- D. Create a new billing account and link the new billing account to the existing project.
- E. Verify that you are Billing Administrator for the billing account
- F. Create a new project and link the new project to the existing billing account.
- G. Verify that you are Billing Administrator for the billing account
- H. Update the existing project to link it to the existing billing account.

**Answer: C**

#### NEW QUESTION 139

Your organization needs to grant users access to query datasets in BigQuery but prevent them from accidentally deleting the datasets. You want a solution that follows Google-recommended practices. What should you do?

- A. Add users to roles/bigquery user role only, instead of roles/bigquery dataOwner.
- B. Add users to roles/bigquery dataEditor role only, instead of roles/bigquery dataOwner.
- C. Create a custom role by removing delete permissions, and add users to that role only.
- D. Create a custom role by removing delete permission
- E. Add users to the group, and then add the group to the custom role.

**Answer: B**

#### NEW QUESTION 141

You need to update a deployment in Deployment Manager without any resource downtime in the deployment. Which command should you use?

- A. `gcloud deployment-manager deployments create --config <deployment-config-path>`
- B. `gcloud deployment-manager deployments update --config <deployment-config-path>`
- C. `gcloud deployment-manager resources create --config <deployment-config-path>`
- D. `gcloud deployment-manager resources update --config <deployment-config-path>`

**Answer: B**

#### NEW QUESTION 144

You want to select and configure a solution for storing and archiving data on Google Cloud Platform. You need to support compliance objectives for data from one geographic location. This data is archived after 30 days and needs to be accessed annually. What should you do?

- A. Select Multi-Regional Storage
- B. Add a bucket lifecycle rule that archives data after 30 days to Coldline Storage.
- C. Select Multi-Regional Storage
- D. Add a bucket lifecycle rule that archives data after 30 days to Nearline Storage.
- E. Select Regional Storage
- F. Add a bucket lifecycle rule that archives data after 30 days to Nearline Storage.
- G. Select Regional Storage
- H. Add a bucket lifecycle rule that archives data after 30 days to Coldline Storage.

**Answer: C**

#### NEW QUESTION 149

You are running multiple microservices in a Kubernetes Engine cluster. One microservice is rendering images. The microservice responsible for the image rendering requires a large amount of CPU time compared to the memory it requires. The other microservices are workloads that are optimized for n1-standard machine types. You need to optimize your cluster so that all workloads are using resources as efficiently as possible. What should you do?

- A. Assign the pods of the image rendering microservice a higher pod priority than the other microservices
- B. Create a node pool with compute-optimized machine type nodes for the image rendering microservice Use the node pool with general-purpose machine type nodes for the other microservices
- C. Use the node pool with general-purpose machine type nodes for the image rendering microservice Create a nodepool with compute-optimized machine type nodes for the other microservices
- D. Configure the required amount of CPU and memory in the resource requests specification of the image rendering microservice deployment Keep the resource requests for the other microservices at the default

**Answer: B**

**NEW QUESTION 153**

You have a Compute Engine instance hosting a production application. You want to receive an email if the instance consumes more than 90% of its CPU resources for more than 15 minutes. You want to use Google services. What should you do?

- A. \* 1. Create a consumer Gmail account.\* 2. Write a script that monitors the CPU usage.\* 3. When the CPU usage exceeds the threshold, have that script send an email using the Gmail account and smtp.gmail.com on port 25 as SMTP server.
- B. \* 1. Create a Stackdriver Workspace, and associate your Google Cloud Platform (GCP) project with it.\* 2. Create an Alerting Policy in Stackdriver that uses the threshold as a trigger condition
- C. \* 3. Configure your email address in the notification channel.
- D. \* 1. Create a Stackdriver Workspace, and associate your GCP project with it.\* 2. Write a script that monitors the CPU usage and sends it as a custom metric to Stackdriver
- E. \* 3. Create an uptime check for the instance in Stackdriver.
- F. \* 1. In Stackdriver Logging, create a logs-based metric to extract the CPU usage by using this regular expression: CPU Usage: ([0-9] {1,3})%\* 2. In Stackdriver Monitoring, create an Alerting Policy based on this metric
- G. \* 3. Configure your email address in the notification channel.

**Answer: D**

**NEW QUESTION 156**

You have an application on a general-purpose Compute Engine instance that is experiencing excessive disk read throttling on its Zonal SSD Persistent Disk. The application primarily reads large files from disk. The disk size is currently 350 GB. You want to provide the maximum amount of throughput while minimizing costs. What should you do?

- A. Increase the size of the disk to 1 TB.
- B. Increase the allocated CPU to the instance.
- C. Migrate to use a Local SSD on the instance.
- D. Migrate to use a Regional SSD on the instance.

**Answer: C**

**NEW QUESTION 159**

You have one project called proj-sa where you manage all your service accounts. You want to be able to use a service account from this project to take snapshots of VMs running in another project called proj-vm. What should you do?

- A. Download the private key from the service account, and add it to each VM's custom metadata.
- B. Download the private key from the service account, and add the private key to each VM's SSH keys.
- C. Grant the service account the IAM Role of Compute Storage Admin in the project called proj-vm.
- D. When creating the VMs, set the service account's API scope for Compute Engine to read/write.

**Answer: C**

**NEW QUESTION 161**

You are deploying an application to a Compute Engine VM in a managed instance group. The application must be running at all times, but only a single instance of the VM should run per GCP project. How should you configure the instance group?

- A. Set autoscaling to On, set the minimum number of instances to 1, and then set the maximum number of instances to 1.
- B. Set autoscaling to Off, set the minimum number of instances to 1, and then set the maximum number of instances to 1.
- C. Set autoscaling to On, set the minimum number of instances to 1, and then set the maximum number of instances to 2.
- D. Set autoscaling to Off, set the minimum number of instances to 1, and then set the maximum number of instances to 2.

**Answer: A**

**NEW QUESTION 164**

You are managing a Data Warehouse on BigQuery. An external auditor will review your company's processes, and multiple external consultants will need view access to the data. You need to provide them with view access while following Google-recommended practices. What should you do?

- A. Grant each individual external consultant the role of BigQuery Editor
- B. Grant each individual external consultant the role of BigQuery Viewer
- C. Create a Google Group that contains the consultants and grant the group the role of BigQuery Editor
- D. Create a Google Group that contains the consultants, and grant the group the role of BigQuery Viewer

**Answer: D**

**NEW QUESTION 165**

You have a virtual machine that is currently configured with 2 vCPUs and 4 GB of memory. It is running out of memory. You want to upgrade the virtual machine to have 8 GB of memory. What should you do?

- A. Rely on live migration to move the workload to a machine with more memory.
- B. Use gcloud to add metadata to the VM
- C. Set the key to required-memory-size and the value to 8 GB.
- D. Stop the VM, change the machine type to n1-standard-8, and start the VM.
- E. Stop the VM, increase the memory to 8 GB, and start the VM.

**Answer: D**

**NEW QUESTION 166**

You are the team lead of a group of 10 developers. You provided each developer with an individual Google Cloud Project that they can use as their personal sandbox to experiment with different Google Cloud solutions. You want to be notified if any of the developers are spending above \$500 per month on their sandbox environment. What should you do?

- A. Create a single budget for all projects and configure budget alerts on this budget.
- B. Create a separate billing account per sandbox project and enable BigQuery billing export
- C. Create a Data Studio dashboard to plot the spending per billing account.
- D. Create a budget per project and configure budget alerts on all of these budgets.
- E. Create a single billing account for all sandbox projects and enable BigQuery billing export
- F. Create a Data Studio dashboard to plot the spending per project.

**Answer: C**

#### NEW QUESTION 168

You have an application that looks for its licensing server on the IP 10.0.3.21. You need to deploy the licensing server on Compute Engine. You do not want to change the configuration of the application and want the application to be able to reach the licensing server. What should you do?

- A. Reserve the IP 10.0.3.21 as a static internal IP address using gcloud and assign it to the licensing server.
- B. Reserve the IP 10.0.3.21 as a static public IP address using gcloud and assign it to the licensing server.
- C. Use the IP 10.0.3.21 as a custom ephemeral IP address and assign it to the licensing server.
- D. Start the licensing server with an automatic ephemeral IP address, and then promote it to a static internal IP address.

**Answer: A**

#### NEW QUESTION 171

You need to configure IAM access audit logging in BigQuery for external auditors. You want to follow Google-recommended practices. What should you do?

- A. Add the auditors group to the 'logging.viewer' and 'bigQuery.dataViewer' predefined IAM roles.
- B. Add the auditors group to two new custom IAM roles.
- C. Add the auditor user accounts to the 'logging.viewer' and 'bigQuery.dataViewer' predefined IAM roles.
- D. Add the auditor user accounts to two new custom IAM roles.

**Answer: C**

#### NEW QUESTION 176

You need to add a group of new users to Cloud Identity. Some of the users already have existing Google accounts. You want to follow one of Google's recommended practices and avoid conflicting accounts. What should you do?

- A. Invite the user to transfer their existing account
- B. Invite the user to use an email alias to resolve the conflict
- C. Tell the user that they must delete their existing account
- D. Tell the user to remove all personal email from the existing account

**Answer: B**

#### NEW QUESTION 180

You have 32 GB of data in a single file that you need to upload to a Nearline Storage bucket. The WAN connection you are using is rated at 1 Gbps, and you are the only one on the connection. You want to use as much of the rated 1 Gbps as possible to transfer the file rapidly. How should you upload the file?

- A. Use the GCP Console to transfer the file instead of gsutil.
- B. Enable parallel composite uploads using gsutil on the file transfer.
- C. Decrease the TCP window size on the machine initiating the transfer.
- D. Change the storage class of the bucket from Nearline to Multi-Regional.

**Answer: B**

#### NEW QUESTION 182

You have production and test workloads that you want to deploy on Compute Engine. Production VMs need to be in a different subnet than the test VMs. All the VMs must be able to reach each other over internal IP without creating additional routes. You need to set up VPC and the 2 subnets. Which configuration meets these requirements?

- A. Create a single custom VPC with 2 subnet
- B. Create each subnet in a different region and with a different CIDR range.
- C. Create a single custom VPC with 2 subnet
- D. Create each subnet in the same region and with the same CIDR range.
- E. Create 2 custom VPCs, each with a single subne
- F. Create each subnet is a different region and with a different CIDR range.
- G. Create 2 custom VPCs, each with a single subne
- H. Create each subnet in the same region and with the same CIDR range.

**Answer: A**

#### NEW QUESTION 185

You are building an archival solution for your data warehouse and have selected Cloud Storage to archive your data. Your users need to be able to access this archived data once a quarter for some regulatory requirements. You want to select a cost-efficient option. Which storage option should you use?

- A. Cold Storage



- B. Nearline Storage
- C. Regional Storage
- D. Multi-Regional Storage

**Answer: B**

**Explanation:**

Nearline, Coldline, and Archive offer ultra low-cost, highly-durable, highly available archival storage. For data accessed less than once a year, Archive is a cost-effective storage option for long-term preservation of data.

Coldline is also ideal for cold storage—data your business expects to touch less than once a quarter. For warmer storage, choose Nearline: data you expect to access less than once a month, but possibly multiple times throughout the year. All storage classes are available across all GCP regions and provide unparalleled sub-second access speeds with a consistent API.

**NEW QUESTION 186**

You are hosting an application on bare-metal servers in your own data center. The application needs access to Cloud Storage. However, security policies prevent the servers hosting the application from having public IP addresses or access to the internet. You want to follow Google-recommended practices to provide the application with access to Cloud Storage. What should you do?

- A. 1. Use nslookup to get the IP address for storage.googleapis.com.2. Negotiate with the security team to be able to give a public IP address to the servers.3. Only allow egress traffic from those servers to the IP addresses for storage.googleapis.com.
- B. 1. Using Cloud VPN, create a VPN tunnel to a Virtual Private Cloud (VPC) in Google Cloud Platform (GCP).2. In this VPC, create a Compute Engine instance and install the Squid proxy server on this instance.3. Configure your servers to use that instance as a proxy to access Cloud Storage.
- C. 1. Use Migrate for Compute Engine (formerly known as Velostrata) to migrate those servers to Compute Engine.2. Create an internal load balancer (ILB) that uses storage.googleapis.com as backend.3. Configure your new instances to use this ILB as proxy.
- D. 1. Using Cloud VPN or Interconnect, create a tunnel to a VPC in GCP.2. Use Cloud Router to create a custom route advertisement for 199.36.153.4/30. Announce that network to your on-premises network through the VPN tunnel.3. In your on-premises network, configure your DNS server to resolve \*.googleapis.com as a CNAME to restricted.googleapis.com.

**Answer: D**

**NEW QUESTION 189**

A team of data scientists infrequently needs to use a Google Kubernetes Engine (GKE) cluster that you manage. They require GPUs for some long-running, non-restartable jobs. You want to minimize cost. What should you do?

- A. Enable node auto-provisioning on the GKE cluster.
- B. Create a VerticalPodAutscaler for those workloads.
- C. Create a node pool with preemptible VMs and GPUs attached to those VMs.
- D. Create a node pool of instances with GPUs, and enable autoscaling on this node pool with a minimum size of 1.

**Answer: C**

**NEW QUESTION 192**

You are operating a Google Kubernetes Engine (GKE) cluster for your company where different teams can run non-production workloads. Your Machine Learning (ML) team needs access to Nvidia Tesla P100 GPUs to train their models. You want to minimize effort and cost. What should you do?

- A. Ask your ML team to add the “accelerator: gpu” annotation to their pod specification.
- B. Recreate all the nodes of the GKE cluster to enable GPUs on all of them.
- C. Create your own Kubernetes cluster on top of Compute Engine with nodes that have GPU
- D. Dedicate this cluster to your ML team.
- E. Add a new, GPU-enabled, node pool to the GKE cluste
- F. Ask your ML team to add the cloud.google.com/gke -accelerator: nvidia-tesla-p100 nodeSelector to their pod specification.

**Answer: B**

**NEW QUESTION 193**

Your organization has user identities in Active Directory. Your organization wants to use Active Directory as their source of truth for identities. Your organization wants to have full control over the Google accounts used by employees for all Google services, including your Google Cloud Platform (GCP) organization. What should you do?

- A. Use Google Cloud Directory Sync (GCDS) to synchronize users into Cloud Identity.
- B. Use the cloud Identity APIs and write a script to synchronize users to Cloud Identity.
- C. Export users from Active Directory as a CSV and import them to Cloud Identity via the Admin Console.
- D. Ask each employee to create a Google account using self signu
- E. Require that each employee use their company email address and password.

**Answer: A**

**NEW QUESTION 197**

You have sensitive data stored in three Cloud Storage buckets and have enabled data access logging. You want to verify activities for a particular user for these buckets, using the fewest possible steps. You need to verify the addition of metadata labels and which files have been viewed from those buckets. What should you do?

- A. Using the GCP Console, filter the Activity log to view the information.
- B. Using the GCP Console, filter the Stackdriver log to view the information.
- C. View the bucket in the Storage section of the GCP Console.
- D. Create a trace in Stackdriver to view the information.

**Answer: A**

**NEW QUESTION 198**

You are managing several Google Cloud Platform (GCP) projects and need access to all logs for the past 60 days. You want to be able to explore and quickly analyze the log contents. You want to follow Google- recommended practices to obtain the combined logs for all projects. What should you do?

- A. Navigate to Stackdriver Logging and select resource.labels.project\_id="\*\*"
- B. Create a Stackdriver Logging Export with a Sink destination to a BigQuery dataset
- C. Configure the table expiration to 60 days.
- D. Create a Stackdriver Logging Export with a Sink destination to Cloud Storage
- E. Create a lifecycle rule to delete objects after 60 days.
- F. Configure a Cloud Scheduler job to read from Stackdriver and store the logs in BigQuery
- G. Configure the table expiration to 60 days.

**Answer: B**

**NEW QUESTION 200**

You have downloaded and installed the gcloud command line interface (CLI) and have authenticated with your Google Account. Most of your Compute Engine instances in your project run in the europe-west1-d zone. You want to avoid having to specify this zone with each CLI command when managing these instances. What should you do?

- A. Set the europe-west1-d zone as the default zone using the gcloud config subcommand.
- B. In the Settings page for Compute Engine under Default location, set the zone to europe-west1-d.
- C. In the CLI installation directory, create a file called default.conf containing zone=europe-west1-d.
- D. Create a Metadata entry on the Compute Engine page with key compute/zone and value europe-west1-d.

**Answer: C**

**NEW QUESTION 203**

You have a developer laptop with the Cloud SDK installed on Ubuntu. The Cloud SDK was installed from the Google Cloud Ubuntu package repository. You want to test your application locally on your laptop with Cloud Datastore. What should you do?

- A. Export Cloud Datastore data using gcloud datastore export.
- B. Create a Cloud Datastore index using gcloud datastore indexes create.
- C. Install the google-cloud-sdk-datastore-emulator component using the apt get install command.
- D. Install the cloud-datastore-emulator component using the gcloud components install command.

**Answer: D**

**NEW QUESTION 205**

Several employees at your company have been creating projects with Cloud Platform and paying for it with their personal credit cards, which the company reimburses. The company wants to centralize all these projects under a single, new billing account. What should you do?

- A. Contact cloud-billing@google.com with your bank account details and request a corporate billing account for your company.
- B. Create a ticket with Google Support and wait for their call to share your credit card details over the phone.
- C. In the Google Platform Console, go to the Resource Manager and move all projects to the root Organization.
- D. In the Google Cloud Platform Console, create a new billing account and set up a payment method.

**Answer: D**

**NEW QUESTION 210**

You need to produce a list of the enabled Google Cloud Platform APIs for a GCP project using the gcloud command line in the Cloud Shell. The project name is my-project. What should you do?

- A. Run gcloud projects list to get the project ID, and then run gcloud services list --project <project ID>.
- B. Run gcloud init to set the current project to my-project, and then run gcloud services list --available.
- C. Run gcloud info to view the account value, and then run gcloud services list --account <Account>.
- D. Run gcloud projects describe <project ID> to verify the project value, and then run gcloud services list--available.

**Answer: A**

**NEW QUESTION 213**


Your organization has strict requirements to control access to Google Cloud projects. You need to enable your Site Reliability Engineers (SREs) to approve requests from the Google Cloud support team when an SRE opens a support case. You want to follow Google-recommended practices. What should you do?

- A. Add your SREs to roles/iam.roleAdmin role.
- B. Add your SREs to roles/accessapproval approver role.
- C. Add your SREs to a group and then add this group to roles/iam roleAdmin role.
- D. Add your SREs to a group and then add this group to roles/accessapproval approver role.

**Answer: A**

**NEW QUESTION 217**

You are building a pipeline to process time-series data. Which Google Cloud Platform services should you put in boxes 1,2,3, and 4?

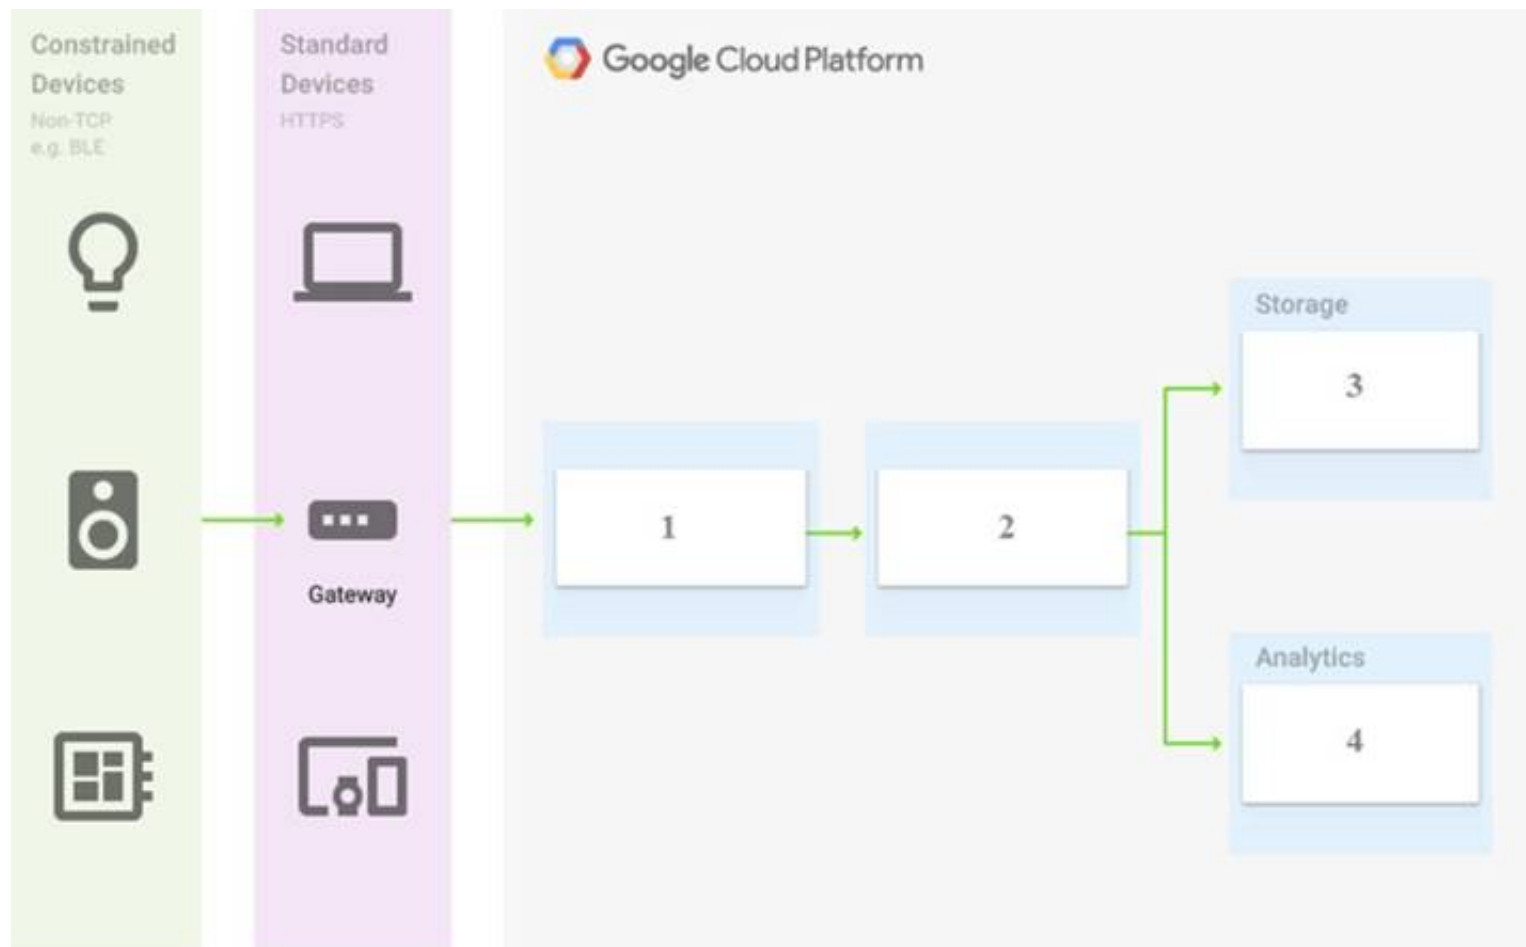

- A. Cloud Pub/Sub, Cloud Dataflow, Cloud Datastore, BigQuery
- B. Firebase Messages, Cloud Pub/Sub, Cloud Spanner, BigQuery
- C. Cloud Pub/Sub, Cloud Storage, BigQuery, Cloud Bigtable
- D. Cloud Pub/Sub, Cloud Dataflow, Cloud Bigtable, BigQuery

**Answer: D**

#### NEW QUESTION 220

You have created a code snippet that should be triggered whenever a new file is uploaded to a Cloud Storage bucket. You want to deploy this code snippet. What should you do?

- A. Use App Engine and configure Cloud Scheduler to trigger the application using Pub/Sub.
- B. Use Cloud Functions and configure the bucket as a trigger resource.
- C. Use Google Kubernetes Engine and configure a CronJob to trigger the application using Pub/Sub.
- D. Use Dataflow as a batch job, and configure the bucket as a data source.

**Answer: A**

#### NEW QUESTION 223

You are building an application that stores relational data from users. Users across the globe will use this application. Your CTO is concerned about the scaling requirements because the size of the user base is unknown. You need to implement a database solution that can scale with your user growth with minimum configuration changes. Which storage solution should you use?

- A. Cloud SQL
- B. Cloud Spanner
- C. Cloud Firestore
- D. Cloud Datastore

**Answer: D**

#### NEW QUESTION 225

You need to create a custom IAM role for use with a GCP service. All permissions in the role must be suitable for production use. You also want to clearly share with your organization the status of the custom role. This will be the first version of the custom role. What should you do?

- A. Use permissions in your role that use the 'supported' support level for role permission
- B. Set the role stage to ALPHA while testing the role permissions.
- C. Use permissions in your role that use the 'supported' support level for role permission
- D. Set the role stage to BETA while testing the role permissions.
- E. Use permissions in your role that use the 'testing' support level for role permission
- F. Set the role stage to ALPHA while testing the role permissions.
- G. Use permissions in your role that use the 'testing' support level for role permission
- H. Set the role stage to BETA while testing the role permissions.

**Answer: C**

#### NEW QUESTION 227

Your company implemented BigQuery as an enterprise data warehouse. Users from multiple business units run queries on this data warehouse. However, you notice that query costs for BigQuery are very high, and you need to control costs. Which two methods should you use? (Choose two.)

- A. Split the users from business units to multiple projects.
- B. Apply a user- or project-level custom query quota for BigQuery data warehouse.
- C. Create separate copies of your BigQuery data warehouse for each business unit.
- D. Split your BigQuery data warehouse into multiple data warehouses for each business unit.
- E. Change your BigQuery query model from on-demand to flat rat
- F. Apply the appropriate number of slots to each Project.

**Answer:** BE

#### NEW QUESTION 228

You are running a data warehouse on BigQuery. A partner company is offering a recommendation engine based on the data in your data warehouse. The partner company is also running their application on Google Cloud. They manage the resources in their own project, but they need access to the BigQuery dataset in your project. You want to provide the partner company with access to the dataset What should you do?

- A. Create a Service Account in your own project, and grant this Service Account access to BigQuery in your project
- B. Create a Service Account in your own project, and ask the partner to grant this Service Account access to BigQuery in their project
- C. Ask the partner to create a Service Account in their project, and have them give the Service Account access to BigQuery in their project
- D. Ask the partner to create a Service Account in their project, and grant their Service Account access to the BigQuery dataset in your project

**Answer:** D

#### NEW QUESTION 232

Your company set up a complex organizational structure on Google Cloud Platform. The structure includes hundreds of folders and projects. Only a few team members should be able to view the hierarchical structure. You need to assign minimum permissions to these team members and you want to follow Google-recommended practices. What should you do?

- A. Add the users to roles/browser role.
- B. Add the users to roles/iam.roleViewer role.
- C. Add the users to a group, and add this group to roles/browser role.
- D. Add the users to a group, and add this group to roles/iam.roleViewer role.

**Answer:** C

#### NEW QUESTION 237

The sales team has a project named Sales Data Digest that has the ID acme-data-digest You need to set up similar Google Cloud resources for the marketing team but their resources must be organized independently of the sales team. What should you do?

- A. Grant the Project Editor role to the Marketing learn for acme data digest
- B. Create a Project Lien on acme-data digest and then grant the Project Editor role to the Marketing team
- C. Create another protect with the ID acme-marketing-data-digest for the Marketing team and deploy the resources there
- D. Create a new protect named Meeting Data Digest and use the ID acme-data-digest Grant the Project Editor role to the Marketing team.

**Answer:** C

#### NEW QUESTION 239

You need to monitor resources that are distributed over different projects in Google Cloud Platform. You want to consolidate reporting under the same Stackdriver Monitoring dashboard. What should you do?

- A. Use Shared VPC to connect all projects, and link Stackdriver to one of the projects.
- B. For each project, create a Stackdriver accoun
- C. In each project, create a service account for that project and grant it the role of Stackdriver Account Editor in all other projects.
- D. Configure a single Stackdriver account, and link all projects to the same account.
- E. Configure a single Stackdriver account for one of the project
- F. In Stackdriver, create a Group and add the other project names as criteria for that Group.

**Answer:** D

#### NEW QUESTION 241

Your company has an internal application for managing transactional orders. The application is used exclusively by employees in a single physical location. The application requires strong consistency, fast queries, and ACID guarantees for multi-table transactional updates. The first version of the application is implemented inPostgreSQL, and you want to deploy it to the cloud with minimal code changes. Which database is most appropriate for this application?

- A. BigQuery
- B. Cloud SQL
- C. Cloud Spanner
- D. Cloud Datastore

**Answer:** B

#### NEW QUESTION 242

You need to enable traffic between multiple groups of Compute Engine instances that are currently running two different GCP projects. Each group of Compute Engine instances is running in its own VPC. What should you do?

- A. Verify that both projects are in a GCP Organizatio
- B. Create a new VPC and add all instances.
- C. Verify that both projects are in a GCP Organizatio
- D. Share the VPC from one project and request that the Compute Engine instances in the other project use this shared VPC.



- E. Verify that you are the Project Administrator of both project
- F. Create two new VPCs and add all instances.
- G. Verify that you are the Project Administrator of both project
- H. Create a new VPC and add all instances.

**Answer: B**

#### NEW QUESTION 243

You need to track and verify modifications to a set of Google Compute Engine instances in your Google Cloud project. In particular, you want to verify OS system patching events on your virtual machines (VMs). What should you do?

- A. Review the Compute Engine activity logs Select and review the Admin Event logs
- B. Review the Compute Engine activity logs Select and review the System Event logs
- C. Install the Cloud Logging Agent In Cloud Logging review the Compute Engine syslog logs
- D. Install the Cloud Logging Agent In Cloud Logging, review the Compute Engine operation logs

**Answer: A**

#### NEW QUESTION 245

You are working with a Cloud SQL MySQL database at your company. You need to retain a month-end copy of the database for three years for audit purposes. What should you do?

- A. Save file automatic first-of-the- month backup for three years Store the backup file in an Archive class Cloud Storage bucket
- B. Convert the automatic first-of-the-month backup to an export file Write the export file to a Coldlineclass Cloud Storage bucket
- C. Set up an export job for the first of the month Write the export file to an Archive class Cloud Storage bucket
- D. Set up an on-demand backup tor the first of the month Write the backup to an Archive class Cloud Storage bucket

**Answer: A**

#### NEW QUESTION 248

You need to reduce GCP service costs for a division of your company using the fewest possible steps. You need to turn off all configured services in an existing GCP project. What should you do?

- A. \* 1. Verify that you are assigned the Project Owners IAM role for this project.\* 2. Locate the project in the GCP console, click Shut down and then enter the project ID.
- B. \* 1. Verify that you are assigned the Project Owners IAM role for this project.\* 2. Switch to the project in the GCP console, locate the resources and delete them.
- C. 1. Verify that you are assigned the Organizational Administrator IAM role for this project.\* 2. Locate the project in the GCP console, enter the project ID and then click Shut down.
- D. \* 1. Verify that you are assigned the Organizational Administrators IAM role for this project.\* 2. Switch to the project in the GCP console, locate the resources and delete them.

**Answer: C**

#### NEW QUESTION 253

Your company has a single sign-on (SSO) identity provider that supports Security Assertion Markup Language (SAML) integration with service providers. Your company has users in Cloud Identity. You would like users to authenticate using your company's SSO provider. What should you do?

- A. In Cloud Identity, set up SSO with Google as an identity provider to access custom SAML apps.
- B. In Cloud Identity, set up SSO with a third-party identity provider with Google as a service provider.
- C. Obtain OAuth 2.0 credentials, configure the user consent screen, and set up OAuth 2.0 for Mobile & Desktop Apps.
- D. Obtain OAuth 2.0 credentials, configure the user consent screen, and set up OAuth 2.0 for Web Server Applications.

**Answer: C**

#### NEW QUESTION 256

.....

## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### Associate-Cloud-Engineer Practice Exam Features:

- \* Associate-Cloud-Engineer Questions and Answers Updated Frequently
- \* Associate-Cloud-Engineer Practice Questions Verified by Expert Senior Certified Staff
- \* Associate-Cloud-Engineer Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* Associate-Cloud-Engineer Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The Associate-Cloud-Engineer Practice Test Here](#)**