



Oracle

Exam Questions 1z0-808

Java SE 8 Programmer I

NEW QUESTION 1

You are asked to create a method that accepts an array of integers and returns the highest value from that array.
Given the code fragment:

```
class Test{
    public static void main(String[] args) {
        int numbers[] = {12, 13, 42, 32, 15, 156, 23, 51, 12};
        int[] keys = findMax(numbers);
    }

    /* line n1 */ {
        int[] keys = new int[3];
        /* code goes here*/
        return keys;
    }
}
```

Which method signature do you use at line n1?

- A. public int findMax (int[] numbers)
- B. static int[] findMax (int[] max)
- C. static int findMax (int[] numbers)
- D. final int findMax (int[])

Answer: C

NEW QUESTION 2

Given:

```
String stuff = "TV";
String res = null;

if (stuff.equals("TV")) {
    res = "Walter";
} else if (stuff.equals("Movie")) {
    res = "White";
} else {
    res = "No Result";
}
```

Which code fragment can replace the if block?

- A
- ```
stuff.equals ("TV") ? res= "Walter" : stuff.equals ("Movie") ?
res = "White" : res = "No Result";
```
- B
- ```
res = stuff.equals ("TV") ? "Walter" else stuff.equals
("Movie")? "White" : "No Result";
```
- C
- ```
res = stuff.equals ("TV") ? stuff.equals ("Movie")? "Walter" :
"White" : "No Result";
```
- D
- ```
res = stuff.equals ("TV")? "Walter" : stuff.equals ("Movie")?
"White" : "No Result";
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 3

Given the code fragment:

```
public static void main (String[] args) {  
    String[] arr = ("Hi", "How", "Are", "You");  
    List<String> arrList = new ArrayList<>(Arrays.asList(arr));  
    if (arrList.removeIf((String s) -> (return s.length() <= 2;))) {  
        System.out.println(s + "removed")  
    }  
}
```

What is the result?

- A. Compilation fails.
- B. Hi removed
- C. An UnsupportedOperationException is thrown at runtime.
- D. The program compiles, but it prints nothing.

Answer: A

NEW QUESTION 4

Given this code for a Planet object:

```
public class Planet {  
    public String name;  
    public int moons;  
  
    public Planet(String name, int moons) {  
        this.name = name;  
        this.moons = moons;  
    }  
}
```

And this method:

```
public static void main(String[] args){  
    Planet[] planets = {  
        new Planet("Mercury", 0),  
        new Planet("Venus", 0),  
        new Planet("Earth", 1),  
        new Planet("Mars", 2)  
    };  
  
    System.out.println(planets);  
    System.out.println(planets[2].name);  
    System.out.println(planets[2].moons);  
}
```

What is the output?

A

```
planets
Earth
1
```

B

```
[LPlanets.Planet;@15db9742
Earth
1
```

C

```
[LPlanets.Planet;@15db9742
Planets.Planet@6d06d69c
1
```

D

```
[LPlanets.Planet;@15db9742
Planets.Planet@6d06d69c
[LPlanets.Moon;@7852e922
```

E

```
[LPlanets.Planet;@15db9742
Venus
0
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

Answer: C

NEW QUESTION 5

Given the code fragment:

```
public static void main(String[] args) {
    int data[] = {2010, 2013, 2014, 2015, 2014};
    int key = 2014;
    int count = 0;
    for (int e: data) {
        if (e != key) {
            continue;
            count++;
        }
    }
    System.out.print(count + " Found");
}
```

What is the result?

- A. Compilation fails.
- B. 0 Found
- C. 1 Found
- D. 3 Found

Answer: A

NEW QUESTION 6

Given:

```
public class App {  
    int count;  
    public static void displayMsg () {  
        count++; // line n1  
        System.out.println ("Welcome "+"Visit Count: "+count); // line n2  
    }  
    public static void main (String [] args) {  
        App.displayMsg (); // line n3  
        App.displayMsg (); // line n4  
    }  
}
```

What is the result?

- A. Compilation fails at line n3 and line n4.
- B. Compilation fails at line n1 and line n2.
- C. Welcome Visit Count:1Welcome Visit Count: 1
- D. Welcome Visit Count:1Welcome Visit Count: 2

Answer: B

NEW QUESTION 7

Given:


```
public class Test {  
    public static void main(String[] args) {  
        Test ts = new Test();  
        System.out.print(isAvailable + " ");  
        isAvailable= ts.doStuff();  
        System.out.println(isAvailable);  
    }  
    public static boolean doStuff() {  
        return !isAvailable;  
    }  
    static boolean isAvailable = true;  
}
```

What is the result?

- A. Compilation fails.
- B. false true
- C. true false
- D. true true
- E. false false

Answer: C

Explanation:

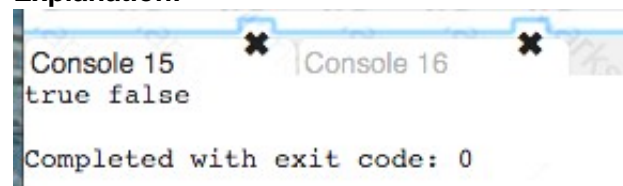

```
Console 15      Console 16  
true false  
false  
Completed with exit code: 0
```

NEW QUESTION 8

Given the code fragment:

```
public static void main(String[] args) {  
    int ii = 0;  
    int jj = 7;  
    for (ii = 0; ii < jj - 1; ii = ii + 2) {  
        System.out.print(ii + " ");  
    }  
}
```

What is the result?

- A. 2 4
- B. 0 2 4 6
- C. 0 2 4
- D. Compilation fails

Answer: C

NEW QUESTION 9

Given:


```
public class App {
    int count;
    public static void displayMsg() {
        System.out.println("Welcome Visit Count: " + count++);    // line n1
    }
    public static void main(String[] args) {
        App.displayMsg();
        displayMsg();                                           // line n2
    }
}
```

What is the result?

- A. Welcome Visit Count:0Welcome Visit Count: 1
- B. Compilation fails at line n2.
- C. Compilation fails at line n1.
- D. Welcome Visit Count:0Welcome Visit Count: 0

Answer: C

Explanation:

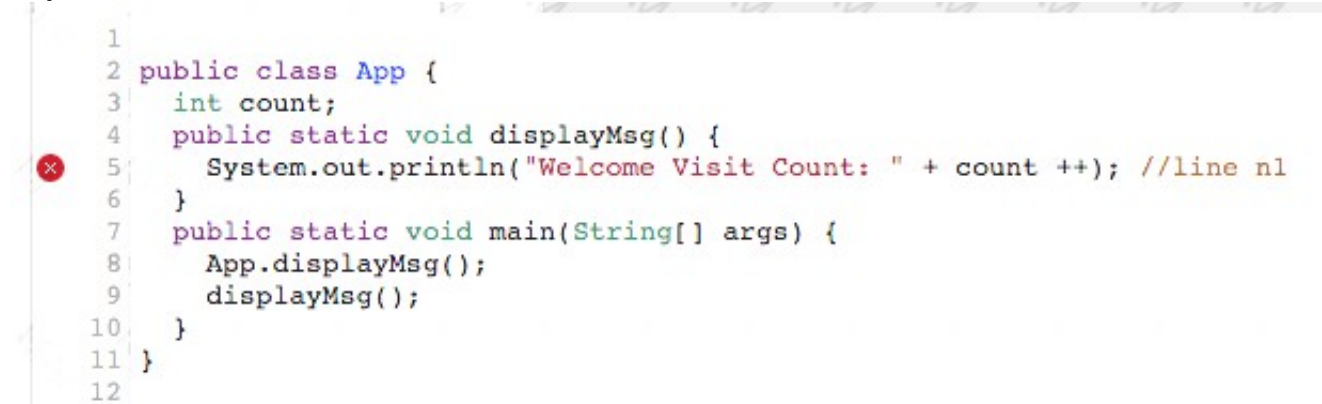

```
1
2 public class App {
3     int count;
4     public static void displayMsg() {
5         System.out.println("Welcome Visit Count: " + count ++); //line n1
6     }
7     public static void main(String[] args) {
8         App.displayMsg();
9         displayMsg();
10    }
11 }
12
```

NEW QUESTION 10

This grid shows the state of a 2D array:

0	0	
	X	0
X		X

The grid is created with this code:

```
char[][] grid = new char[3][3];
grid[1][1] = 'X';
grid[0][0] = '0';
grid[2][0] = 'X';
grid[0][1] = '0';
grid[2][2] = 'X';
grid[1][2] = '0';
//line n1
```

Which line of code, when inserted in place of //line n1, adds an X into the grid so that the grid contains three consecutive Xs?

- A. grid[2][1] = 'X';
- B. grid[3][2] = 'X';
- C. grid[3][1] = 'X';
- D. grid[2][3] = 'X';

Answer: D

NEW QUESTION 10

Given the code fragment:

```
public static void main(String[] args) {
    LocalDate date = LocalDate.of(2012, 1, 30);
    date.plusDays(10);
    System.out.println(date);
}
```

What is the result?

- A. 2012-02-10 00:00
- B. 2012-01-30
- C. 2012-02-10
- D. A DateTimeException is thrown at runtime.

Answer: B

Explanation:



NEW QUESTION 14

Given:

```
class Product {
    double price;
}

public class Test {
    public void updatePrice(Product product, double price) {
        price = price * 2;
        product.price = product.price + price;
    }
    public static void main(String[] args) {
        Product prt = new Product();
        prt.price = 200;
        double newPrice = 100;

        Test t = new Test();
        t.updatePrice(prt, newPrice);
        System.out.println(prt.price + " : " + newPrice);
    }
}
```

What is the result?

- A. 200.0 : 100.0
- B. 400.0 : 200.0
- C. 400.0 : 100.0
- D. Compilation fails.

Answer: C

NEW QUESTION 17

Given:

```
class X {
    static int i;
    int j;
    public static void main(String[] args) {
        X x1 = new X();
        X x2 = new X();
        x1.i = 3;
        x1.j = 4;
        x2.i = 5;
        x2.j = 6;
        System.out.println(
            x1.i + " " +
            x1.j + " " +
            x2.i + " " +
            x2.j);
    }
}
```

What is the result?

- A. 3 4 5 6
- B. 3 4 3 6
- C. 5 4 5 6
- D. 3 6 4 6

Answer: C

NEW QUESTION 22

Given the code fragment:

```
abstract class Toy {  
    int price;  
    // line n1  
}
```

Which three code fragments are valid at line n1?

A

```
public static void insertToy() {  
    /* code goes here */  
}
```

B

```
final Toy getToy() {  
    return new Toy();  
}
```

C

```
public void printToy();
```

D

```
public int calculatePrice() {  
    return price;  
}
```

E

```
public abstract int computeDiscount();
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

Answer: CDE

NEW QUESTION 25

Given:

```
interface I {  
    public void displayI();  
}  
abstract class C2 implements I {  
    public void displayC2() {  
        System.out.print("C2");  
    }  
}  
class C1 extends C2 {  
    public void displayI() {  
        System.out.print("C1");  
    }  
}
```

And the code fragment:


```
C2 obj1 = new C1();
I obj2 = new C1();

C2 s = (C2) obj2;
I t = obj1;


t.displayI();
s.displayC2();
```

What is the result?

- A. C1C2
- B. C1C1
- C. Compilation fails.
- D. C2C2

Answer: A

Explanation:

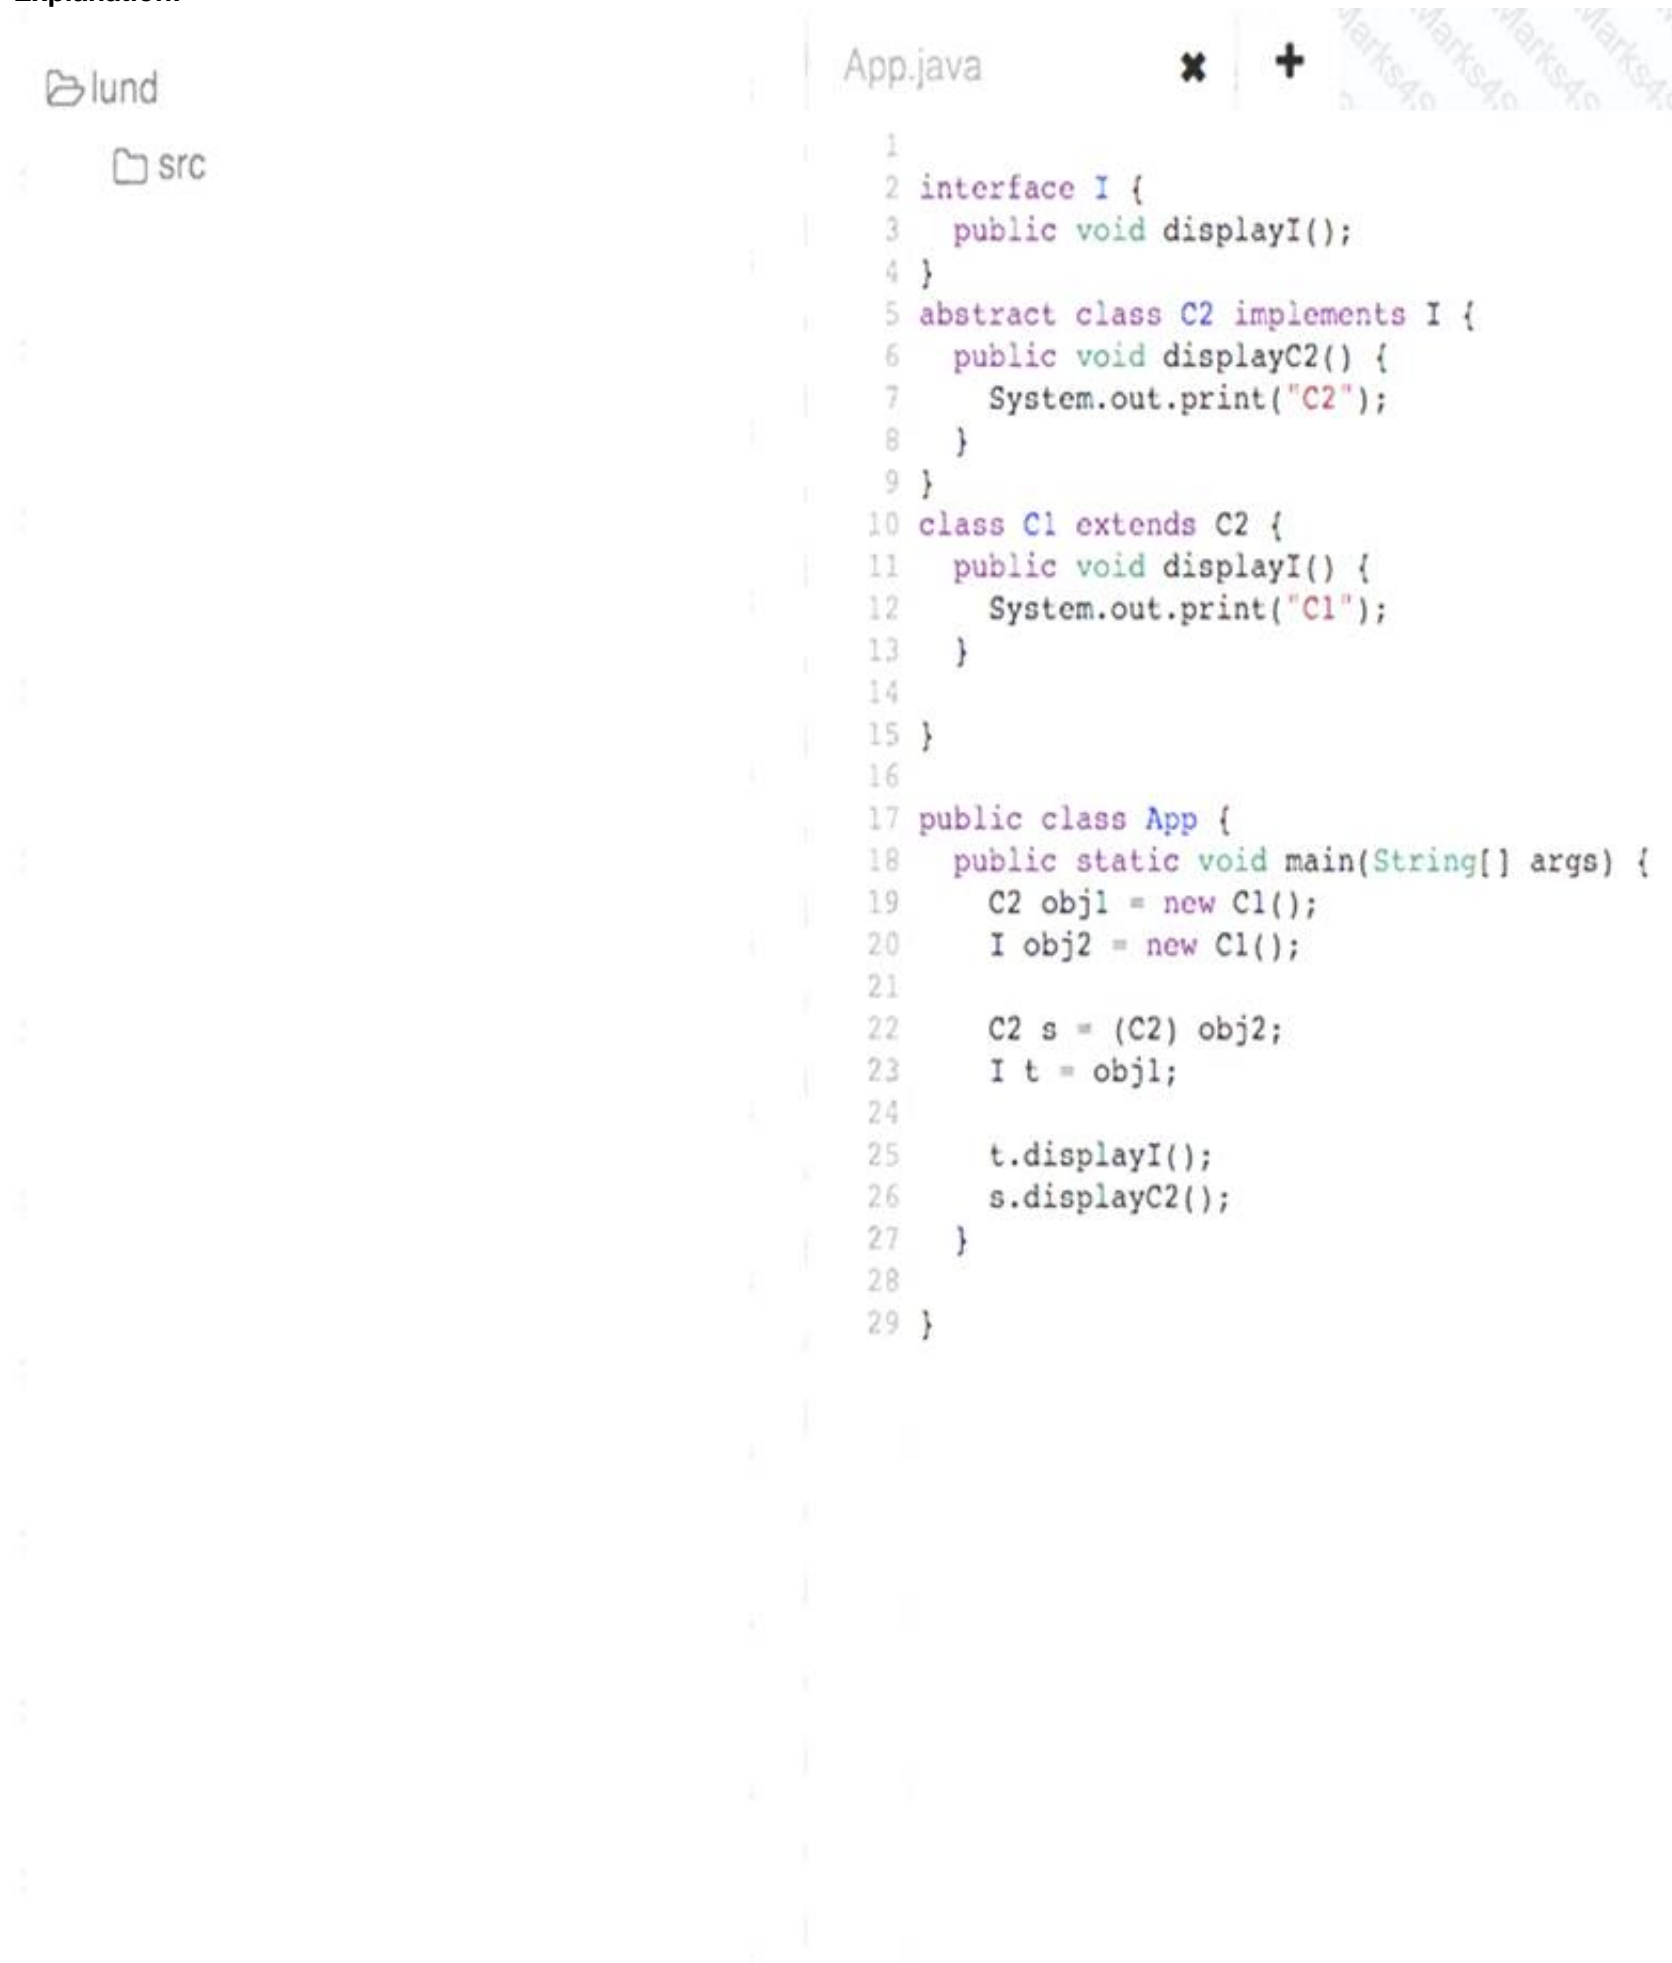

Console 1

Console 2

Console 3

Console 4

C1C2

Completed with exit code: 0

NEW QUESTION 29

Given:

```
class Caller {
    private void init () {
        System.out.println("Initialized");
    }

    private void start () {
        init();
        System.out.println("Started");
    }
}

public class TestCall {
    public static void main(String[] args) {
        Caller c = new Caller();
        c.start(); // line n1
        c.init();  // line n2
    }
}
```

What is the result?

- A. Compilation fails at line n1.
- B. InitializedStartedInitialized
- C. InitializedStarted
- D. Compilation fails at line n2.

Answer: D**NEW QUESTION 33**

Given this class:

```
public class CheckingAccount {
    public int amount;
    //line n1
}
```

And given this main method, located in another class:

```
public static void main(String[] args) {
    CheckingAccount acct = new CheckingAccount();
    //line n2
}
```

Which three pieces of code, when inserted independently, set the value of amount to 100?

A

```
At line n1 insert:
    public CheckingAccount() {
        amount = 100;
    }
```

B

```
At line n2 insert:
    this.amount = 100;
```

C

```
At line n2 insert:
    amount = 100;
```

D

```
At line n1 insert:
    public CheckingAccount() {
        this.amount = 100;
    }
```

E

```
At line n2 insert:
    acct.amount = 100;
```

F

```
At line n1 insert:
    public CheckingAccount() {
        acct.amount = 100;
    }
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E
- F. Option F

Answer: DE**NEW QUESTION 38**

Given the code snippet from a compiled Java source file:

```
public class MyFile
{
    public static void main (String[] args)
    {
        String arg1 = args[1];
        String arg2 = args[2];
        String arg3 = args[3];
        System.out.println("Arg is " + arg3);
    }
}
```

Which command-line arguments should you pass to the program to obtain the following output? Arg is 2

- A. java MyFile 1 3 2 2
- B. java MyFile 2 2 2
- C. java MyFile 1 2 2 3 4
- D. java MyFile 0 1 2 3

Answer: A**NEW QUESTION 42**

Given:

```
public class Test {
    public static void main(String[] args) {
        Test ts = new Test();
        System.out.print(isAvailable + " ");
        isAvailable= ts.doStuff();
        System.out.println(isAvailable);
    }
    public static boolean doStuff() {
        return !isAvailable;
    }
    static boolean isAvailable = false;
}
```

What is the result?

- A. Compilation fails.
- B. false true
- C. true false
- D. true true
- E. false false

Answer: B

NEW QUESTION 47

Which statement is true about the switch statement?

- A. It must contain the default section.
- B. The break statement, at the end of each case block, is optional.
- C. Its case label literals can be changed at runtime.
- D. Its expression must evaluate to a collection of values.

Answer: B

NEW QUESTION 48

Given:

```
class Caller {
    private void init () {
        System.out.println("Initialized");
    }

    private void start () {
        init();
        System.out.println("Started");
    }
}

public class TestCall {
    public static void main(String[] args) {
        Caller c = new Caller();
        c.start();
        c.init();
    }
}
```

What is the result?

- A. An exception is thrown at runtime.
- B. InitializedStartedInitialized
- C. InitializedStarted
- D. Compilation fails.

Answer: D

NEW QUESTION 50

Which statement best describes encapsulation?

- A. Encapsulation ensures that classes can be designed so that only certain fields and methods of an object are accessible from other objects.
- B. Encapsulation ensures that classes can be designed so that their methods are inheritable.
- C. Encapsulation ensures that classes can be designed with some fields and methods declared as abstract.
- D. Encapsulation ensures that classes can be designed so that if a method has an argument MyType x, any subclass of MyType can be passed to that method.

Answer: A

NEW QUESTION 53

Given:

```
class Vehicle {
    int x;
    Vehicle(){
        this(10); // line n1
    }
    Vehicle(int x) {
        this.x = x;
    }
}

class Car extends Vehicle {
    int y;
    Car() {
        super();
        this(20); // line n2
    }
    Car(int y) {
        this.y = y;
    }
    public String toString() {
        return super.x + ":" + this.y;
    }
}
```

And given the code fragment:

And given the code fragment:

```
Vehicle y = new Car();
System.out.println(y);
```

What is the result?

- A. 10:20
- B. 0:20
- C. Compilation fails at line n1
- D. Compilation fails at line n2

Answer: D**NEW QUESTION 58**

Which three statements are true about the structure of a Java class? (Choose three.)

- A. A public class must have a main method.
- B. A class can have only one private constructors.
- C. A method can have the same name as a field.
- D. A class can have overloaded static methods.
- E. The methods are mandatory components of a class.
- F. The fields need not be initialized before use.

Answer: ACE**NEW QUESTION 61**

Given the code fragment:

```
public static void main(String[] args) {
    int[][] arr = new int [2] [4];
    arr[0] = new int []{1, 3, 5, 7};
    arr[1] = new int []{1, 3};
    for (int[] a : arr) {
        for (int i : a) {
            System.out.print(i+ " ");
        }
        System.out.println();
    }
}
```


What is the result?

- A Compilation fails.
- B
- ```
1 3
1 3
```
- C
- ```
1 3
```
- followed by an `ArrayIndexOutOfBoundsException`
- D
- ```
1 3
1 3 0 0
```
- E
- ```
1 3 5 7
1 3
```

- A. Option A
 B. Option B
 C. Option C
 D. Option D
 E. Option E

Answer: E

Explanation:

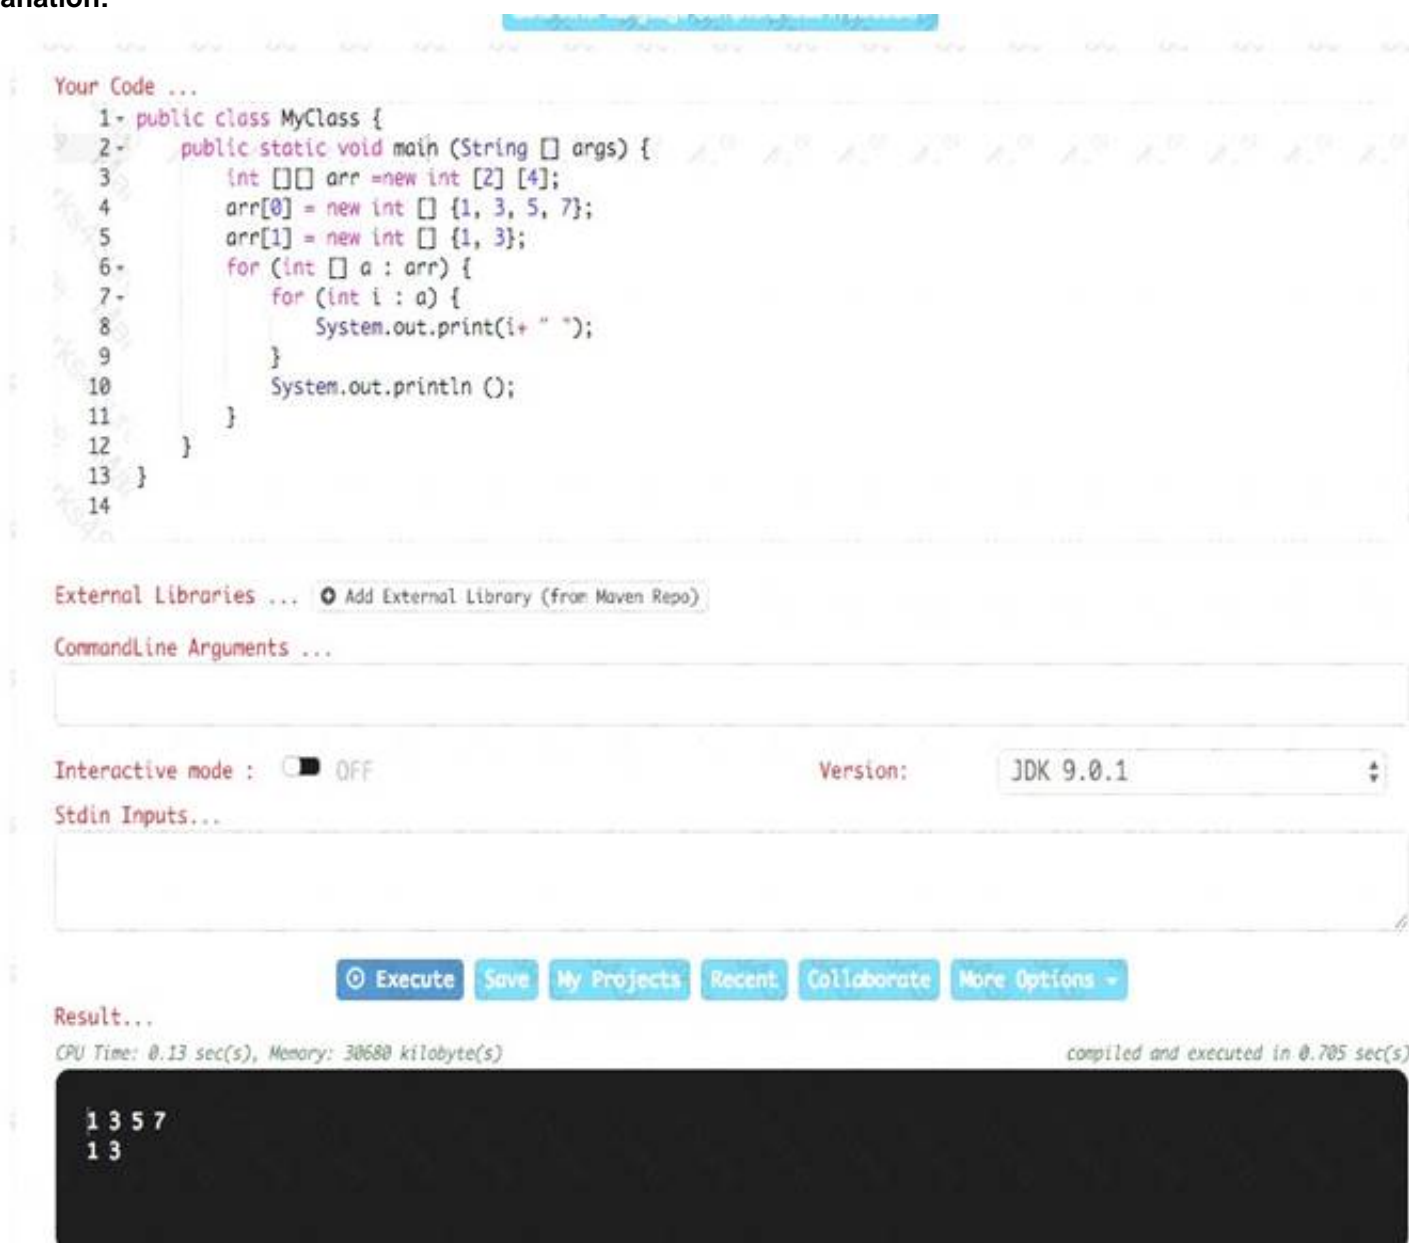

```

1- public class MyClass {
2-     public static void main (String [] args) {
3-         int [][] arr =new int [2] [4];
4-         arr[0] = new int [] {1, 3, 5, 7};
5-         arr[1] = new int [] {1, 3};
6-         for (int [] a : arr) {
7-             for (int i : a) {
8-                 System.out.print(i+ " ");
9-             }
10-            System.out.println ();
11-        }
12-    }
13- }
14-

```

External Libraries ... [Add External Library \(from Maven Repo\)](#)

CommandLine Arguments ...

Interactive mode : ☐ OFF Version: JDK 9.0.1

Stdin Inputs...

[Execute](#) [Save](#) [My Projects](#) [Recent](#) [Collaborate](#) [More Options](#)

Result...

CPU Time: 0.13 sec(s), Memory: 30680 kilobyte(s) compiled and executed in 0.705 sec(s)

```

1 3 5 7
1 3

```

NEW QUESTION 65

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

1z0-808 Practice Exam Features:

- * 1z0-808 Questions and Answers Updated Frequently
- * 1z0-808 Practice Questions Verified by Expert Senior Certified Staff
- * 1z0-808 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 1z0-808 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 1z0-808 Practice Test Here](#)