

1z0-931-20 Dumps

Oracle Autonomous Database Cloud 2020 Specialist

<https://www.certleader.com/1z0-931-20-dumps.html>



NEW QUESTION 1

Which three Oracle Cloud Infrastructure (OCI) resources do you need to configure before provisioning your Autonomous Database with Private Endpoint?

- A. Network Security Group
- B. Security List
- C. VCN
- D. Route Table
- E. Subnet

Answer: ACE

Explanation:

To provision an Autonomous Database with a private endpoint, you must have the following resources already created:

- A VCN within the region that will contain your Autonomous Database with shared Exadata infrastructure. Cannot be changed after provisioning.
- A private subnet within your VCN configured with default DHCP options. Cannot be changed after provisioning.
- At least 1 network security group (NSG) within your VCN for the Autonomous Database. Can be changed or edited after provisioning.

<https://docs.oracle.com/en-us/iaas/Content/Database/Concepts/adbsprivateaccess.htm>

NEW QUESTION 2

Which two methods can you use to create users and grant roles in Autonomous Database services? (Choose two.)

- A. through the Oracle Cloud Infrastructure service console
- B. through SQL Developer
- C. using DBMS_CLOUD_ADMIN package
- D. through SQLPlus

Answer: BD

Explanation:

<https://oracle-base.com/articles/vm/oracle-cloud-autonomous-data-warehouse-adw-create-service> <https://docs.oracle.com/en/cloud/paas/autonomous-data-warehouse-cloud/user/connect-sqlplus.html#GUID-A30> <https://docs.oracle.com/en/cloud/paas/autonomous-data-warehouse-cloud/user/connect-sql-dev.html#GUID-FB6> <https://docs.oracle.com/en/cloud/paas/autonomous-data-warehouse-cloud/user/dbms-cloud-admin.html#GUID-D>

NEW QUESTION 3

Which three statements are true about procedures in the DBMS_CLOUD package? (Choose three.)

- A. The DBMS_CLOUD.PUT_OBJECT procedure copies a file from Cloud Object Storage to the Autonomous Data Warehouse.
- B. The DBMS_CLOUD.CREATE_CREDENTIAL procedure stores Cloud Object Storage credentials in the Autonomous Data Warehouse database.
- C. The DBMS_CLOUD.VALIDATE_EXTERNAL_TABLE procedure validates the source files for an external table, generates log information, and stores the rows that do not match the format options specified for the external table in a badfile table on Autonomous Data Warehouse.
- D. The DBMS_CLOUD.DELETE_FILE procedure removes the credentials file from the Autonomous Data Warehouse database.
- E. The DBMS_CLOUD.CREATE_EXTERNAL_TABLE procedure creates an external table on files in the cloud.
- F. You can run queries on external data from the Autonomous Data Warehouse.

Answer: BCE

Explanation:**DELETE_FILE Procedure**

This procedure removes the specified file from the specified directory on Autonomous Data Warehouse.

CREATE_CREDENTIAL Procedure
This procedure stores Cloud Object Storage credentials in the Autonomous Data Warehouse database. Use stored credentials for data loading or for querying external data residing in the Cloud.

PUT_OBJECT Procedure

This procedure copies a file from Autonomous Data Warehouse to the Cloud Object Storage. The maximum file size allowed in this procedure is 5 gigabytes (GB).

VALIDATE_EXTERNAL_TABLE Procedure

This procedure validates the source files for an external table, generates log information, and stores the rows that do not match the format options specified for the external table in a badfile table on Autonomous Data Warehouse.

CREATE_EXTERNAL_TABLE Procedure

This procedure creates an external table on files in the Cloud. This allows you to run queries on external data from Autonomous Data Warehouse.

To use Data Pump from ADB, a credential identifying the Object Storage bucket to use must be defined with a DBMS_CLOUD.CREATE_CREDENTIAL function.

This will allow ADB to access objects that are stored in the object store, including dump files. To export an existing database to prepare for import into ADB, use the XTP command and add the exclude option for database functionality that is not recommended or supported in ADB. This will prevent errors during the import process.

This process is not automatic. And if the logs are not moved, you will receive a warning when running the MDB that the logs are not there. In this example, we're moving the log import.log to object store with a DBMS_CLOUD.PUT_OBJECT command.

VALIDATE_EXTERNAL_TABLE Procedure

This procedure validates the source files for an external table, generates log information, and stores the rows that do not match the format options specified for the external table in a badfile table on Autonomous Database. The overloaded form enables you to use the operation_id parameter.

PUT_OBJECT Procedure

This procedure copies a file from Autonomous Database to the Cloud Object Storage. The maximum file size allowed in this procedure is 5 gigabytes (GB).

DELETE_FILE Procedure

This procedure removes the specified file from the specified directory on Autonomous Database.

CREATE_EXTERNAL_TABLE Procedure

This procedure creates an external table on files in the Cloud. This allows you to run queries on external data from Autonomous Database.

NEW QUESTION 4

How can an Autonomous Database resource be provisioned without logging into the Oracle Cloud Infrastructure console?

- A. It cannot be done.
- B. Using Database Configuration Assistant (DBCA) on the database server.
- C. Using the Oracle Cloud Infrastructure Command Line interface tool or REST API calls.
- D. Connecting to the Cloud Infrastructure Command console via SSH wallet.

Answer: C

Explanation:

The CLI is a small footprint tool that you can use on its own or with the Console to complete Oracle Cloud Infrastructure tasks. The CLI provides the same core functionality as the Console, plus additional commands.

<https://blogs.oracle.com/datawarehousing/managing-autonomous-data-warehouse-using-oci-curl> Examples of using Autonomous Database managing by REST API

<https://oracle.github.io/learning-library/workshops/autonomous-transaction-processing/LabGuide900ConfigureO>

NEW QUESTION 5

When enabling auto-scaling, which three options do not change?

- A. Number of OCPUs displayed in the console.
- B. Amount of storage
- C. I/O resources
- D. parallelism settings
- E. Level of concurrency

Answer: DE

NEW QUESTION 6

According to Oracle documentation, it is a best practice when planning and instituting Access Controls for your Autonomous Dedicated environment regarding Subnets, Compartments and User Groups.

Which statement is true?

- A. Create a separate VCN that contains only public subnets
- B. Only 1 of each is allowed to be allocated per environment.
- C. Only 1 Subnet and 1 Compartment are allowed, multiple Groups highly advised.
- D. Create at least 2 of each resource

Answer: C

NEW QUESTION 7

You have a requirement to create an Autonomous Transaction Processing database that can support at least 200 concurrent statements per OCPU as well as parallelism.

Which service will you need to connect to?

- A. TPURGENT
- B. TP
- C. MEDIUM
- D. LOW

Answer: A

Explanation:

tpurgent: The highest priority application connection service for time critical transaction processing operations. This connection service supports manual parallelism.

<https://docs.oracle.com/en/cloud/paas/atp-cloud/atpug/connect-predefined.html#GUID-9747539B-FD46-44F1-8>

NEW QUESTION 8

Your customer wants to permanently disable scheduled maintenance on Autonomous Dedicated Infrastructure to keep their current database version(s). How can they achieve this?

- A. Change the Automatic Maintenance Schedule to 'None'd.
- B. Change the Automatic Maintenance Schedule to 'Specify a Schedule' but do not select any month, week or day.
- C. You cannot permanently disable scheduled Automatic Maintenance.
- D. Change the Automatic Maintenance Schedule to 'No Preference'.

Answer: B

NEW QUESTION 9

How do you change the tablespace quota for a user on Autonomous Database on Shared Infrastructure?

- A. Execute alter database for user MTHEO tablespace DATA quota = 10G;
- B. Execute alter user MTHEO quota unlimited on tablespace DATA;
- C. Execute DBMS_CLOUD_ADMI
- D. GRANT_TABLESPACE_QOOTA (username => 'MTHEO' ,Tablespace___quota => "UNLIMITED*");
- E. Execute alter tablespace DATA set quota = 10G;

Answer: D

NEW QUESTION 10

Which Autonomous Database Service is NOT used to connect to an Autonomous Transaction Processing instance?

- A. TPPERFORMANT
- B. MEDIUM
- C. HIGH
- D. LOW
- E. TPURGENT

Answer: A

Explanation:

Predefined Database Service Names for Autonomous Transaction Processing

The tnsnames.ora file provided with the credentials zip file contains five database service names identifiable as tpurgent, tp, high, medium, and low. The predefined service names provide different levels of performance and concurrency for Autonomous Transaction Processing.

- tpurgent: The highest priority application connection service for time critical transaction processing operations. This connection service supports manual parallelism.
 - tp: A typical application connection service for transaction processing operations. This connection service does not run with parallelism.
 - high: A high priority application connection service for reporting and batch operations. All operations run in parallel and are subject to queuing.
 - medium: A typical application connection service for reporting and batch operations. All operations run in parallel and are subject to queuing. Using this service the degree of parallelism is limited to four (4).
 - low: A lowest priority application connection service for reporting or batch processing operations. This connection service does not run with parallelism.
- <https://docs.oracle.com/en/cloud/paas/atp-cloud/atpug/manage-priorities.html#GUID-80E464A7-8ED4-45BB-A>

NEW QUESTION 10

What REST verb is used to create an Autonomous Database service using REST APIs?

- A. An "INSERT" REST call
- B. A "GET" REST call
- C. A "POST" REST call
- D. A "PUT" REST call

Answer: C

Explanation:

<https://docs.oracle.com/en/cloud/paas/integration-cloud/rest-api/SendRequests.html>

NEW QUESTION 11

Which two statements are correct about Autonomous Data Warehouse on Shared Exadata Infrastructure?

- A. Parallelism is not enabled by default.
- B. Compression is enabled by default
- C. Autonomous Data Warehouse uses Hybrid Columnar Compression for all tables by default.
- D. Oracle Database Result Cache is enabled by default for all SQL statements.
- E. You have direct access to the database node.

Answer: AB

NEW QUESTION 15

A new Python developer has joined your team and needs to access the Autonomous Database (ADB) data. How does the developer connect to and interact with ADB from Python?

- A. SQL Developer
- B. JAVA JDK
- C. You can't use Python with ADB.
- D. The Oracle Client and the cx_Oracle interface for Python

Answer: B

NEW QUESTION 16

What are two differentiators of Oracle Autonomous Database Dedicated Infrastructure?

- A. Users have OS access to the database machine.
- B. Users can customize the maintenance schedule.
- C. It offers greater control and isolation starting at the Exadata cloud infrastructure level.
- D. Users have SYS privileges in the database.
- E. Users can customize the OS stack and add additional packages

Answer: CD

NEW QUESTION 21

While creating an Autonomous Container Database on dedicated infrastructure through the Oracle Cloud Infrastructure (OCI) console, which patch type is offered to be applied during maintenance?

- A. Release Update (RU)
- B. Prior Release Update Revision (PRUR)
- C. Prior Release Update (PRU)
- D. Quarterly Bundle Patch (QBP)

Answer: A

NEW QUESTION 26

The Oracle Autonomous Database dedicated Exadata infrastructure feature is based upon which Oracle Cloud resources?

- A. Oracle Machine Learning Zeppelin Notebook, Autonomous Exadata Infrastructure, Fleet Administrator, Database Administrator,
- B. Virtual Cloud Network, Compartments, Policies, Autonomous Exadata Infrastructure
- C. Autonomous Exadata Infrastructure, Autonomous Backup, Autonomous Container Database, Autonomous Database
- D. Fleet Administrator, Database Administrator, Database User, Autonomous Exadata Infrastructure

Answer: A

NEW QUESTION 31

When working with an Autonomous Exadata Infrastructure supporting Autonomous Databases, where do you go to view the maintenance history of the Exadata?

- A. Under Core Infrastructure then Compute then Autonomous Exadata
- B. Under Solutions and Platform then Platform Services then Autonomous Exadata
- C. Under Database then Autonomous Transaction Processing then Autonomous Exadata
- D. Under Core Infrastructure then Autonomous Exadata

Answer: A

NEW QUESTION 32

What are three methods to load data into the Autonomous Database?

- A. Oracle GoldenGate
- B. Transportable Tablespace
- C. RMAN Restore
- D. Oracle Data Pump
- E. SQL*Loader

Answer: ADE

Explanation:

<https://www.oracle.com/database/technologies/datawarehouse-bigdata/adb-faqs.html#ATPD> <https://docs.oracle.com/en/cloud/paas/autonomous-data-warehouse-cloud/user/load-data-intro.html#GUID-5D2F>

NEW QUESTION 35

What is the correct way to list all files in the default data pump directory?

- A. By executing `select * from DBMS_CLOUD.LIST_FILES('DATA_PUMP_DIR');`
- B. You cannot list files in the default data pump directory from Autonomous Data Warehouse (ADW).
- C. Log onto ADW server and issue `ls -al` on the command line.
- D. By executing `select * from utl_file . list ('DATA_PUMP_DIR ') ;`

Answer: A

NEW QUESTION 37

You are the admin of an Autonomous Database (ADB) instance, and a new developer has requested a new workspace in APEX. What statement describes the step to provide the developer a new workspace in APEX?

- A. Create an IDCS user with the APEX role.
- B. Access the APEX Administration Services and create the workspace for the developer.
- C. Create a new developer account.
- D. Create a database user with the APEX role.

Answer: B

NEW QUESTION 42

What command should you issue to enable application continuity on Autonomous Database Shared Infrastructure?

- A. `alter database set application_continuity=true`
- B. `alter session set application_continuity=true`
- C. `exec dbms_cloucl_admi`
- D. `enable_app_cont (' <service_name> ') ;`
- E. `alter system set application_continuity=true`

Answer: D

NEW QUESTION 47

Which two options are available to restore an Autonomous Data Warehouse? (Choose two.)

- A. Backup and recovery must be done using Recovery Manager(RMAN).
- B. Select the snapshot of the backup.
- C. Select the archived redo logs.


- D. Select the backup from which restore needs to be done.
E. Specify the point in time (timestamp) to restore.

Answer: DE

Explanation:

In the Restore prompt, select Specify Timestamp or Select Backup to restore to a point in time or to restore from a specified backup.

<https://docs.oracle.com/en/cloud/paas/autonomous-data-warehouse-cloud/user/backup-recover.html#GUID-78>

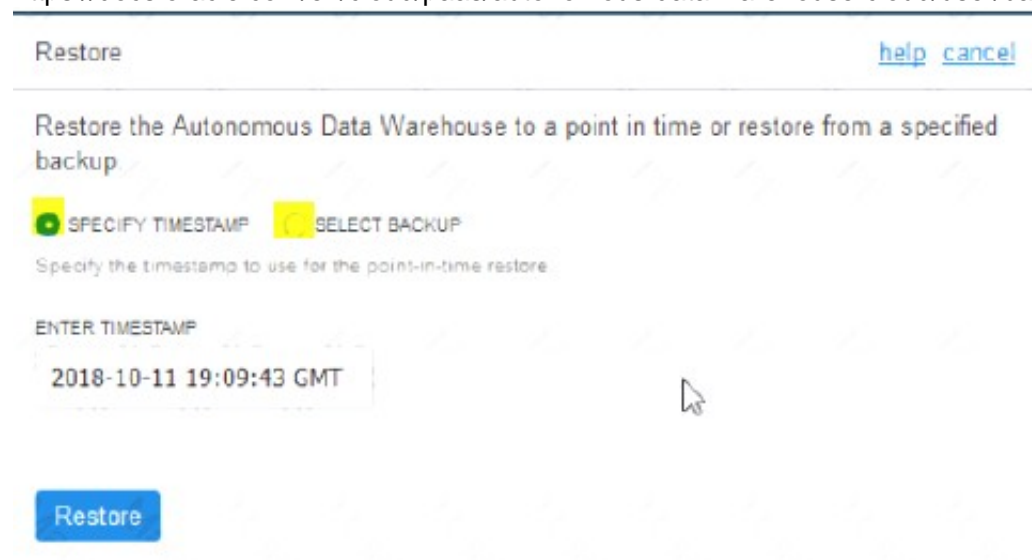

NEW QUESTION 50

Which statement is NOT correct when using Automatic Indexing on Autonomous Data Warehouse?

- A. Process includes identify candidates, create invisible auto indexes , verify with implement if performance improved and delete unused.
B. You can use the dbms_auto_index package to report on the automatic task and to set your preferences.
C. It is enabled by default.
D. You can control behavior at the statement level using the use_aoto_indexes or NO_USE_AUTO_INDEXES hints.
E. The indexing feature is implemented as an automatic task that runs at a fixed interval.

Answer: E

NEW QUESTION 54

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 1z0-931-20 Exam with Our Prep Materials Via below:

<https://www.certleader.com/1z0-931-20-dumps.html>