

Exam Questions 1Y0-204

Citrix Virtual Apps and Desktops 7 Administration

<https://www.2passeasy.com/dumps/1Y0-204/>



NEW QUESTION 1

Scenario: Users report that they are receiving new sessions instead of reconnecting to their disconnected sessions. A Citrix Administrator investigates the issues and finds the sessions are in a disconnected state when the users leave work.

What should the administrator configure to allow the users to reconnect to their disconnected sessions while roaming?

- A. Session Pre-launch
- B. Workspace Control
- C. Session Lingering
- D. Session Timeout

Answer: B

NEW QUESTION 2

Scenario: A Citrix Administrator previously configured a Citrix Virtual Desktops Site to use evaluation licenses. The administrator then installed valid advanced licenses on the Citrix License Server and confirmed that licenses show correctly in the licensing console. However, a user reports an issue about logging on to the published desktop. The user receives an error message stating that the evaluation license is about to expire.

What should the administrator do to fix this issue?

- A. Restart the License service.
- B. Verify the host name entry in the license file.
- C. Remove the evaluation license.
- D. Change the product edition in Citrix Studio.

Answer: D

NEW QUESTION 3

Scenario: A Citrix Administrator manages a Citrix Gateway with a Standard Platform License, with remote employees in the environment. The administrator wants to increase employee access by 300 users through the Citrix Gateway, using VPN access.

Which license should the administrator recommend purchasing for this environment?

- A. Citrix ADC Burst Packs License
- B. Citrix ADC Upgrade License
- C. Citrix Gateway Universal License
- D. Citrix Gateway Express License

Answer: C

NEW QUESTION 4

Scenario: A Citrix Administrator has made changes to the Citrix ADC, deleting parts of the configuration, and then saved the new configurations. The changes caused an outage which needs to be resolved as quickly as possible. There is no Citrix ADC backup.

What does the administrator need to do to recover the configuration quickly?

- A. Restore from revision history.
- B. Restart the Citrix ADC.
- C. Run HA file synchronization.
- D. Run Save v/s Running configuration.

Answer: A

NEW QUESTION 5

Scenario: A Citrix Administrator of a large, multi-domain company needs to configure specific Group Policy Object (GPO) settings for Citrix Workspace app (Receiver) on managed endpoints that are in various locations. The administrator needs to have the ability to save the GPO template file to the Active Directory central store, so that Group Policy Administrators located in other domains can utilize it.

Which step should the administrator take to accomplish this task?

- A. Use the available Receiver ADMX and ADML template to configure the required settings locally.
- B. Use the available Receiver ADML template to configure the required settings at the domain level.
- C. Use the available Receiver ADML template to configure the required settings locally.
- D. Use the available Receiver ADMX and ADML template to configure the required settings at the domain level.

Answer: D

NEW QUESTION 6

Which three statements are correct regarding Citrix printing? (Choose three.)

- A. Citrix printing does NOT assign each printer a unique namespace within a given session.
- B. The Citrix Print Manager Service monitors session events, such as logon and logoffs or session termination.
- C. Citrix printing sets the default security descriptor for auto-created printers to ensure client printer security.
- D. Citrix printing allows administrators, but NOT users, to print to any other users' active session client printers.
- E. The Citrix Print Manager Service handles requests by impersonating the actual session user.


Answer: BCE

NEW QUESTION 7

A Citrix Administrator complains that between the two rewrite policies bound to the vserver, only one policy, whichever has lower priority, works. The other policy is

never used.

Click the 'Exhibit' button to view the screenshot of the relevant policy binding.

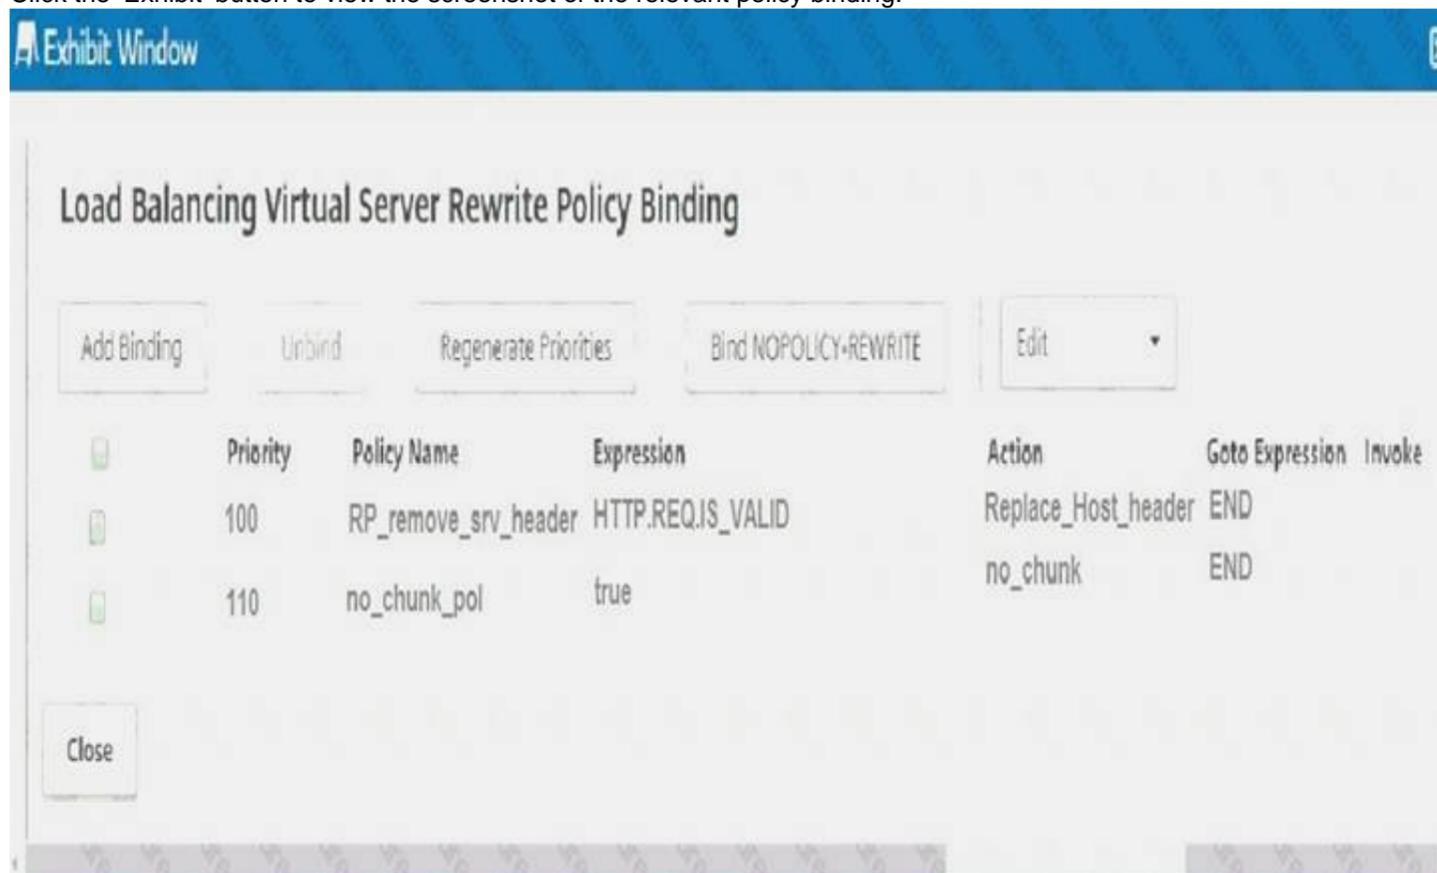

What is the cause of the issue?

- A. The Invoke label is NOT configured.
- B. GotoExpression value for Policy RP_remove_srv_header is configured as 'END'.
- C. The Policy expression of the no_chunk_pol is 'true' and 'NOT HTTP.REQ.IS_VALID'.
- D. The Priority of the no_chunk_pol is a higher numeric value than 100.

Answer: C

NEW QUESTION 8

What are three valid ways to configure Virtual Delivery Agent (VDA) registration? (Choose three.)

- A. CONFIG.XML file
- B. Group Policy Object (GPO)
- C. Organizational Unit (OU) based Controller discovery
- D. DHCP Options
- E. MCS-based PERSONALITY.INI

Answer: BCE

NEW QUESTION 9

After creating a new machine catalog using the Machine Creation Services (MCS) wizard in Citrix Studio, a Citrix Administrator determines that Windows activation fails for all new machines in that catalog.

Which two conditions can cause this to happen? (Choose two.)

- A. The base image rearm count has been exceeded.
- B. The Microsoft License Server is unreachable.
- C. The version of Windows installed uses Multiple Activation Key (MAK) licensing.
- D. The version of Windows installed is Windows Server 2012 R2.

Answer: BC

NEW QUESTION 10

A Citrix Administrator needs to match the host name 'www.example.com' in all HTTP requests. Which expression, when used, meets this requirement?

- A. HTTP.REQ.HOSTNAME.EQ("www.example.com")
- B. HTTP.REQ.HOSTNAME("example.com")
- C. HTTP.RES.HOSTNAME.CONTAINS("www.example.com")
- D. HTTP.RES.HOSTNAME.EQ("www.example.com")

Answer: A

NEW QUESTION 10

Which account is used by FlexCast Management Architecture (FMA) services to access the Citrix Virtual Apps and Desktops SQL databases?

- A. Delivery Controller's machine account
- B. Local System account
- C. Network Service account
- D. Domain user account

Answer: A

NEW QUESTION 15

Scenario: A Citrix Administrator needs to configure StoreFront to allow external users access to internal resources. The external users will authenticate on StoreFront.

Which StoreFront authentication method can the administrator configure?

- A. Smart card
- B. Pass-through from NetScaler Gateway
- C. HTTP Basic
- D. Username and password

Answer: B

NEW QUESTION 17

Scenario: A Citrix Administrator needs to reduce costs by limiting users' printing sources. The administrator needs to stop automatic creation of all client printers in a session and map printers based on the floor of the building from which the user's session connects.

Which two policies should the administrator configure to complete this task? (Choose two.)

- A. Printer properties retention
- B. Auto-create client printers
- C. Direct connections to print servers
- D. Session printers

Answer: CD

NEW QUESTION 18

Which tool can a Citrix Administrator utilize to verify that a policy is bound and showing the number of hits?

- A. nstcpdump.sh
- B. nstrace.sh
- C. nsconmsg
- D. nscollect

Answer: C

NEW QUESTION 20

Scenario: A Citrix Administrator currently manages a Citrix ADC environment in a retail company that is growing quickly and may soon double its volume of business. Currently, a Citrix ADC MPX 5550, which handles web and SSL transactions, is in place, but is close to full capacity. Due to the forecasted growth increase, the administrator needs to find a cost effective solution.

What can the administrator recommend to management in order to cost effectively handle the growth?

- A. Another MPX 5550 appliance
- B. Performance hardware upgrade to Citrix ADC SDX 14100
- C. Perform license upgrade to Citrix ADC MPX 5650
- D. Perform hardware upgrade to Citrix ADC MPX 8005

Answer: C

NEW QUESTION 23

A Citrix Administrator is in the process of installing Citrix Cloud Connector, but the installation fails. What could be causing the Citrix Cloud Connector installation to fail on the machine?

- A. It is in sync with UTC time instead of local time.
- B. Enhanced Security Configuration (ESC) is set to 'off'.
- C. It cannot run on a machine template cloned across multiple machines.
- D. It is NOT joined to the domain.

Answer: D

NEW QUESTION 25

Which step can a Citrix Administrator take in order to use the default compression policies?

- A. Bind the default compression policies to the virtual server.
- B. Enable compression on the associated bound services.
- C. Disable the Citrix ADC Compression feature at a global level.
- D. Select the compression algorithm (gzip/deflate/identity).

Answer: A

NEW QUESTION 30

Scenario: A Citrix Administrator has executed the following command:

```
set httpcallout httpcallout1 -cacheForSecs 120
```

What will be the effect of this command?

- A. The cache duration of the HTTP request is set to 120 seconds.
- B. The cache duration of the HTTP callout request is set to 120 seconds.
- C. The cache duration of the HTTP response is set to 120 seconds.
- D. The cache duration of the HTTP callout response is set to 120 seconds.

Answer: D

NEW QUESTION 35

Which PowerShell command should a Citrix Administrator run to obtain the name of a deployment, the local host cache configuration and the license level?

- A. Get-BrokerCatalog
- B. Get-BrokerController
- C. Get-BrokerResource
- D. Get-BrokerSite

Answer: D

NEW QUESTION 38

Scenario: A Citrix ADC MPX is using one of four 10G ports available in an environment. A Citrix Administrator found a traffic bottleneck at the Citrix ADC. What can the administrator do to increase bandwidth on the Citrix ADC?

- A. Add another 10G Citrix ADC port to the switch and configure Link Aggregation Control Protocol (LACP).
- B. Purchase another Citrix ADC MPX appliance.
- C. Add two more 10 Citrix ADC ports to the network and configure VLAN.
- D. Plug another 10G Citrix ADC port into the router.

Answer: A

NEW QUESTION 39

In a Global Server Load Balancing (GSLB) Active/Active environment, the connection proxy is used as the site persistence method. What is used to source the traffic when connection is proxied?

- A. Client source IP
- B. LDNS IP Address
- C. Virtual IP (VIP)
- D. Subnet IP (SNIP)

Answer: D

NEW QUESTION 44

Which two options should a Citrix Administrator configure to stop the First-Time wizard from automatically popping up? (Choose two.)

- A. Host Name is NOT configured on the appliance.
- B. The Default Admin Password has NOT been changed.
- C. Licenses are NOT present on the appliance.
- D. The appliance is configured with the default IP address (192.168.100.1)

Answer: CD

NEW QUESTION 47

Which two actions must be true for a client to connect to an SSL offload virtual server without any SSL errors? (Choose two.)

- A. The Root Certificate is installed on the client's device.
- B. The Server Certificate is from a private certificate authority (CA).
- C. The Server Certificate is bound to the load-balancing virtual server.
- D. The Root Certificate is installed on the Citrix ADC.

Answer: AC

NEW QUESTION 50

Which Citrix ADC Access Control List (ACL) command can a Citrix Administrator use to bridge traffic originating from 192.168.10.200?

- A. add ns simpleacl6
- B. add ns acl6
- C. add ns acl
- D. add ns simpleacl

Answer: C

NEW QUESTION 52

Which mode on the Citrix ADC can a Citrix Administrator utilize to avoid asymmetrical packet flows and multiple route/ARP lookups?

- A. Use Subnet IP (USNIP)
- B. MAC-based forwarding (MBF)
- C. Layer 2

D. Layer 3

Answer: B

NEW QUESTION 54

Which console can a Citrix Administrator use to provide customized permissions to a junior administrator for adding applications?

- A. Citrix Studio
- B. StoreFront
- C. Citrix Director
- D. Citrix Application Delivery Management

Answer: A

NEW QUESTION 55

Scenario: A Citrix Administrator is in the process of migrating the existing 7.15 LTSR Virtual Delivery Agent (VDA) machines used on premises to Citrix Cloud. The administrator has created a new manual machine catalog and Delivery Group in Citrix Cloud and pointed to the existing Device Collection in Citrix Provisioning. The administrator also restarted the VDA machines.

What could prevent the VDA machines from registering in Citrix Cloud?

- A. The VDA master image was NOT updated to communicate with the Cloud Connectors.
- B. One of the two Cloud Connectors is down and unresponsive.
- C. The Citrix policies have NOT been migrated to Citrix Cloud.
- D. The VDA on the master image has NOT been updated to a later version.

Answer: A

NEW QUESTION 60

Scenario: A Citrix ADC receives packets that are destined for a MAC address owned by the Citrix ADC. The destination IP address of the packets does NOT belong to the Citrix ADC. Layer 3 Mode is enabled by default on the Citrix ADC.

What will the Citrix ADC do with the packets in this scenario?

- A. Drop the packets
- B. Bridge the packets.
- C. Route the packets.
- D. Process the packets.

Answer: C

NEW QUESTION 62

A user calls the help desk and states that launching a pooled random desktop takes as long as five minutes. Which Citrix Director report can a Citrix Administrator review to find out what might be causing the delay?

- A. Resource Utilization
- B. Connection Failures
- C. Logon Performance
- D. Load Evaluators

Answer: C

NEW QUESTION 65

Scenario: A Citrix Administrator has received user complaints about issues connecting to the domain through the Citrix ADC using AAA. The administrator investigated the issue and found that the domain session cookie that was used during authentication is failing due to resolution issues.

What can the administrator do to fix the issue?

- A. Configure DNS to assign authentication and traffic management virtual servers to FQDNs in the domain.
- B. Configure FQDNs for the Session Cookies in the domain.
- C. Change the Session Cookie timeout in DNS.
- D. Configure DNS to assign an FQDN for the Citrix ADC in the domain.

Answer: A

NEW QUESTION 66

Scenario: The Director of network security in a financial organization wants to protect the enterprise network from any external malware threats. To do this, the director needs to gain visibility into otherwise-bypassed traffic and control access to malicious web sites. The director is required to do the following:

- Intercept and examine all the traffic, including SSL/TLS (encrypted traffic), coming in, and going out of the enterprise network.
- Block access to URLs identified as serving harmful or insecure content.
- Identify users (employees) in the enterprise who are accessing malicious websites.

Which Citrix ADC deployment mode should a Citrix Administrator use to achieve this requirement?

- A. Default Gateway
- B. Citrix Secure Web Gateway
- C. Citrix Gateway
- D. Access Gateway

Answer: B

NEW QUESTION 67

Scenario: A Citrix Administrator has been advised that additional Windows users will need to access the on-premises Citrix Virtual Apps and Desktop Site. The Site utilizes Citrix Profile Management for all users. The new users have been using Windows Roaming Profiles and will need their existing profile information when they use the Citrix Site. The administrator enables the Profile Management policy setting for 'Enable Migration of Existing Profiles'.

At which stage will the new users' Roaming Profiles be migrated to the existing Profile Management store?

- A. When the new policy is updated automatically in Active Directory after 90 minutes
- B. When the new users initiate their first domain authentication
- C. When the Virtual Delivery Agent (VDA) machines configured with the new policy are restarted
- D. When the new users initiate their first logon to a Virtual Delivery Agent (VDA) machine

Answer: A

NEW QUESTION 72

Scenario: Client connections to certain virtual servers are abnormally high. A Citrix Administrator needs to be alerted whenever the connections pass a certain threshold.

How can the administrator use Citrix Application Delivery Management to accomplish this requirement?

- A. Configure TCP Insight on the Citrix Application Delivery Management.
- B. Configure specific alerts for virtual servers using Citrix Application Delivery Management.
- C. Configure SMTP Reporting on the Citrix Application Delivery Management by adding the threshold and email address.
- D. Configure Network Reporting on the Citrix Application Delivery Management by setting the threshold and email address.

Answer: D

NEW QUESTION 75

Scenario: A Citrix Administrator is enabling TLS Secure connections between the Cloud Connectors and on-premises StoreFront. After configuring the TLS certificate on all Cloud Connectors and disabling HTTP connections, the administrator finds that no resources are being enumerated.

Which extra step does the administrator need to take to allow enumeration to work between on-premises StoreFront and Citrix Cloud?


- A. Configure Internet Information Services (IIS) on the StoreFront server to use HTTPS.
- B. Change transport type to HTTPS in the StoreFront store DDC list.
- C. Configure Cloud Connectors to allow unsecured connections.
- D. Install Internet Information Services (IIS) on the Cloud Connector.

Answer: B

NEW QUESTION 76

Which Front-End Optimization (FEO) action can a Citrix Administrator use to achieve the results shown in the screenshots?

Click the Exhibit button to view the screenshots.

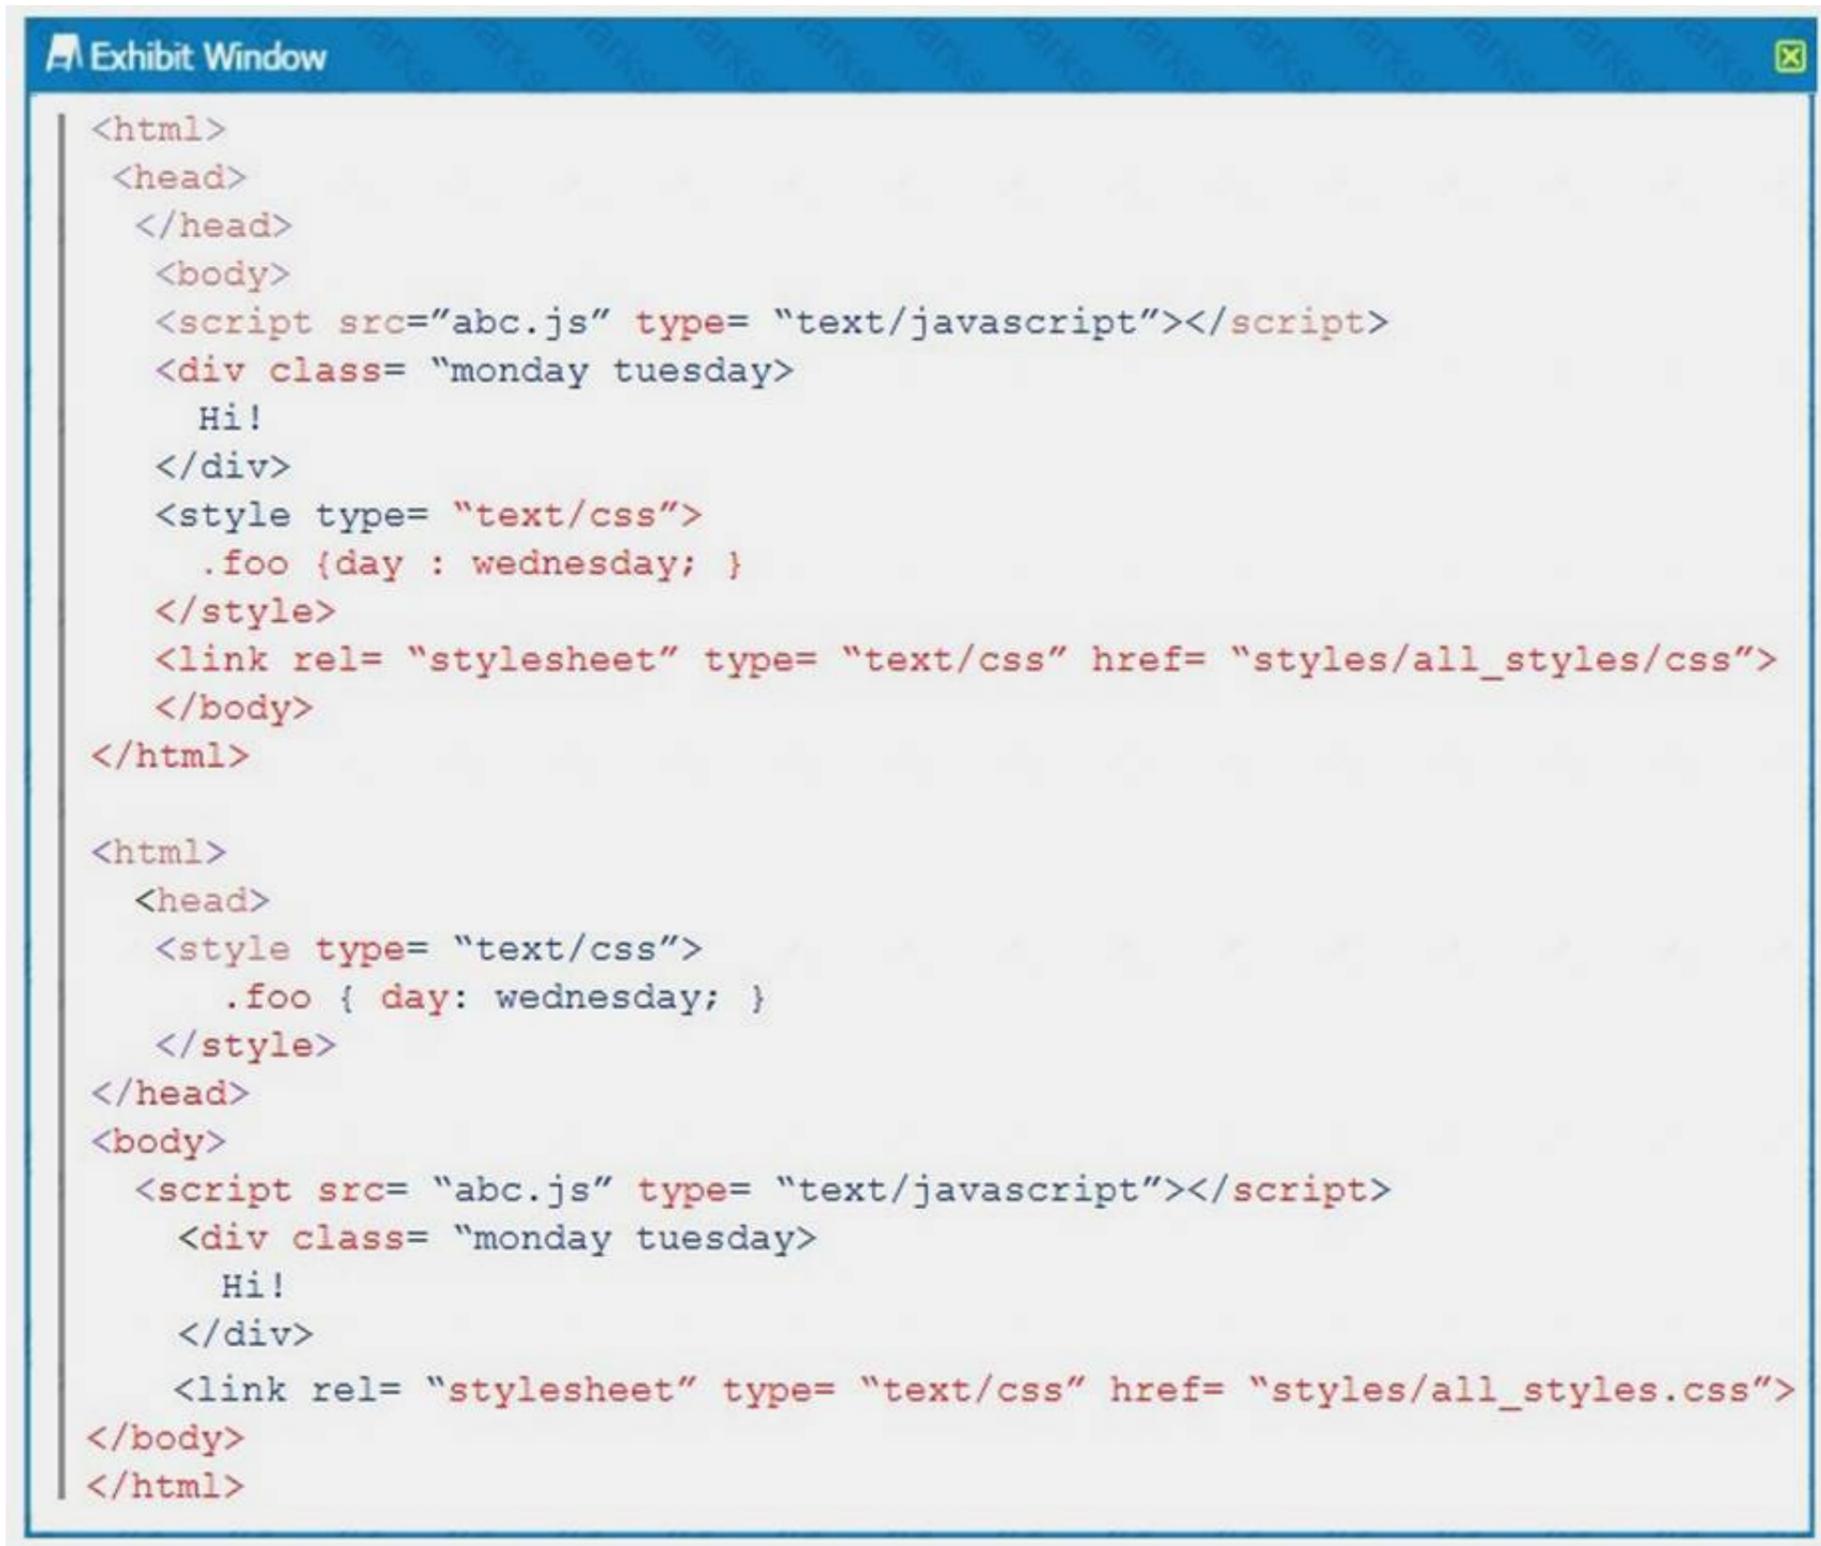

```
<html>
<head>
</head>
<body>
<script src="abc.js" type="text/javascript"></script>
<div class="monday tuesday">
  Hi!
</div>
<style type="text/css">
  .foo {day : wednesday; }
</style>
<link rel="stylesheet" type="text/css" href="styles/all_styles/css">
</body>
</html>

<html>
<head>
<style type="text/css">
  .foo { day: wednesday; }
</style>
</head>
<body>
<script src="abc.js" type="text/javascript"></script>
<div class="monday tuesday">
  Hi!
</div>
<link rel="stylesheet" type="text/css" href="styles/all_styles.css">
</body>
</html>
```

- A. Truncate CSS
- B. Inline CSS
- C. Move CSS to head
- D. Rearrange CSS

Answer: B

NEW QUESTION 77

A Citrix Administrator configured the Responder policy to redirect the request for root page to the home page. However, after executing the command, the webpage access entered a loop, as shown in the second screenshot. Click on the 'Exhibit' buttons to view the screenshots.

```
>
>
> add responder action rs_redirect_home_act redirect "\ http://server1.training.lab/home.php
\"" -responseStatusCode 302

Done


> add responder policy rs_redirect_home_pol HTTP.REQ.IS_VALID res_redirect_home_act

Done

> bind lb vserver lb_vsrv_www -policyName rs_redirect_home_pol -priority 100 -
gotoPriorityExpression END -type REQUEST

Done

>
>
```

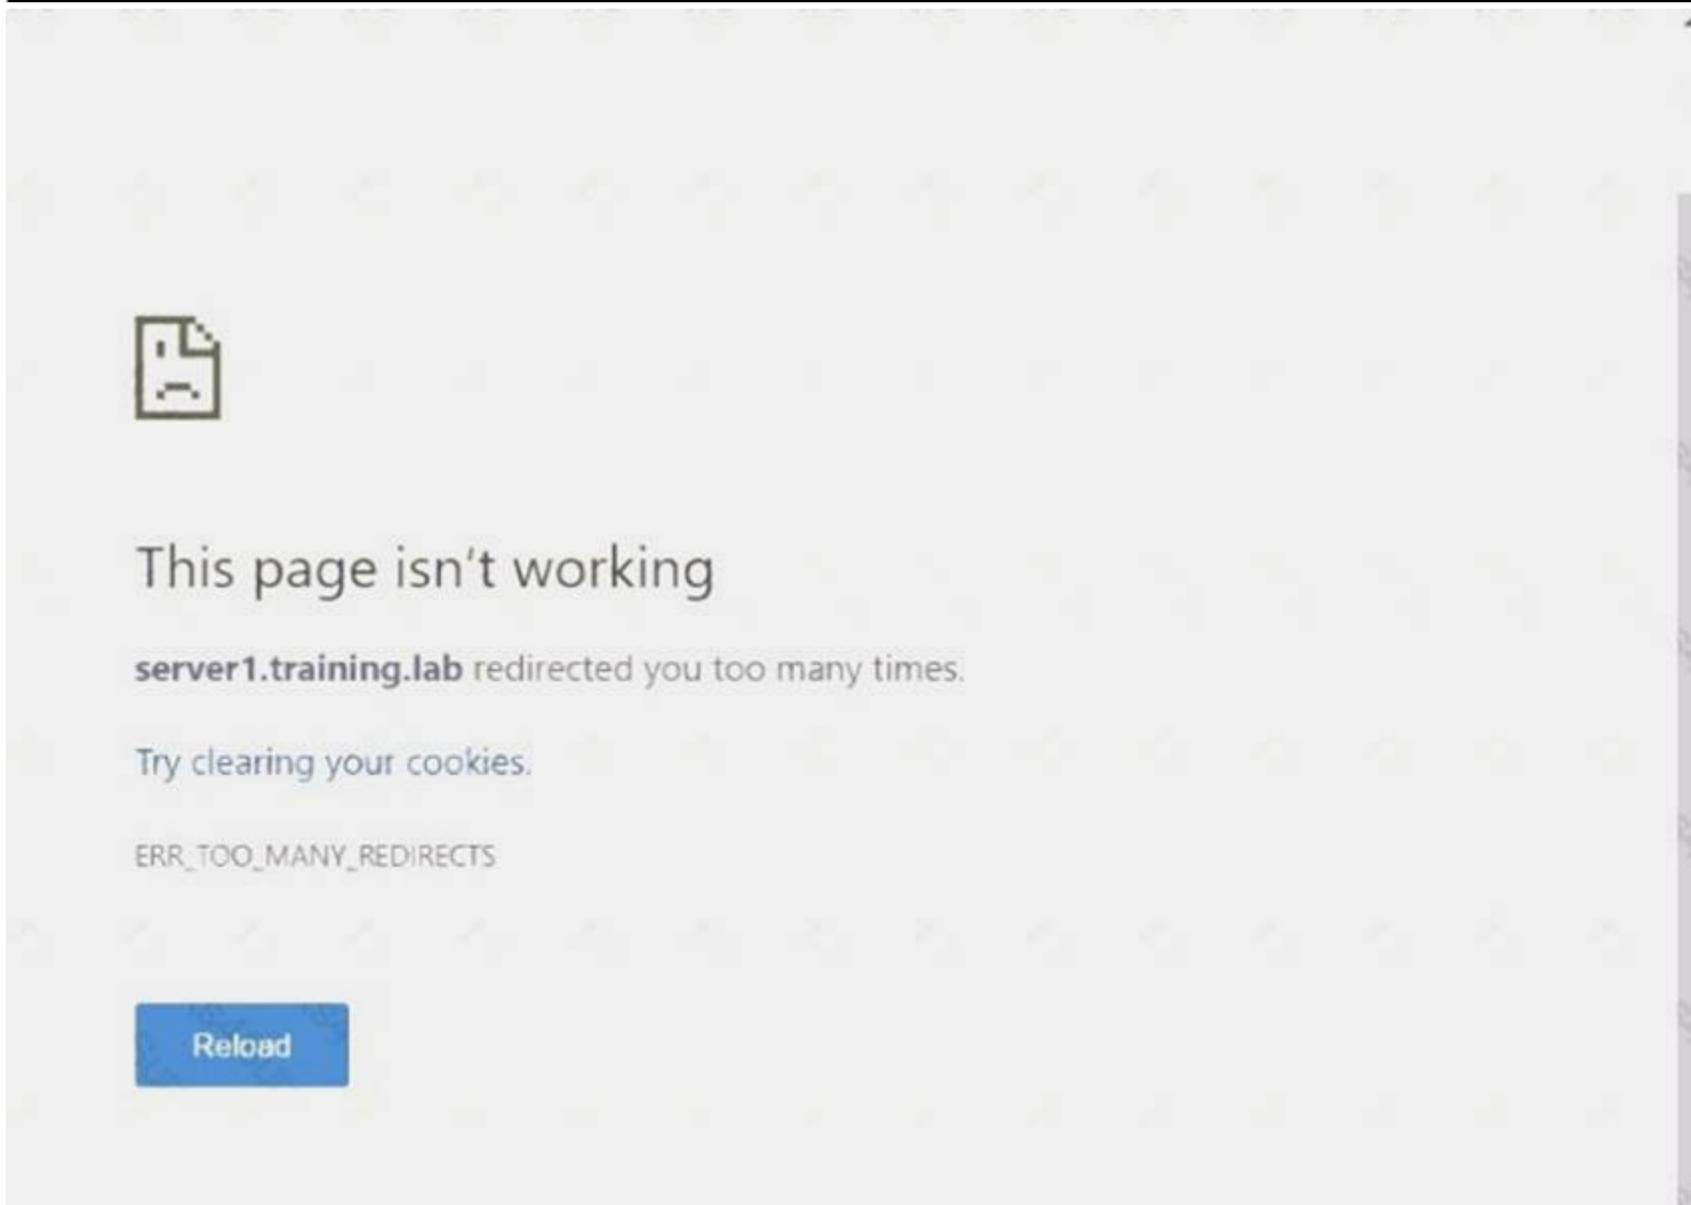

How will the administrator rectify this issue?

- A. Change Responder action expression to "/"
- B. Change Responder Policy expression to http.REQ.URL.Contains("/")
- C. Change Responder Action expression to http.REQ.URL
- D. Change Responder Policy expression to http.REQ.URL.EQ("/")

Answer: D

NEW QUESTION 82

What is the effect of the "set cs vserver vserver-CS-1 --redirectURL http://www.newdomain.com/mysite/" command?

- A. All the requests without url path /mysite/ will be redirected to http://www.newdomain.com/mysite/.
- B. All the requests to vserver-CS-1 will be redirected to http://www.newdomain.com/mysite/.
- C. If the vserver-CS-1 encounters high connection rate, then users will be redirected to http://www.newdomain.com/mysite/.

D. If the status of vserver-CS-1 is DOWN, then users will be redirected to <http://www.newdomain.com/mysite/>.

Answer: D

NEW QUESTION 84

A Citrix Administrator is configuring a Citrix ADC high availability (HA) pair and needs to ensure that one Citrix ADC is UP and primary at all times to ensure the business websites are always available.

What does the administrator need to do to ensure that the Citrix ADCs still handle web traffic in the event that both nodes become unavailable or fail a health check?

- A. Disable HA Fail-safe mode on the Primary Citrix ADC only.
- B. Configure HA Fail-safe mode on each Citrix ADC independently.
- C. Configure HA Fail-safe mode on the Primary Citrix ADC only.
- D. Disable HA Fail-safe mode on the Secondary Citrix ADC.

Answer: B

NEW QUESTION 87

Scenario: A Citrix Administrator has deployed a Citrix Cloud-managed Citrix Virtual Apps and Desktops Site with one on-premises resource location and two Cloud Connectors. An on-premises StoreFront server group is used to access published resources. During user acceptance testing, due to adverse weather conditions, network connectivity between the on-premises location and Citrix Cloud was broken for several hours.

Which statement describes what will occur in this scenario?

- A. One of the Citrix Cloud Connectors at the resource location is elected to be the primary broker and uses its Local Host Cache to broker new sessions and manage existing HDX connections.
- B. Users will NOT be able to access published resources, and existing sessions will be disconnected until network connectivity to Citrix Cloud is restored.
- C. The Citrix Cloud Connectors at the resource location will continue to manage existing sessions, but no new sessions can be initiated until network connectivity to Citrix Cloud is restored.
- D. Each Citrix Cloud Connector at the resource location will continue to broker new connections, for certain FlexCast models, using Connection Leasing and existing HDX connections will NOT be impacted.

Answer: A

NEW QUESTION 89

Scenario: A Citrix Administrator received reports from users regarding published applications freezing and crashing randomly within their Virtual Delivery Agent (VDA) machine sessions. The administrator would like to review the history of applications that have crashed recently.

Which step can the administrator take to gather the necessary information from within Citrix Director?

- A. Review Failed Server OS Machines under Dashboard.
- B. Configure Application Faults under Trends.
- C. Configure Application Errors under Trends.
- D. Review Citrix Alerts under Alerts.

Answer: B

NEW QUESTION 91

Which step does a Citrix Administrator need to take to enable Citrix XML Service trust for user access within a Citrix Virtual Apps and Desktops infrastructure?

- A. Enable XML Service trust using the StoreFront console.
- B. Run the `Set-BrokerSite -TrustRequestsSentToTheXMLServicePort $true` PowerShell command from within a Virtual Delivery Agent (VDA) machine.
- C. Run the `Set-BrokerSite -TrustRequestsSentToTheXMLServicePort $true` PowerShell command from within a Controller.
- D. Configure the appropriate XML Service trust settings using HDX policy within Citrix Studio.

Answer: C

NEW QUESTION 94

How can a Citrix Administrator configure a rewrite policy to change the version of HTTP from HTTP 1.1 to HTTP 1.0 in every request?

- A
- ```
add rewrite action RW_ACT replace http.req.version "\"HTTP/1.0\""
add rewrite policy RW_POL true RW_ACT
```
- B
- ```
add rewrite action RW_ACT replace http.res.version "\"HTTP/1.0\""  
add rewrite policy RW_POL true RW_ACT
```
- C
- ```
add rewrite action RW_ACT replace http.res.version "\"HTTP/1.1\""
add rewrite policy RW_POL true RW_ACT
```
- D
- ```
add rewrite action RW_ACT replace http.req.version "\"HTTP/1.1\""  
add rewrite policy RW_POL true RW_ACT
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 96

Scenario: A Citrix Administrator is configuring the Workspace Experience to provide users with access to their applications and desktops. The administrator deployed Microsoft Azure Active Directory (AD) already and wants to leverage it to support user access to the Workspace Experience.

Which two steps does the administrator need to take to enable users to authenticate using Azure AD to the Workspace Experience? (Choose two.)

- A. Add Cloud Connector information to the Azure AD console.
- B. Enable Azure AD authentication under Workspace Configuration in Citrix Cloud.
- C. Add Azure AD Account under Identity Providers in Citrix Cloud.
- D. Deploy Cloud Connectors to support Azure AD authentication.

Answer: BC

NEW QUESTION 97

Scenario: A Citrix Administrator configured the "-denySSLReneg" Parameter using the below command on Citrix ADC to enhance security.
set ssl parameter -denySSLReneg <option>

Which two options can the administrator use to complete the command? (Choose two.)

- A. NONSECURE
- B. HIGHSECURE
- C. FRONTEND_CLIENT
- D. NO
- E. ALL

Answer: AC

NEW QUESTION 101

Scenario: A Citrix Administrator needs to deploy 300 virtual Windows 10 desktops in an environment. The deployment should have a low impact on the existing network infrastructure. The environment also requires user-installed applications and persistency.

Which Citrix technology can the administrator use to provision the desktops?

- A. Citrix Provisioning
- B. Existing Machines
- C. Machine Creation Services
- D. Manual Provisioning

Answer: C

NEW QUESTION 102

What is the first thing a Citrix Administrator should create when creating a Server Certificate for Citrix ADC to secure traffic?

- A. A Private Key

- B. A Certificate key-pair
- C. A Certificate Signing Request
- D. A Certificate Revocation list

Answer: C

NEW QUESTION 105

Scenario: A Citrix Administrator has enabled an HDX Session printers policy within a Citrix Virtual Apps and Desktops Site. The administrator added a printer to a print server and assigned the printer to all users through a session printer policy. In addition, several local client printers are auto-created within HDX sessions. No other printing policies are configured.

How will print jobs be routed when users send print jobs to a printer managed by the print server?

- A. Directly to the network print server and then to the specified printer.
- B. Over the HDX virtual channel to the specified printer attached to the print server.
- C. Directly from the session Virtual Delivery Agent (VDA) machine to the printer.
- D. Over the HDX virtual channel, through the endpoint, and then to the print server.

Answer: A

NEW QUESTION 106

What must a Citrix Administrator do to encrypt XML traffic between StoreFront and the Delivery Controllers?

- A. Install a private server certificate on each StoreFront server and then add a new Internet Information Services (IIS) binding for HTTPS.
- B. Install a private server certificate on each Delivery Controller and bind the certificates to port 443.
- C. Install a private certificate on each Delivery Controller and StoreFront server
- D. Restart each server to force XML communication to be encrypted.
- E. Install a private server certificate on each StoreFront server
- F. Open the StoreFront console and use the https:// prefix with the base URL.

Answer: A

NEW QUESTION 109

Scenario: A Citrix Administrator has received complaints from published application users. They report that it takes a long time to relaunch an application after they close it by mistake.

The administrator needs a solution that will reduce application launch times in these situations. Which feature should the administrator enable?

- A. Session Sharing
- B. Session Reliability
- C. Application Lingering
- D. Application Prelaunch

Answer: D

NEW QUESTION 111

Scenario: A Citrix Administrator configured the following policies in a Citrix Virtual Desktops Site environment, in descending priority order.

1. "Marketing Office A" has a filter on Marketing users. 'Client Network Drives' is disabled; 'Client Fixed Drives' is enabled.
2. "Marketing Office B" has a filter on Marketing users' internal IP. 'Client Network Drives' is disabled; 'Client Fixed Drives' is enabled.
3. "Accounting" has a filter on Accounting Users. 'Client Network Drives' is enabled; 'Client Fixed Drives' is NOT configured.
4. "Baseline" is configured without a filter. 'Client Network Drives' and 'Client Fixed Drives' are both disabled.

Based on these policies, what will Accounting users be able to access?

- A. Client network drives only
- B. Neither the client network drive nor the client fixed drive
- C. Client fixed drives only
- D. Client fixed and network drives

Answer: A

NEW QUESTION 115

Which three methods can a Citrix Administrator choose from when creating a Featured App Group for a set of applications? (Choose three.)

- A. Application names
- B. Installed locally
- C. Keyword
- D. Application category
- E. Delivery Group

Answer: ACD

Explanation:

You can create product featured app groups for your end users that are related to or fit in a specific category. For example, you can create a Sales Department featured app group containing applications that are used by that department. You can define featured apps in the StoreFront administration console by using application names or by using keywords or application categories that were defined in the Studio console.

NEW QUESTION 119

Scenario: A Citrix Administrator needs to add 10 new web servers to an existing server farm. The new servers are configured to serve the same applications and connections and are twice the capacity of the existing servers. The administrator wants to ensure that they are being fully utilized. Currently in the environment, the

default load-balancing method is being used.

To ensure that only the 10 new servers are receiving twice the connections of the old servers without changing the load balancing to the rest of the environment, the administrator needs to add a weight of to the services attached to the servers. (Choose the correct option to complete the sentence.)

- A. 50; new
- B. 2; old
- C. 50; old
- D. 2; new

Answer: D

NEW QUESTION 121

Scenario: A Citrix Administrator is working on a published application. The network connection remains active for 240 seconds but is interrupted and applications become unusable. The session then prompts for authentication. After the administrator successfully authenticates, the session is reconnected.

Which policy makes this possible?

- A. Load Management
- B. Auto Client Reconnect
- C. Session Reliability
- D. ICA Keep Alive

Answer: C

NEW QUESTION 122

Scenario: A Citrix Administrator has configured a Citrix ADC active-passive high availability (HA) pair. When the HA pair fails over, customers are unable to access the hosted websites. After some troubleshooting, the administrator found that the upstream router was NOT updating its ARP table.

What can the administrator configure to resolve this issue?

- A. Virtual MAC
- B. Independent Network Configuration (INC) mode
- C. Route Monitor
- D. HA monitor

Answer: A

NEW QUESTION 127

For which three components can Citrix Director capture utilization statistics? (Choose three.)

- A. CPU
- B. IOPS
- C. Disk space
- D. Network
- E. Memory

Answer: ABE

NEW QUESTION 128

Which Citrix ADC hardware or software platform offers a Multi-Tenant solution?

- A. VPX
- B. MPX
- C. CPX
- D. SDX

Answer: D

NEW QUESTION 133

Scenario: A Citrix Administrator needs to create local user accounts for other administrators with limited privileges. The other administrators will need only:

- > Read-only access
- > The ability to enable and disable services and servers

Which built-in Command Policy permission level can the administrator use?

- A. Network
- B. Read-Only
- C. Operator
- D. Sysadmin

Answer: C

NEW QUESTION 138

Scenario: A Citrix ADC is configured with Interface 1/1 and bound to VLAN 40. A Citrix Administrator has executed the following command: bind vlan 20 -ifnum 1/1
What is the result of executing the command on the Citrix ADC?

- A. Interface 1/1 is bound to VLAN 20, and native VLAN is 1.
- B. Interface 1/1 is bound to VLAN 20, and native VLAN is 40.

- C. Interface 1/1 is bound to VLAN 20, and native VLAN is NOT changed.
- D. Interface 1/1 is bound to VLAN 20, and native VLAN is 20.

Answer: B

NEW QUESTION 143

A Citrix Administrator executed the following command in the Global Server Load Balancing (GSLB) environment:

```
set gslb site SiteB -triggerMonitor MEPDOWN
```

What will be the effect of this command to the default service monitoring behavior on the remote site?

- A. The service monitor will take precedence over Metric Exchange Protocol (MEP)
- B. The service monitor is invoked only when Metric Exchange Protocol (MEP) has marked the service as DOWN for any reason.
- C. The state of the GSLB service will always be controlled by Metric Exchange Protocol (MEP).
- D. The service monitor is invoked only when Metric Exchange Protocol (MEP) connectivity has been lost between SiteA and SiteB.

Answer: B

NEW QUESTION 147

Scenario: A Citrix Administrator has a Citrix ADC SDX with four VPX instances configured. The SDX has a 10GB bandwidth license that has been configured with dedicated bandwidth of 2GB for each instance. However, the administrator found that three instances do NOT ever reach the bandwidth limit, while one instance reaches the limit and needs 1GB more bandwidth to accommodate increased traffic requests.

What can the administrator change on the instance that requires more bandwidth, to meet traffic requirements?

- A. Configure burst capacity on the instance adding 1 GB of bandwidth with burst priority 0.
- B. Purchase an SDX license to increase the bandwidth on the instances.
- C. Configure burst capacity of 1GB with priority 10.
- D. Configure LA channel to increase the bandwidth.

Answer: C

NEW QUESTION 151

Which scenario will cause automatic high availability (HA) synchronization to fail?

- A. Manually forced synchronization
- B. A configuration change to the primary Citrix ADC
- C. Different build versions
- D. A force failover

Answer: C

NEW QUESTION 152

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 1Y0-204 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 1Y0-204 Product From:

<https://www.2passeasy.com/dumps/1Y0-204/>

Money Back Guarantee

1Y0-204 Practice Exam Features:

- * 1Y0-204 Questions and Answers Updated Frequently
- * 1Y0-204 Practice Questions Verified by Expert Senior Certified Staff
- * 1Y0-204 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 1Y0-204 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year